HANDLING AND LOGISTICS



MODULAR SYSTEM FOR TRANSPORT AND STORAGE OF NORM-BINS LINEN COLLECTING AND DISTRIBUTION TRUCKS TRUCKS FOR STERILIZED GOODS AND DRUGS TRANSPORT WASTE COLLECTING TRUCKS

www.spalatarii-curatatorii.ro 0756237877

Why ALUMINIUM

K 9 produces its transport trucks in anodised aluminium AIMg3. During manufacturing all trucks' components are anodised with a minimum thickness of 10 μm.



Innovative
Light
Resistant to the corrosion
Hygienic
Non-hygroscopic
Solid
Recyclable
Non-magnetic
Resistant to the ultraviolet rays
High thermal conductivity
allowing a fast drying
Resistant to the thermal
treatment of washing and
sterilization

This is aluminium

Sack-holder trucks

for collection of soiled linen and waste material




All components are suitable for washing, disinfection and easy replaceable.

Platform and lid in ABS. Light alloy anodised support, stainless steel fastening ring with rubber corners. 4 swivelling anti-noise grey rubber wheels Ø75 mm. with thread-guards.

The drawing out of the full sack is fast, easy and safe thanks to the support front opening and the large bottom platform.

The code refers to the truck only (without sack). Lids, pedals, brakes and push-handles are available on request.

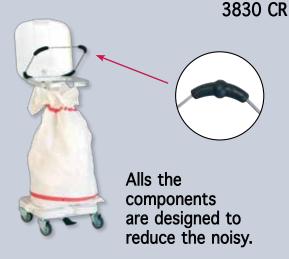



Lid's opening by pedal assures the staff's safety. The inner device of the structure is secure and strong.



All the sack-holders components are available as spare parts.
All models are anodised.






The front opening makes easier the sack's introduction.

The code refers to the truck only (without sack). Lids, pedals, brakes and push-handles are available on request.







3846 CR

Our sack-holders' strength is...



Push-handle available for all models.

The lid's opening on trucks with pedal is up to 60°. On request it can be supplied up to 98° as on trucks without pedal.

Sack's fastening by restraining ring with rubber corners.



Lids available in 7 colours.



Both fabrics and plastic sacks can't absolutely slide out.





Plastic lid with integrated hinge avoids any loosing risk.



On request the wheels with anti-noise grey rubber ring, can be equipped with brake.

The code refers to the truck only (without sack). Lids, pedals, brakes and push-handles are available on request.

Art.	Code	Ext. mm	Ø	Weight	Capacity
3830 CR	RO38300N001	390 x 410 x 880 H	75	4.80	1 sack
3835 CR	RO38350N001	785 x 410 x 880 H	75	8.60	2 sacks
3840 CR	RO38400N001	1180 x 410 x 880 H	75	11.60	3 sacks
3845 CR	RO38450N001	1575 x 410 x 880 H	75	18.10	4 sacks
3846 CR	RO38460N001	785 x 855 x 880 H	75	19.70	4 sacks
3850 QL	QL38500N006	355 x 450 x 290 H		1.15	1 sack



Hooking device of the shelving trolleys to the sack-holders: safe, fast, hygienic.

The trolleys 3950 CR, 3950/2 CR and 4000 CR can be equipped with this device. Suitable for washing and disinfection. Available assembled or in kit form.

Patent pending.





Suitable for the rear hooking of the sack-holders 2 sacks XA3950/3835





Suitable for the side hooking of the sack-holders 1 sack XA3950/3830



Pedal stopping on the floor allows a fast, safe and easy hooking.
On separated trolleys none of the components of the hooking device sticks out the bumpers.

	Accessories
Code	Description
XA3950/3830	Hooking device on trucks 3950 CR, 3950/2 CR and 4000 CR with sack-holder 1 sack art. 3830 CR.
XA3950/3835	Hooking device on trucks 3950 CR, 3950/2 CR and 4000 CR with sack-holder 2 sacks art. 3835 CR.



3950 CR 2 levels mm. 620 x 445 x 340 H

ABS anti-slip top surface with three sided edge 80 mm. h. 4 swivelling wheels Ø100 mm. with circular bumper.
Light alloy anodised body.

Light, strong suitable for washing and disinfection.



Capacity 210 litres



3950/2 CR

3 levels mm. 620 x 445 x 275 H

The doors are supplied on request only.



On request blue laminated (HPL) doors, opening up to 270°, with magnet lock device.



Capacity 268 litres



4000 CR

Light alloy top surface.

2 pushing handles.

4 swivelling wheels Ø100 mm. with circular bumper.


Light alloy anodised body.

Two doors in blue plastic laminated (HPL), opening up to 270°, with magnet lock device.


Light, strong suitable for washing and disinfection.




Capacity 390 litres







3 levels mm. 695 x 445 x 362 H

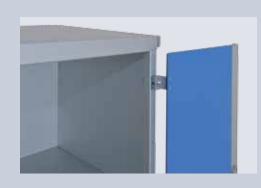

Two doors in blue plastic laminated (HPL), opening up to 270°, with magnet lock device.

Only on request for the models 3950 CR and 3950/2 CR.

The code and data refer to the trolley without linen.

Art.	Со	de	Ext. mm	Lt.	Ø	Weight
3950 CR	RH3	39500N001	740 x 535 x 1000 H	210	100	13.60
3950/2 CR	RH3	39500N002	740 x 535 x 1190 H	268	100	16.00
4000 CR	RH4	10000N001	815 x 535 x 1420 H	390	100	26.00
Accessories						
Code		Descriptio	Description			
KC3950001AN Doors for trolley 3950 CR						
KC3950002	٩N	Doors for tro	lley 3950/2 CR			





Polycarbonate dividers can be placed inside the drawer.



Light alloy drawers on telescopic rails are available for models 3950CR and 3950/2CR.

The drawer's front is available in blue version too.

The drawer can be placed either under the cover or under the shelf.

On request coloured doors.

Description	Code	Int. mm
Drawer with aluminium front	CS39500N001	560 x 405 x 120 H
Drawer with blue front	CS39500B001	560 x 405 x 120 H
Polycarbonate dividers	A601107	

Shelving trolleys and trolleys with drawers

3500 CR

Shelving trolleys for fresh linen distribution



3957 CR



Art.	Code	Ext. mm	Ø	Weight
3500 CR	RI35000N001	925 x 635 x 850 H	100	10.00
3957 CR	RH39570N001	750 x 535 x 975 H	100	31.00



Rubber bumper.

Front opening on 2/3 of the height for easy loading and unloading. Lid with hinges on 2/3 of the width and stop in open position.



Folding rims and polyamide corners for a better staff's protection.



2050 CR



Special realisation on request:
- partition wall at 1/2 or 2/3 of the length for the waste division - smooth walls.



All models are in **anodised light alloy.** Suitable for washing and disinfection.

Accessories on request:

- drain tap
- bottom with silicone seal



On request 2050 CR and 4500 CR trucks with rubber bumper can be equipped with tow bar, central brake and rotation fastening system.

Card holder A7.





Hinged door. Hinged lid at 2/3 of the depth. Drain tap standard.

4500 CR



Light alloy bumper.

Waste-material collection truck with hinged lid.



Anodised light alloy paper collection wheelie bin. Fire-proof bin material.




The code refers to the truck without accessories and without sacks.

Art.	Code	Int. mm	Ext. mm	Ø	Disp.	Weight	Lt.
3350 CR	RA33500N001	1000 x 600 x 610 H	1045 x 650 x 800 H	125	2 + 2	26.00	366
2050 CR	RD20500N001	1000 x 600 x 1190 H	1055 x 640 x 1440 H	160	2 + 2	37.50	714
4500 CR	RD45000N001	1300 x 700 x 1105 H	1365 x 760 x 1355 H	160	2 + 2	47.20	1006
3770 CR	RI37700N001	550 x 450 x 955 H	710 x 570 x 975 H	200	2	15.10	236
	WITH RUBBER BUMPER:						
2050 CR	RD20500N191	1000 x 600 x 1165 H	1100 x 650 x 1425 H	160	2 + 2	47.60	699
4500 CR	RD45000N003	1300 x 700 x 1085 H	1400 x 760 x 1340 H	160	2 + 2	59.20	987

Not perforated execution.



Smooth surfaces. Ribbed walls. Strong bottom frame and light alloy bumper.







Anodised light alloy truck with a cut-out on a long side. Not perforated.



Watertight **anodised light alloy** truck. Drain tap. Perforated double bottom.

	Non perforated trucks:						
Art.	Code	Int. mm	Ext. mm	Ø	Weight	Lt.	
BA 20	RABA200N002	1000 x 500 x 610 H	1030 x 530 x 770 H	100	16.70	305	
BA 20	RABA200N004	1000 x 600 x 610 H	1030 x 630 x 770 H	100	17.80	366	
BA 20	RABA200N010	920 x 680 x 685 H	950 x 710 x 875 H	125	20.40	428	
BA 20	RABA200N006	1300 x 700 x 610 H	1330 x 730 x 805 H	125	25.00	555	
BA 20	RABA200N008	1300 x 700 x 685 H	1330 x 730 x 880 H	125	27.00	623	
Art.	Code	Int. mm	Ext. mm	Disp.	Weight	Lt.	
1695 CR	RB16950N001	1470 x 900 x 670 H	1500 x 930 x 865 H	1-2-1	37.80	886	
858 CR	RG08580N001	1000 x 600 x 450 H	1030 x 630 x 735 H	2+2	31.60	270	
1380 CR	RC13800N009	700 x 560 x 560 H	720 x 580 x 710 H	2+2	12.20	220	
1380 CR	RC13800N011	950 x 550 x 600 H	970 x 570 x 750 H	2+2	14.10	313	

Perforated trucks:						
BA 20	RABA2002001	1000 x 500 x 610 H	1030 x 530 x 770 H	100	16.00	305
BA 20	RABA2002003	1000 x 600 x 610 H	1030 x 630 x 770 H	100	17.00	366
BA 20	RABA2002009	920 x 680 x 685 H	950 x 710 x 875 H	125	19.50	428
BA 20	RABA2002005	1300 x 700 x 610 H	1330 x 730 x 805 H	125	23.90	555
BA 20	RABA2002007	1300 x 700 x 685 H	1330 x 730 x 880 H	125	25.80	623



1380 CR

Not perforated execution, stiffening ribs on walls, anodised.

Anodised light alloy spring loaded bottom truck, with one or two springs according to the model.

Wheels in lozenge position or at the corners (see schedule). On request 4 swivelling wheels in position 2+2.










Optimization of the inner capacity. Strong, practical, light.



All the models are anodised and equipped with non-marking grey rubber wheels.

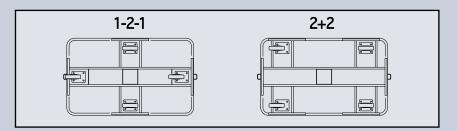

Springs are easily changeable. On request springs with reduced capacity.

Art.	Code	Int. mm	Ext. mm	Disp.	Weight	Lt.	=
680 CR	RM06800N186	1000 X 420 X 530 H	1080 x 450 x 770 H	2 + 2	32.00	223	32
680 CR	RM06800N002	1000 x 600 x 560 H	1080 x 630 x 800 H	1-2-1	34.80	336	47
680 CR	RM06800N005	1390 X 700 X 560 H	1470 x 730 x 800 H	1-2-1	49.00	545	95
680 CR	RM06800N334	1470 X 900 X 585 H	1550 X 930 X 850 H	1-2-1	72.20	774	85
680 CR	RM06800N014	1000 X 600 X 560 H	1080 x 630 x 800 H	2 + 2	35.10	336	47
680 CR	RM06800N013	1390 x 700 x 560 H	1470 x 730 x 800 H	2 + 2	49.30	545	95
680 CR	RM06800N335	1470 X 900 X 585 H	1550 X 930 X 850 H	2 + 2	72.20	774	85



Light alloy stacking boxes

Alu boxes



0

BA 12

Light alloy stacking boxes. Stiffening ribs on walls and bottom. Execution with perforation Ø5, or not perforated, with or without anodising.

Art.	Int. mm	Ext. mm	Lt
BA 12	740 x 460 x 560 H	755 x 475 x 575 H	190
BA 12	740 x 460 x 430 H	755 x 475 x 445 H	146
BA 12	740 x 460 x 270 H	755 x 475 x 285 H	92
BA 12	585 x 385 x 460 H	600 x 400 x 475 H	103
BA 12	585 x 385 x 360 H	600 x 400 x 375 H	81
BA 12	585 x 385 x 270 H	600 x 400 x 285 H	61



1670 CR

Light alloy frame supporting BA12 boxes. 4 swivelling wheels Ø80 mm. External height included box mm. 800. The code refers to the frame only.

Art.	Ext. mm	Ø
1670 CR	720 x 485	80

555 x 415

80

1670 CR

Dolly trolley for boxes, movable handle, epoxy-polyester finishing steel. 2 fixed and 2 swivelling wheels Ø80 mm. The code refers to the trolley only.

Art.	Ext. mm	Ø
1338 CR	800 x 490 x 800 H	80
1338 CR	645 x 415 x 800 H	80



Art.	Code	Int. mm	Ext. mm	Lt
2000 CS	SA2000NN001	550 x 350 x 220 H	600 x 400 x 240 H	42
2001 CS	SA2001NN001	350 x 250 x 180 H	400 x 300 x 200 H	16
2005 CS	SA2005NN001	550 x 350 x 380 H	600 x 400 x 400 H	73
2010 CS	SA2010NN001	750 x 350 x 310 H	800 x 400 x 330 H	81
2015 CS	SA2015NN001	750 x 550 x 380 H	800 x 600 x 400 H	157
2020 CS	SA2020NN001	750 x 550 x 580 H	800 x 600 x 600 H	239
2025 CS	SA2025NN001	850 x 450 x 350 H	900 x 500 x 370 H	134
2030 CS	SA2030NN001	1150 x 750 x 480 H	1200 x 800 x 500 H	414

ALU BOXES

Light alloy boxes with hinged lid equipped with an internal plastic seal and holding bands.

Pad lockable catches. Spring back handle. All the components are rust-proof. Alu boxes are weatherproof. Alu boxes are stackable with dimensions corresponding to the Euro pallet.


1 shelf



1560 CR 1610 CR



1550/232 CR





Strong non-twisting bottom frame in epoxy-polyester finishing steel.



All models are available with upper bumper, necessary for transport by lorries.



2 shelves



1550 CR 1600 CR



1580 CR

Truck with 2 movable shelves on the 2/3 of the length, and 1/3 with clothes hanger rail.

Ergonomic push-handle with double grip.

By the use of 2 hinged shelves, it is possible to employ only one truck for the distribution of fresh linen and the collection of waste linen.

Important transport freight reduction.

Trucks suitable for washing in tunnel before every delivery.



3020 CR

2 hinged shelves. 4 bumpers on the lid corners.



All around doors frame with labyrinth section for a perfect isolation of the contents.



Safety seal on the door.
Automatic cutting of the

seal at the door-handle

raising.






Cylindrical lock for a sure blocking door device.

By the vertical thumb-latch with wedge-shaped hooking on top and bottom, the door fastening is automatically safe.



All the cupboard trucks (2550 CR excluded) and models 2050 CR and 4500 CR with rubber bumper are ready in every moment for assembling of a strong tow bar and hooking peg in zinc-plated steel.







OP Container





OP Container

Suitable for the distribution of sets of sterilized linen and for the collection of dirty linen. 2 deep shaped perforated shelves.





2300 CR

2550 CR

Cupboard truck with one door. 2 hinged shelves. Suitable for narrow passages. Bottom dimensions = 1/2 Euro pallet.





2550 CR

2300 CR

Linen truck with rain and dust protection. Plastic movable locking curtain fixed to the rims with velcro. Anodised light alloy execution. Suitable for washing and disinfection.

Supplied in kit form

		WITHOUT UP	PER BUMPER:			
Art.	Code	Int. mm	Ext. mm	Ø	Weight	Lt.
2300 CR	RH23000N100	740 x 590 x 1425 H	800 x 600 x 1650 H	125	32.40	625
2550 CR	RH25500N001	700 x 540 x 1420 H	800 x 600 x 1660 H	125	41.50	540
3020 CR	RH30200N001	865 x 620 x 1405 H	965 x 700 x 1725 H	200	45.70	753
1550 CR	RH15500N001	1130 x 550 x 1420 H	1230 x 630 x 1740 H	200	70.00	883
1550/232 CR	RH15500N232	1130 x 550 x 1170 H	1230 x 630 x 1500 H	200	66.00	731
1560 CR	RH15600N001	1130 x 550 x 920 H	1230 x 630 x 1200 H	160	55.00	572
1580 CR	RH15800N001	1130 x 550 x 1420 H	1230 x 630 x 1740 H	200	70.50	883
1600 CR	RH16000N003	1300 x 630 x 1420 H	1400 x 710 x 1740 H	200	80.00	1162
1610 CR	RH16100N001	1300 x 630 x 920 H	1400 x 710 x 1200 H	160	62.00	753
		WITH UPPE	R BUMPER:			
OP Container	RH15500N161	865 X 465 X 1405 H	965 X 545 X 1690 H	125	53.00	565
1550 CR	RH15500N501	1130 x 550 x 1420 H	1230 x 630 x 1785 H	200	76.50	883
1550/232 CR	RH15500N532	1130 x 550 x 1170 H	1230 x 630 x 1545 H	200	72.50	731
1560 CR	RH15600N501	1130 x 550 x 920 H	1230 x 630 x 1245 H	160	61.50	572
1580 CR	RH15800N501	1130 x 550 x 1420 H	1230 x 630 x 1785 H	200	77.00	883
1600 CR	RH16000N503	1300 x 630 x 1420 H	1400 x 710 x 1785 H	200	87.00	1162
1610 CR	RH16100N501	1300 x 630 x 920 H	1400 x 710 x 1245 H	160	69.00	753



Independent brake on one or two swivelling wheels.





Rotation fastening system for trucks with internal length over 1000 mm. Fastening with pedal downwards.

All the cupboard trucks (2550 CR excluded) and the models 2050 CR and 4500 CR with rubber bumper can be equipped with central brake or rotation fastening device on 2 swivelling wheels, with pedal and control device in zinc-plated steel. Particularly strong and full metallic execution.

On request Superelastic wheels (see at page 24).





Rotation fastening system for trucks with internal length within 1000 mm. Fastening with pedal upwards.



Central brake





Internal and external label holders A4, A5, A7.





Why ALUMINIUM

K produces its transport trucks in anodised aluminium AIMg3. During manufacturing all trucks' components are anodised with a minimum thickness of 10 μm.



Innovative
Light
Resistant to the corrosion
Hygienic
Non-hygroscopic
Solid
Recyclable
Non-magnetic
Resistant to the ultraviolet rays
High thermal conductivity
allowing a fast drying
Resistant to the thermal
treatment of washing and
sterilization

This is aluminium

Sack-holder trucks

for collection of soiled linen and waste material




All components are suitable for washing, disinfection and easy replaceable.

Platform and lid in ABS. Light alloy anodised support, stainless steel fastening ring with rubber corners. 4 swivelling anti-noise grey rubber wheels Ø75 mm. with thread-guards.

The drawing out of the full sack is fast, easy and safe thanks to the support front opening and the large bottom platform.

The code refers to the truck only (without sack). Lids, pedals, brakes and push-handles are available on request.

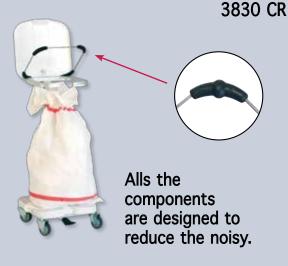



Lid's opening by pedal assures the staff's safety. The inner device of the structure is secure and strong.

Hygiene certificate

Cupboard trucks for sterile containers meet the hygienic requirements for drugs transport. Transported goods are perfectly protected.



Cupboard truck for sterile containers. **Anodised light alloy** body, stainless steel supporting shelves, capacity 6 trays 600 x 300 x 300 mm.h. Maximum capacity 600 x 400 x 360 mm.h.



All cupboard trucks are planned for washing and disinfection in tunnel.

1625 CR

Cupboard truck for sterile containers. Capacity 9 trays 600 x 300 x 300 mm.h.

1622 CR

Art.	Code	Int. mm	Ext. mm	Ø	Weight
1622 CR	RH16220N003	877 x 630 x 1220 H	977 x 710 x 1500 H	160	67.00
1625 CR	RH16250N010	1130 x 630 x 1220 H	1230 x 710 x 1500 H	160	77.00





3 vertical sections, with maximum capacity 12 sterile units or 12 containers in polypropylene with lid 530 x 325 x 200 mm. h. for collection of dirty instruments. Equipped with two push-handles on the two short sides.



Suitable for: the distribution of the containers with sterile goods.



Suitable for: the collection of the containers with goods to be sterilised.



Stopping system for containers in polypropylene.



3162CR

The codes refer to the trucks without shelves, accessories and trays.


Art.	Code	Ext. mm	Ø	Weight		
3165 CR	RH31650N004	1230 x 710 x 1585 H	160	114.80		
3162 CR	RH31620N001	977 x 710 x 1585 H	160	71.00		
ACCESSORIES						
Shelf	BLSFL3003	325 x 600		1.15		

2 vertical sections, with maximum capacity 8 sterile units or 8 containers in polypropylene with lid 530 x 325 x 200 mm. h. for collection of dirty instruments. Equipped with two push-handles on the two short sides.





All cupboard trucks for sterile containers have now modified doors for an ideal isolation of the contents.









Tight detail at the door's corners.




Telescopic shelf in bright wire stainless steel to make easier the bins handling.





A new system and new materials for the transport of sterile goods.





The combined use of anodised light alloy, nylon fibreglass and stainless steel really fits for the sterilising process and grants a decrease in weight and energy consumption.



The Shuttle System is suitable for the transport of sterile units DIN-NORM and ISO-NORM containers.



The shuttle reduces handling times and assures a perfect hygienic protection.




The cupboard trucks can receive: 1 shuttle with 2 vertical sections ISO-NORM 2 shuttles with 1 vertical section ISO-NORM 1 shuttle with 3 vertical sections STE-UNIT 2 shuttles with 1 vertical section STE-UNIT







The unloading platform, to be used in the ward, completes the SHUTTLE SYSTEM.







Movable stopper for 1/2 sterile unit.



The Shuttle System allows the return to the centre of the material to be sterilised.



In order to give a larger capacity, a better smoothness and to assure the total resistance to washing in tunnel, all the trucks equipped with wheels Ø160 or Ø200, on request can be supplied with SUPERELASTIC wheels, with double watertight ball-bearings.



Door stop in opening position up to 260° for tunnel washing, and 270° in resting positon.

Special construction with inner continuous hinge with tight rubber gasket.











Internal and external label holders A4, A5, A7.



3170 CR

Cupboard truck with 2 sections capacity 12 + 12 trays x 100 h.

Transport system with ISO-NORM 400 x 600 containers.
Sure, cheap, handy.
Nylon fibreglass rails with stopping system.
Anodised light alloy structure. Cupboard trucks with upper rubber bumper for outside transport.
Cupboard trucks 3150 CR, 3170 CR and 3180 CR are equipped with push-handle on the two short sides.



Cupboard truck with 3 sections capacity 12 + 12 + 12 trays x 100 h.



3130 GI

Cupboard truck with 1 section capacity 12 trays x 100 h. and 1 section with 2 movable shelves.



2170 CR



Cupboard truck with one vertical section suitable for ISO-Norm containers 40 x 60 and for STE-Units on wire shelf. Upper bumper only on request.

Art.	Code	Ext. mm	Ø	Vert. sect.	Containers	Weight	Capacity
2170 CR	RH21700N001	510 x 765 x 1575 H	160	1	600 x 400 x 100 H	47.00	10
3150 CR	RH31500N002	1400 x 710 x 1785 H	200	1	600 x 400 x 100 H	108.00	12
3130 CK	KH31300N002	1400 X / 10 X 1/65 H		1	2 shelves		
3170 CR	RH31700N002	977 x 710 x 1785 H	200	2	600 x 400 x 100 H	84.00	24
3180 CR	RH31800N002	1400 x 710 x 1785 H	200	3	600 x 400 x 100 H	110.00	36



Nylon fibreglass rails. Ánodised light alloy vertical profiles. Links in epoxy-polyester finishing steel. Height 2020 mm.

Every vertical section has a capacity of 14 trays 100 h.

Modular length according to request.
On request the rack can be realized in special dimensions suitable for STE containers.




Wire stainless steel shelf with back stopping system. 400x600 mm.





Wire stainless steel shelf with 3 pull-out rails for catheters. 400x600 mm.

Space optimisation.

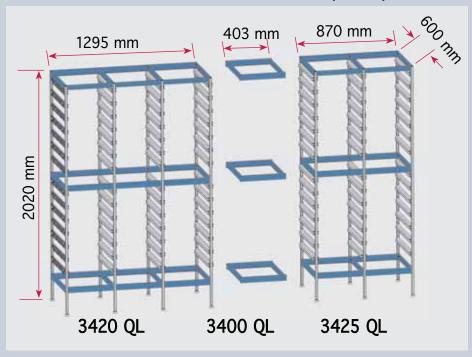

Art.	3420 QL
Code	QL34200N002
Ext. mm	1315 x 620 x 2020 H
Vert. sect.	3
Containers	600 x 400 x 100 H
Capacity	42
Art.	3425 QL
Code	QL34250N002
Ext. mm	890 x 620 x 2020 H
Vert. sect.	2
Containers	600 x 400 x 100 H
Capacity	28
Art.	3400 QL
Code	QL3400VN002
Containers	600 x 400 x 100 H
Capacity	14



Truck with 2 sections for ISO-NORM trays capacity 10 + 10 x 100 h. suitable for sterile containers too.


Truck for ISO-NORM trays capacity 10 x 100 h. suitable for sterile containers too.



3430 CR

3425 CR

Art.	Code	Ext. mm	Ø	Vert. sect.	Containers	Weight	Capacity
3425 CR	QR34250N002	915 x 655 x 1610 H	160	2	600 x 400 x 100 H	53.00	20
3430 CR	QR34300N002	670 x 520 x 1385 H	100	1	600 x 400 x 100 H	20.40	10

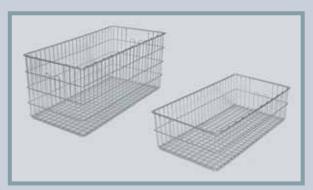

Bright wire stainless steel baskets, STE unit. Continuous wire finish anti-tear.

Code	Description / Ext mm.	Material
BLSFL0130	Wire basket 580 x 280 x 130 H	Stainless steel
BLSFL0260	Wire basket 580 x 280 x 260 H	Stainless steel

Bright wire stainless steel baskets ISO-NORM. Continuous wire finish anti-tear.



Cod.	Description / Ext mm.	Material
BLSFL6100	ISO basket 400 x 600 x 100 H	Stainless steel
BLSFL6200	ISO basket 400 x 600 x 200 H	Stainless steel

Container in polypropylene with lid for dirty instruments. Thermoresistant from -40°C to +100°C.

Container	BGDNN71100B	325 x 256 x 100 H	0.50
Container	BGDNN71100R	325 x 256 x 100 H	0.50
Container	BGDNN71200B	325 x 256 x 200 H	0.70
Container	BGDNN71200R	325 x 256 x 200 H	0.70
Container	BGDNN70100B	325 x 530 x 100 H	1.20
Container	BGDNN70100R	325 x 530 x 100 H	1.20
Container	BGDNN70200B	325 x 530 x 200 H	1.40
Container	BGDNN70200R	325 x 530 x 200 H	1.40




trays.

ABS trays.



Ext. mm.	Material	Colour	Code
400 x 600 x 50 H	ABS	Grey	BIBNA6050 G
400 x 600 x 110 H	ABS	Grey	BIBFA6100 G
400 x 600 x 200 H	ABS	Grey	BIBFA6200 G
400 x 600 x 50 H	Polycarbonate	Transparent	BIPNA6050 T
400 x 600 x 110 H	Polycarbonate	Transparent	BIPFA6100 T
400 x 600 x 200 H	Polycarbonate	Transparent	BIPFA6200 T

Description	Material	Colour	Code
Divider mm. 600 x 50 H	Polycarbonate	Transparent	BHPNA6050 T
Divider mm. 600 x 100 H	Polycarbonate	Transparent	BHPNA6100 T
Divider mm. 600 x 200 H	Polycarbonate	Transparent	BHPNA6200 T
Divider mm. 400 x 50 H	Polycarbonate	Transparent	BHPNA4050 T
Divider mm. 400 x 100 H	Polycarbonate	Transparent	BHPNA4100 T
Divider mm. 400 x 200 H	Polycarbonate	Transparent	BHPNA4200 T
Universal stopper	ABS	Grey	BLBNA0ST01
Universal card-holder	ABS	Grey	BLBNAOLAB





Universal card-holder (card not included).



Universal stopper.








Code	Ext. mm
BLSFL4013	600 x 400



Wire stainless steel shelf with back stopping system.

Code	Ext. mm
BLSFL4004	600 x 400



Transparent polycarbonate







Modular configuration







Modular system of transport and distribution with ISO-NORM trays and many changeable accessories. Available in three different heights. ABS anti-slip top surface with three sided edge 80 mm. h. 2 blue hinged laminated (HPL) doors, opening up to 270° with key lock. 4 swivelling non-marking rubber wheels Ø100 mm., with 2 total stop brakes. Circular bumpers at the corners.

4 swivelling non-marking rubber wheels Ø100 mm., with 2 total stop brakes. Circular bumpers at the corners. Light alloy **anodised body**.

Easy to clean.





3956 CR

Car with self-storing doors with key lock.
The upper door can be closed

separately.

The codes and data refer to the cart only without accessories and trays.

Art.	Code	Ext. mm	Ø	Weight
3955 CR	RE39550N001	740 x 535 x 1000 H	100	18.40
3955/2 CR	RE39550N002	740 x 535 x 1190 H	100	21.00
3955/3 CR	RE39550N003	740 x 535 x 1440 H	100	24.80
3956 CR	RE3956ON001	740 x 535 x 1190 H	100	23.50

Central lock.






All models with 2 total

The same construction

Different applications

Dispenser for 4, 5 or 6 tilt-out bins.

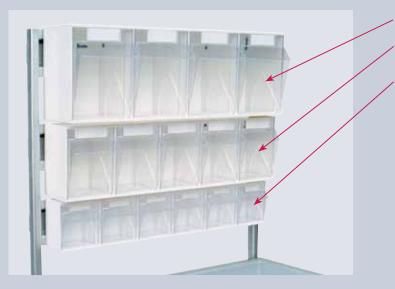

BDBNE6004 BDBNE6005 BDBNE6006



Autoclaveable instruments container in ABS BLNNH0002.



Round sharps container holder RE3955001AX.






Fold down work surface (closed position)


RE3955001BL Side function bar for accessories

Waste bag holder with lid 15 lt. (bags excluded) BLFFI0001



Fold down work surface (open position) - RE3955001PI



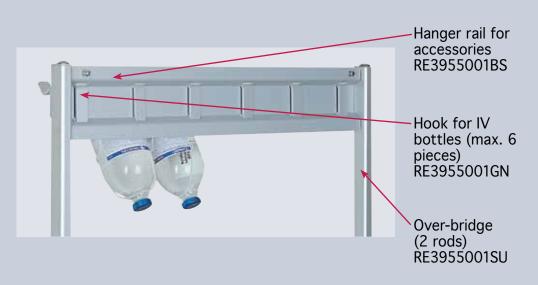



Disposable gloves holder RE3955001IN

Waste bin RE3955003AX



Waste bin holder BLDNG0001



Catheters and probes holder RE3955001PC



Disinfectant dispenser with drops collector RE3955002IN

Code	Dim. Ext. mm.
RE3955001SU	670 x 25 x 1670 H
RE3955001BS	670 x 22 x 105 H
BDBNE6004	600 x 168 x 207 H
BDBNE6005	600 x 183 x 164 H
BDBNE6006	600 x 91 x 113 H
RE3955001GN	
RE3955001BL	320 x 10 x 25 H
RE3955001AX	Ø 130 x 45 H
RE3955002AX	260 x 200 x 35 H
BLNNH0002	280 x 185 x 190 H

Code	Dim. Ext. mm.
RE3955003AX	250 x 180 x 35 H
BLDNG0001	280 x 185 x 130 H
RE3955001PC	105 x 70 x 450 H
RE3955001PI	390 x 325 x 35 H
RE3955001IN	140 x 110 x 225 H
RE3955002IN	220 x 85 x 295 H
BLFFI0001	300 x 200 x 450 H
BLSFL4001	400 x 600 x 13 H
BLSFL4003	400 x 600 x 55 H
YRU125C	Ø 125 = +30 H