

VARIOfit®

The perfect form

of transport



The VARIOfit® dead man's brake

2015

Easy
STOP®

since 2011

5-years
warranty



VARIOfit® New Releases

Folding pushbar trolley with 2 levels



Page 15

ESD push-handle dolly and Euro dolly



Page 26, 27

Various trolleys with dead man's brake



Page 34, 35, 85

Aluminium chair truck



Page 80

Cylinder trolley



Page 85

Stacking frame with drip tray




Page 93

Roll stand



Page 94

Roll truck

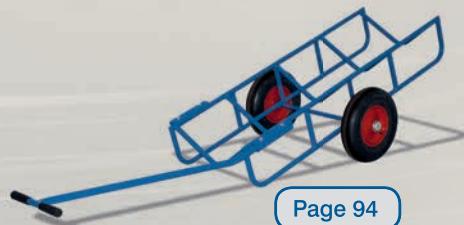

Page 94

Add-on frame for pallet dolly



Page 105

Pneumatic tyres with groove profile

- moves 30% easier
- groove profile absorbs less dirt
- low noise moving profile



Contents



VARIOfit® Catalog Download

Additional articles, Spare parts, Presentationtrolley	9 - 12
Platform trolleys, Box trolleys, ESD - trolleys, Dead man's handle, Table trolleys, Shelf trolleys, Serving trolley, Order-picking trolley, Document trolleys	13 - 44
Workshop trolleys, Table trolleys with pan	45 - 53
Sheet-material truck, -stand, -trolley, Workpiece-, Order-picking-, Carrier spar-, Euro container trolleys	54 - 62
Small order-picking trolleys, Material stands, Table transporter, Push-handle dollies, System dollies	63 - 67
Crate dollies, Long-goods trolley / dolly	68 - 69
Tyrehandling, Steel- / Aluminium trucks, Steel-cylindertruck -/trolley, Parcel trucks, Newspaper truck	71 - 87
Drumhandling, Drip trays, Cleaning trolley, Stacking frame with drip tray, Waste collection stand, Roll stand, Roll truck, Self-tipper	88 - 95
Hand trucks, Trailers, Two-wheeled platforms, Steel-frame dollies for pallets, Add-on frame for pallet dolly	96 - 105
Pallet converters	106 - 114
Dollies, Dollies collector, Triple-Dogs, Dollies Europa	115 - 117
Bridge plate / Ramp	118 - 119



CORDES  GOODS in motion

Behind every strong brand is a **strong manufacturer.**



VARIOfit® lets you and your customers profit from the flexibility of an experienced manufacturer.

Thanks to proven logistics and our narrow-aisle warehouse with more than 5000 pallet bays served by the latest equipment, direct delivery of even large quantities is no problem.

Developing customer-specific solutions and producing variants to special order is our day-to-day business. We can do this because we have the necessary design and production capacity and highly trained skilled personnel.

We are the competent contacts for resellers and their customers.

VARIOfit®, the **CORDES** brand for specialist equipment, has nearly half a century of manufacturing competence behind it.



VARIOfit® -
Only genuine with the Variofit logo

As a result, **CORDES** stands for quality products and for speedy, reliable delivery based on an efficient logistics chain.

VARIOfit.eu





good reasons for **VARIOfit[®]**



Logistics chain

With its efficient logistics chain, **CORDES** supplies direct to the end customer. This guarantees speedy delivery. It also means that products are normally dispatched within 5 working days – and the customer can depend on it.



MODULAR SYSTEM

Four basic platforms of different sizes form the base for sturdy bolt-on fitting of almost all superstructures. **VARIOfit[®]** products bearing this symbol allow trouble-free modification to cater for changed requirements. This keeps **VARIOfit[®]** affordable for the customer and ensures that it maintains its value.



Special orders!

VARIOfit[®], as the name suggests, stands for unusually variable trucks and trolleys. In addition to its special product variants, **VARIOfit[®]** offers virtually unlimited possibilities for modification to suit customers' individual wishes.



Mobile Service Unit

You need to repair or retrofit your **VARIOfit[®]** product? Our competent mobile assembly team will visit you on request. If necessary, we can repair or upgrade your **VARIOfit[®]** product on site. Your guarantee rights remain unchanged, of course.




Easy-running wheels

with wheel brakes and castor foot guards: Thanks to their new wheels with thermoplastic tyres, **VARIOfit[®]** trucks and trolleys leave no marks even on light-coloured floors. Their sealed precision ball bearings of deep-groove design are not only robust and impact-resistant, but also extremely easy-running. And it goes without saying that their swivel castors are equipped with wheel brakes and foot guards as required by EU standards.



Innovative L-section frames

Only **VARIOfit[®]** trucks have the L-section frame developed exclusively by Cordes to ensure maximum load-bearing capacity. This specially designed frame makes Variofit trucks and trolleys extremely robust and light.



Powder coating

After thorough preliminary treatment, **VARIOfit[®]** products are powder coated, then stove enamelled to optimise and enhance their surface finish. This makes them resistant to impacts and scratches and gives them the robustness they need for a long service life.



TÜV mark

TÜV (the German technical inspection authority) stands for quality and safety. Most **VARIOfit[®]** products bear this mark. The TÜV mark can be awarded to trolleys with a payload of up to 500 kg and trucks with a capacity of 250 kg.







Easy runners, distance **no problem**

With their maintenance-free precision deep-groove ball bearings and optimised tyres, these **VARIOfit®** wheels offer about 50% less initial resistance than normal castors. So the truck is easy to start moving even when heavily loaded. This saves time, money and effort in day-to-day use. And of course only **VARIOfit®** supplies them as standard with the **VARIOfit®** foot guard.

Conventional wheels need a lot of strength to set the truck in motion and keep it moving.

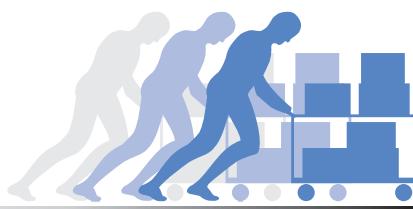

The **VARIOfit®** Easy-runner wheels need a minimum of effort to get the truck moving, even when heavily loaded. That also means less effort when pushing and reduces materials handling times.

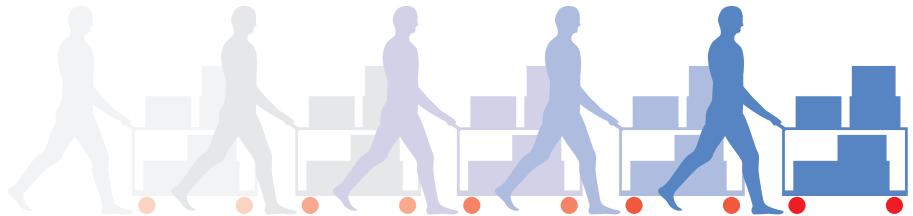

Combined with **EasySTOP**, the perfect solution





Dead man's brake

On pages 34, 35 and 85 you will find products with our VARIOfit® dead man's brake



- Convenient handling
- Safe steering with brake released
- Stops instantly if push-/ pull-bar is released
- Braking possible in all wheel positions
- Firm standing
- No danger of injury due to exposed Bowden cables or protruding metal edges
- Adjustable braking strength



Central foot brake

All VARIOfit® items marked with Button are fitted with EasySTOP central brake system as standard. **No Surcharge!**



Wheelsize	
Article no.	Wheel diam.
rsa-125.500	125
rsa-160.500	160
rsa-200.500	200

Order numbers for relevant wheel sizes

- Easy stop: Simply press the EasySTOP brake once – this arrests both swivel castors.
- Easy go: Return the pedal to its starting position – quick and easy.
- Safety: Fixed position with easy access by trolley operator permits instant braking
- Adjustable braking action
- Pedal can be operated with normal shoes or safety footwear
- Braking always possible regardless of wheel position
- Ergonomic: Light actuation, short travel
- Compatible: Available for most types of castor in common use



Wheel types / layouts



Plain bearing:

Simple, largely maintenance-free bearing.
Impact-resistant. Polyamide bushing. Suitable for operation in wet conditions. For low-speed trucks and trolleys.



Roller bearing:

Robust, sturdy, largely maintenance-free bearing. Low bearing friction. Impact-resistant. Permanent lubrication. The most widely used bearing for low-speed trucks and trolleys.



Deep-groove ball bearing:

Precision ball bearing, easy-running, even with heavy loads and at higher speeds.



Swivel castors with top plates,



bolt-hole castors


What is a castor?

A castor consists of at least one wheel, a fixed or swivelling fork, an axle and a means of attachment (e.g. to a truck or trolley). There are four basic types of castors. Swivel castors with top plates, fixed castors with top plates, bolt-hole castors, and swivel castors with spigot.



Two swivel and two fixed castors

- Commonest layout
- good directional stability
- good cornering

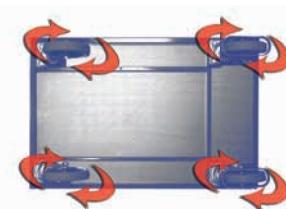

Four swivel castors

- Highly manoeuvrable, suitable for cramped conditions
- improved directional stability thanks to lockable swivel castors



One swivel and two fixed castors

- Suitable for light loads
- highly manoeuvrable
- tends to tip if load concentrated at front



Two swivel and two fixed rollers, rhombic layout

- Fixed castors are slightly higher
- good directional stability
- tends to tip if load concentrated at corners

Pneumatic wheel	Polyamide wheel	Solid-rubber wheel				
	Suitable for uneven ground, e.g. with differences in level, especially outdoors.					
<ul style="list-style-type: none"> - Roller bearing - low carrying capacity - good ride comfort - abrasion-resistant 	<ul style="list-style-type: none"> - Roller bearing - high carrying capacity - resistant to chemicals (salts, fats, acids, alkalies) 	<ul style="list-style-type: none"> - Deep-groove ball bearing - high carrying capacity - low noise - low rolling resistance - high wear-resistance 				
Electrostatic discharge wheels (ESD)	Polyurethane wheels					
	Suitable where there is a need to prevent static charging of the trolley and payload.	For use in the industrial sector with heavy loads and for mixed indoor/outdoor applications. Polyurethanes can be selected specifically for your field of application.				
<ul style="list-style-type: none"> - Deep-groove ball bearing - high carrying capacity - low noise 		<table border="1"> <thead> <tr> <th>96° Shore</th> <th>92° Shore</th> </tr> </thead> <tbody> <tr> <td>Particularly suitable in high-friction situations, e.g. for motorised trolleys.</td><td>Suitable for high-stress situations on rough ground, e.g. thresholds and outdoor areas.</td></tr> </tbody> </table>	96° Shore	92° Shore	Particularly suitable in high-friction situations, e.g. for motorised trolleys.	Suitable for high-stress situations on rough ground, e.g. thresholds and outdoor areas.
96° Shore	92° Shore					
Particularly suitable in high-friction situations, e.g. for motorised trolleys.	Suitable for high-stress situations on rough ground, e.g. thresholds and outdoor areas.					
<ul style="list-style-type: none"> - Deep-groove ball bearing - high carrying capacity - low noise 	<ul style="list-style-type: none"> - Deep-groove ball bearing - high carrying capacity - low noise - high abrasion resistance - high cut resistance - low rolling resistance - high wear resistance 	<ul style="list-style-type: none"> - Deep-groove ball bearing - high carrying capacity - low noise - high abrasion resistance - high cut resistance - low rolling resistance - high wear resistance 				

Additional articles



Accessories to catalogue programme. The prices shown are the additional price when ordered with articles from the catalogue. Prices when ordered separately available on request. Additional prices for wheels are for 1 set = 4 wheels instead of standard wheels (solid rubber).



Even the standard **VARIFIT®** wheels with grey thermoplastic tyres cater for a wide range of applications. They are suitable for a variety of surfaces and are resistant to a large number of aggressive substances (e.g. numerous oils, gases, acids, solvents and organic substances).



Pneumatic wheels (Caution:
lower carrying capacity) Set

Article no.	Load cap.	Wheel diam.
	kg	mm
rsa-150.002	150 kg	150 instead 125 SR*
rsa-200.003	225 kg	200 instead 160, 200 SR*
rsa-230.003	390 kg	230 instead 160, 200 SR*



Polyamide wheels set

Article no.	Wheel diam.
	mm
rsa-125.014	125
rsa-150.014	150
rsa-200.014	200



Elastic-solid-rubber wheels set

Article no.	Wheel diam.
	mm
rsa-125.012	125
rsa-160.018	160
rsa-200.012	200



Electrically conductive solid-rubber wheels (ESD) set

Article no.	Wheel diam.
	mm
rsa-125.016	125
rsa-160.016	160
rsa-200.016	200



Polyurethane wheels set (96° Shore)

Article no.	Wheel diam.	Load cap.
	mm	kg
rsa-200.065	200	1050



Polyurethane wheels set (92° Shore)

Article no.	Wheel diam.	Load cap.
	mm	kg
rsa-200.063	200	1050



Revolving buffers suitable for narrow passages, e.g. to protect walls from damage, scratches etc. 100 mm diameter, light grey plastic. This increases the overall width by 70 mm. 1 set = 4 buffers. Not adjustable - through as ex-factory equipment. Cannot be retrofitted

Article no.	Dimension
	mm
zsw-000.002	100 x 24 mm




Galvanised steel load surface: galvanised steel sheet, folded over load surface

Article no.	for Loading surface
	mm
zsw-700.500	1000 x 700 mm
zsw-800.500	1200 x 800 mm



Plastic load surface, abrasion-resistant surface, weather-resistant, resistant to oil and most acids, recyclable.

Article no.	for Loading surface
	mm
zsw-700.600	1000 x 700 mm
zsw-800.600	1200 x 800 mm




Clipboard: Wood with paper grip and pencil holder. Attached by tube clamps.

Article no.	Format
	Din
zsw-000.000	A4 high
zsw-000.003	A4 transversely



Protective strip made of plastic profile, attached around the basic frame. Protects door frames and walls from damage, scratches etc. Cannot be retrofitted

Article no.	High
	mm
zsw-000.030	30



4 Swivel castors

Article no.	TR	This makes the trolley highly manoeuvrable, it can turn on the spot.
	P	
rsa-000.000	TR	
rsa-000.004	P	
rsa-000.005	ER	

TR = Thermoplastic rubber tyres,

P = Pneumatic wheels

ER = Elastic-solid-rubber wheels





Central foot brake
Article no. rsa-125.500




Wheelsize

Article no.	Wheel diam.
	mm
rsa-125.500	125
rsa-160.500	160
rsa-200.500	200

We equip your VARIOfit® item with EasySTOP the new central brake system. Articles marked with can be combined with the brake system.

Order numbers for relevant wheel sizes



Pegboard tool panel for workshop trolley
Article no. zsw-100.500



Drawer divider set
Article zsw-985.003




Material crate
Article no. fk-140.000



Plastic crate
Article no. fk-040.004



Outlet cock
Article no. zsw-000.500



Holder selection
Article no. zsw-180.000



Hang-on wire basket
Article no. zu-so-1073

Additional articles

Drawer divider set, for the pages 28, 46 - 50

Article no.	Weight
	kg
zsw-600.604	2,5
zsw-985.003	1,5

Material crate, page 46, 56

Article no.	Size	Color
	mm	
fk-140.000	230 x 140 x 130	red
fk-140.001	290 x 140 x 130	blue
fk-105.000	85 x 105 x 45	green
fk-105.001	160 x 105 x 75	yellow

Plastic crate, Page 62

Article no.	Dimension	Load cap.
	mm	l
fk-040.000	600 x 400 x 220	45
fk-040.004	600 x 400 x 170	35

Outlet cock for Articles from page 53, 92, 93, 95

Article no.	
zsw-000.500	Outlet cock, for draining liquids for articles with sheet-steel trough as ex-factory equipment

Holder selection, page 46

Article no.	
zsw-180.000	18-parts
zsw-280.000	28-parts

Hang-on wire basket, page 16

Article no.	Dimension	Weight
zu-so-1073	a 520 b 200 c 230	kg 2,5

for existing horizontal or vertical tube

Spare parts



VARIOfit®
The perfect form
of transport

Safety handles

Article no.

kca-000.160



Safety handles
Article no. kca-000.160

Plastic skids

Article no.

kap- 710.009	sk-710.005, -014, -201, -217 ap-710.005, -107, -211, -214
-----------------	--



Plastic skids
Article no. kap-710.009

plastic cap for truckwheel

Article no. Ø

	mm
k00-000.186	117



plastic cap
Article no. k00-000.186

- moves 30% easier
- groove profile absorbs less dirt
- low noise moving profile

pneumatic tyres for all trucks

Article no. Wheel diam.

lug-260.008	mm
	260 x 85
incl. fixing parts	



pneumatic tyres
Article no. lug-260.008

puncture-proof tyres for all trucks

Article no. Wheel diam.

lug-260.011	mm
	260 x 85
incl. fixing parts	



puncture-proof tyres
Article no. lug-260.011

solid-rubber tyres for all trucks

Article no. Wheel diam.

ebg-250.007	mm
	250 x 60
incl. fixing parts	



solid-rubber tyres
Article no. ebg-250.007

Additional carrying bars for all trucks
on page 74 up to 84 available.

Additional carrying bar for trucks

Article no.	Weight	Lenght
gsk-1156	kg	mm
gsk-1156	3,0	850
carrying bar		




carrying bars
Article no. gsk-1156

Gas pressure spring

Article no. Version

k00-000.228	new	only for wheeltrucks
k00-000.178	old	only for wheeltrucks
incl. fixing parts		




Gas pressure spring

OUR presentationtrolley

available in 4 languages

VARIOfit
The perfect form
of transport

We have fitted out a VARIOfit® shelf trolley to give you at least a small idea of the huge range of VARIOfit® products. You will be impressed by the great variety of sack trucks. Experience our **EasySTOP** braking system and the smoothness of the precision deep-groove ball bearings used in our wheels. Read all about the thermoplastic wheels that you can find under many of our VARIOfit® products. Our trolley also contains a selection of the proven Cordes solutions for storage and transport of bulky goods. We will be glad to supply a presentation trolley for your showroom. Just call us.

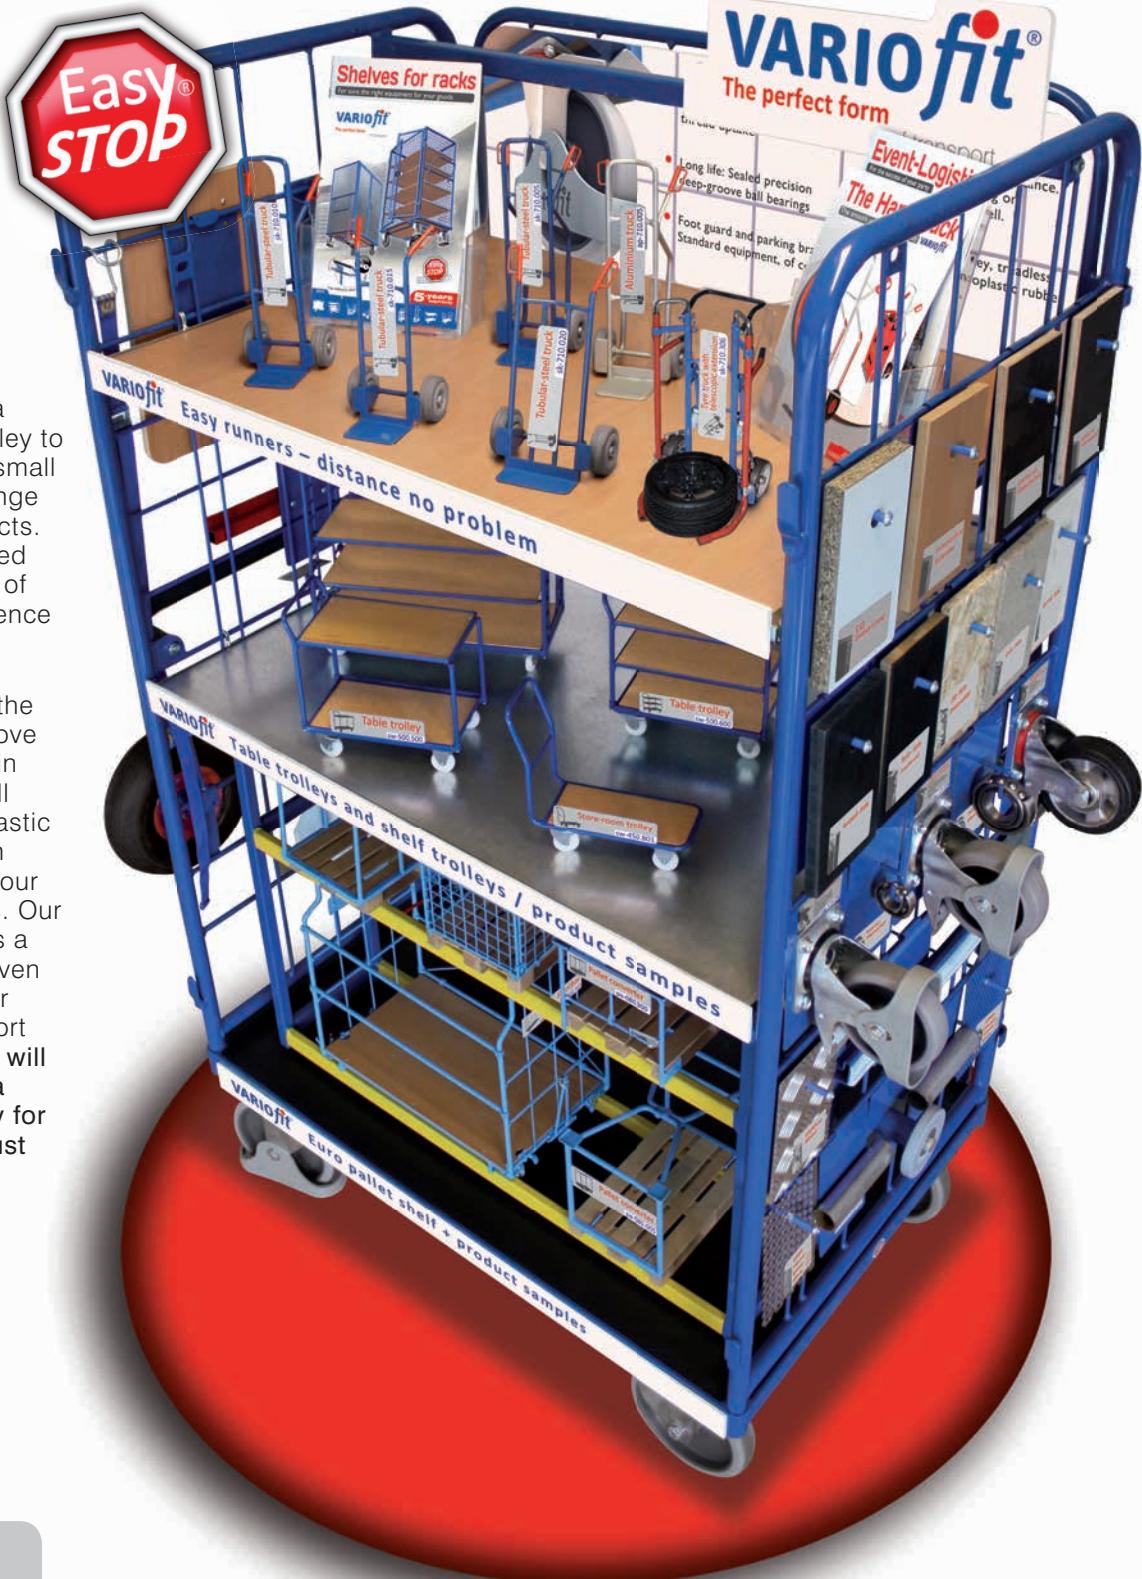

by **VARIOfit**®



store-room trolleys

VARIOfit[®]

Platform trolleys





Basic platform trolleys / tubular steel pushbar trolleys



Basic platform trolley
Article no. sw-500.000

Basic platform trolleys / tubular steel pushbar trolleys

Modular system; Base structure with innovative frame section; Load surface of wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact-resistant and scratchresistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Basic platform trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.000	910	500	250	910	500	20,5	400	160
sw-600.000	1060	600	290	1060	600	25,0	500	200
sw-700.000	1060	700	290	1060	700	26,0	500	200
sw-800.000	1260	800	290	1260	800	31,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Pushbar trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.100	975	500	966	880	500	24,0	400	160
sw-600.100	1125	600	1006	1030	600	28,5	500	200
sw-700.100	1125	700	1006	1030	700	30,0	500	200
sw-800.100	1325	800	1006	1230	800	34,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Pushbar trolley
Article no. sw-500.100



Pushbar trolley
Article no. sw-500.119



Pushbar trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.119	975	500	927	880	500	20,5	250	125
sw-600.119	1125	600	927	1030	600	24,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Double-end pushbar trolley
Article no. sw-500.219



Double-end pushbar trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.219	1040	500	927	850	500	25,0	250	125
sw-600.219	1190	600	927	1000	600	29,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Folding pushbar trolleys



Folding pushbar trolleys

Welded steel construction; folding pushbar; Load surface of wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 EasySTOP swivel castors and 2 fixed castors




See page 35 for folding pushbar trolley with maximum-safety dead man's brake

Folding pushbar trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-450.802	820	470	936	720	450	16,0	150	125
sw-600.802	1000	620	975	900	600	24,0	250	160

EasySTOP swivel castors and foot guards for your safety.

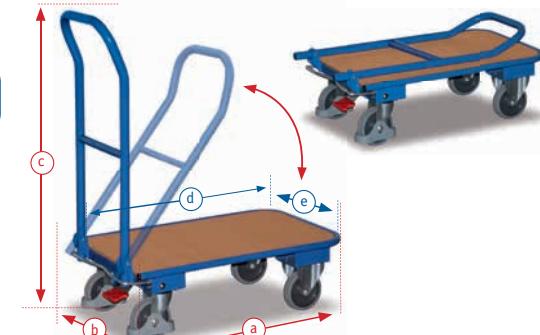

Folding pushbar trolley Article no. sw-450.802

Folding trolley with 2 pushbars

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-450.803	855	470	936	720	450	23,0	150	125

EasySTOP swivel castors and foot guards for your safety.



Folding trolley with 2 pushbars Article no. sw-450.803

Folding trolley with 2 pushbars

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-600.812	1035	620	975	900	600	33,0	250	160

EasySTOP swivel castors and foot guards for your safety.



Folding pushbar trolley with 2 shelves Article no. sw-450.827

Folding pushbar trolley with 2 shelves

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-450.827	855	470	936	720	450	26,0	150	125

EasySTOP swivel castors and foot guards for your safety.



Folding pushbar trolley with 2 shelves Article no. sw-450.827

Aluminium folding pushbars

Welded aluminium construction; folding pushbar; Load surface of diamond-tread plate; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 EasySTOP swivel castors and 2 fixed castors

Aluminium folding pushbar trolley with 2 shelves

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
ap-450.808	855	470	936	720	450	17,0	150	125

EasySTOP swivel castors and foot guards for your safety.



Aluminium folding pushbar trolley with 2 shelves Article no. ap-450.808



Aluminium folding pushbar trolley with diamond-tread load surface


Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
ap-450.803	820	450	936	720	450	11,0	150	125
ap-600.803	995	600	985	900	600	19,0	150	160
ap-600.807	995	600	985	900	600	19,0	250	160

EasySTOP swivel castors and foot guards for your safety.



Aluminium folding pushbar trolley with diamond-tread load surface Article no. ap-450.803





C+C trolleys

VARIOfit
The perfect form
of transport



C+C trolley
Article no. sw-500.108

C+C trolleys

Trolley nestable; Load surface of wood-based board, surface finish beech or waterproof bonded plywood, surface finish screen printed, anti-slip; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



[Hang-on wire basket, page 10](#)

C+C trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.108	992	645	965	880	500	26,0	400	160
sw-700.108	1142	845	1005	1030	700	37,0	500	200

[Swivel castors with wheel brakes and foot guards for your safety.](#)



C+C trolleys with load surface of waterproof bonded plywood, surface finish screen printed

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.111	992	645	965	880	500	28,0	400	160
sw-600.111	1142	745	1005	1030	600	32,5	500	200
sw-700.111	1142	845	1005	1030	700	35,0	500	200

[Swivel castors with wheel brakes and foot guards for your safety.](#)



C+C trolleys with 2 load surfaces of waterproof bonded plywood, surface finish screen printed

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.112	992	645	965	880	500	39,5	400	160
sw-600.112	1142	745	1005	1030	600	47,5	500	200
sw-700.120	1142	845	1005	1030	700	51,5	500	200

[Swivel castors with wheel brakes and foot guards for your safety.](#)



C+C trolleys with load surface of waterproof bonded plywood, surface finish screen printed, and 4 side frames

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.114	950	645	955	880	447	31,5	400	160
sw-600.114	1100	745	995	1030	547	35,5	500	200
sw-700.121	1100	845	995	1030	647	38,0	500	200

[Swivel castors with wheel brakes and foot guards for your safety.](#)




C+C trolley
Article no. sw-500.114

Trolley bay starter unit for C+C trolley



Trolley bay starter unit for C+C trolleys

Welded tubular steel; Surface hot galvanised; Including initial chain for coin lock; Rows can be extended by adding accessories; Suitable for all standard C+C trolleys

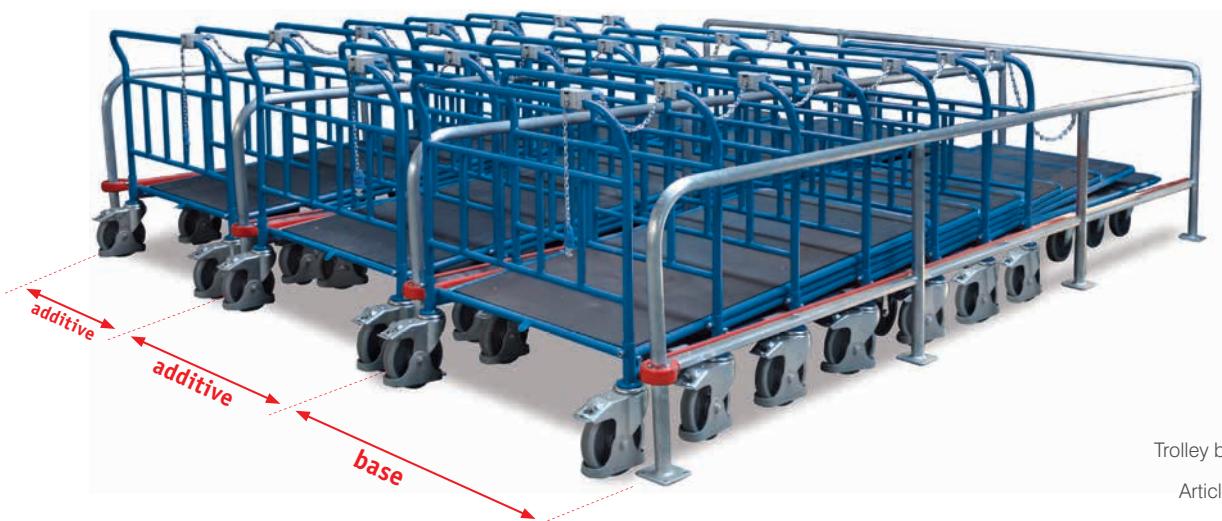

Trolley bay starter unit for
C+C trolleys
Article no. sw-640.500

Add-on row for starter unit

Article no.	Dimension			Loading surface	
	a	b	c	d	e
sw-640.500	4000	710	800	3960	640
sw-740.500	4000	810	800	3960	740
sw-840.500	4000	910	800	3960	840

with 1 piece initial chain for coin lock

The following bay capacities are possible:

approx. 10 C+C trolleys per row, load surface 880 x 500 mm
approx. 9 C+C trolleys per row, load surface 1030 x 600 mm
approx. 9 C+C trolleys per row, load surface 1030 x 700 mm

Additional Articles

Article no.	Dimension		
	a	b	c
zsw-640.500	4000	640	800
zsw-740.500	4000	740	800
zsw-840.500	4000	840	800

with 1 piece initial chain for coin lock



Add-on row for starter unit
Article no. zsw-640.500



C+C trolley security / coin lock with chain

Article no.	chain lenght	
	mm	
zsw-135.001	350	



C+C trolley security
Article no. zsw-135.001



Tubular steel pushbar trolleys / store-room trolleys



Tubular-steel pushbar trolley
Article no. sw-500.103



Tubular-steel pushbar trolley
Article no. sw-450.103



Tubular-steel pushbar trolley
Article no. sw-500.105



Store-room trolley
Article no. sw-450.801



Store-room trolley
Article no. ap-421.000

Tubular-steel pushbar trolleys

Modular system; Load surface of wood-based board, surface finish beech; Transverse strut in pushbar; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Tubular-steel pushbar trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.103	950	500	966	850	500	21,5	400	160
sw-700.103	1100	700	1006	1000	700	26,0	400	200
sw-700.104	1300	700	1006	1200	700	30,0	400	200

Swivel castors with wheel brakes and foot guards for your safety.



Light version tubular steel pushbar trolleys with one horizontal tube

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-450.103	950	450	910	850	450	18,0	200	125
sw-600.109	1100	600	910	1000	600	25,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.



Tubular-steel pushbar trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.105	950	500	966	850	500	22,5	400	160
sw-700.105	1100	700	1006	1000	700	27,5	400	200
sw-700.106	1300	700	1006	1200	700	31,0	400	200

Swivel castors with wheel brakes and foot guards for your safety.

Store-room trolleys

Robust welded steel or aluminium construction; Transverse strut in pushbar; Load surface of wood-based board; surface finish beech, or waterproof bonded plywood, surface finish screen printed, anti-slip. Steel store-room trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors

Store-room trolleys of welded steel construction

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-450.801	1070	450	910	890	450	15,5	200	125
sw-600.800	1220	600	910	1040	600	19,0	200	125

EasySTOP swivel castors and foot guards for your safety.

Store-room trolleys of welded aluminium construction

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
ap-421.000	1020	440	925	847	440	8,0	200	125

EasySTOP swivel castors and foot guards for your safety.

System trolleys with board sides




System trolleys with board sides

Modular system trolley; Base structure with innovative frame section; Load surface, end and side walls of wood-based board, surface finish beech. Trolley powder-coated RAL 5010 gentian blue, permanent surface protection, impactresistant and scratch-resistant. Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings, thread guard and foot guard, 2 swivel castors with wheel brakes and 2 fixed castors

Single-end trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.102	975	500	966	880	500	26,0	400	160
sw-600.102	1125	600	1006	1030	600	31,0	500	200
sw-700.102	1125	700	1006	1030	700	33,0	500	200
sw-800.102	1325	800	1006	1230	800	38,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.

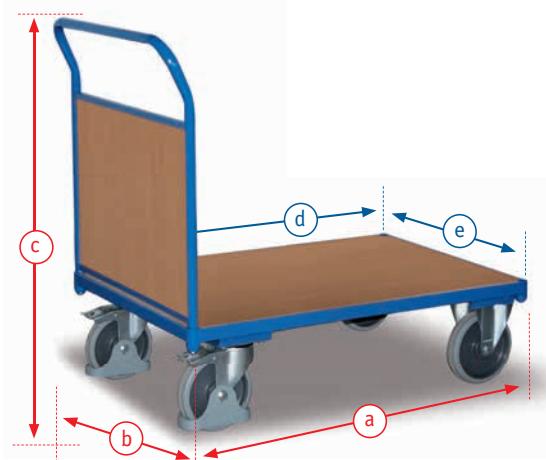

Single-end trolley
Article no. sw-500.102

Double-end trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.202	1040	500	966	850	500	31,0	400	160
sw-600.222	1190	600	1006	1000	600	37,0	500	200
sw-700.202	1190	700	1006	1000	700	40,0	500	200
sw-800.202	1390	800	1006	1200	800	45,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Double-end trolley
Article no. sw-500.202

Three-sided trolleys, side wall removable

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.302	1040	500	966	850	476	36,5	400	160
sw-600.302	1190	600	1006	1000	576	43,0	500	200
sw-700.302	1190	700	1006	1000	676	45,5	500	200
sw-800.302	1390	800	1006	1200	776	52,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Three-sided trolley
Article no. sw-500.302

Four-sided trolleys, side walls removable

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.400	1040	500	966	850	452	41,5	400	200
sw-600.400	1190	600	1006	1000	552	48,5	500	200
sw-700.400	1190	700	1006	1000	652	51,0	500	200
sw-800.400	1390	800	1006	1200	752	59,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Four-sided trolley
Article no. sw-500.400



System trolleys with mesh sides



Single-end trolley
Article no. sw-500.101

System trolleys with mesh sides

Modular system; Base structure with innovative frame section and wood-based board, surface finish beech; Mesh side and end walls; mesh size 50 x 50; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Single-end trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.101	975	500	966	880	500	25,0	400	160
sw-600.101	1125	600	1006	1030	600	29,5	500	200
sw-700.101	1125	700	1006	1030	700	31,5	500	200
sw-800.101	1325	800	1006	1230	800	36,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Double-end trolley
Article no. sw-500.201

Double-end trolleys

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.201	1040	500	966	850	500	29,0	400	160
sw-600.201	1190	600	1006	1000	600	34,5	500	200
sw-700.201	1190	700	1006	1000	700	36,5	500	200
sw-800.201	1390	800	1006	1200	800	42,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Three-sided trolley,
Article no. sw-500.301

Three-sided trolleys, side wall removable

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.301	1040	500	966	850	476	33,0	400	160
sw-600.301	1190	600	1006	1000	576	39,0	500	200
sw-700.301	1190	700	1006	1000	676	41,0	500	200
sw-800.301	1390	800	1006	1200	776	47,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Four-sided trolley
Article no. sw-500.401

Four-sided trolleys, side walls removable

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.401	1040	500	966	850	452	37,5	400	160
sw-600.401	1190	600	1006	1000	552	43,0	500	200
sw-700.401	1190	700	1006	1000	652	45,5	500	200
sw-800.401	1390	800	1006	1200	752	53,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty trolleys




Heavy-duty trolleys

Base structure with innovative frame section; Load surface, side and end walls of waterproof bonded plywood, surface finish screen printed, anti-slip; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Elastic on cast aluminium wheels with foot guard; ball-bearing hubs; 2 swivel castors with wheel brakes and 2 fixed castors

Pushbar trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-700.180	1128	700	1006	1026	700	37,5	1000	200
sw-800.180	1328	800	1006	1226	800	43,0	1000	200
sw-800.181	1728	800	1006	1626	800	49,5	1000	200
sw-800.184	2128	800	1006	2026	800	60,5	1000	200

Swivel castors with wheel brakes and foot guards for your safety.

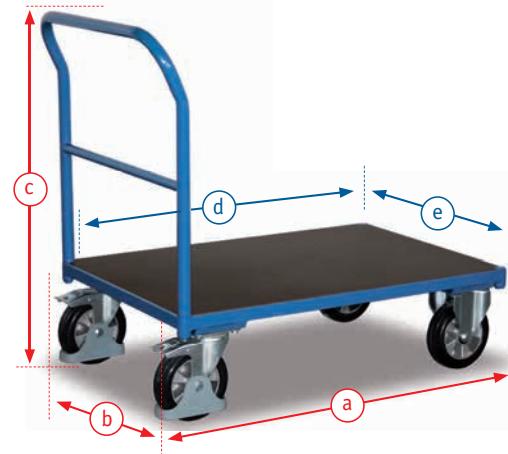

Pushbar trolley
Article no. sw-700.180



Single-end trolley
Article no. sw-700.182



Double-end trolley
Article no. sw-700.212



Three-sided trolley, side wall removable
Article no. sw-700.322



Four-sided trolley, side walls removable
Article no. sw-700.465

Single-end trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-700.182	1128	700	1006	1026	700	40,0	1000	200
sw-800.182	1328	800	1006	1226	800	46,5	1000	200
sw-800.183	1728	800	1006	1626	800	53,0	1000	200
sw-800.185	2128	800	1006	2026	800	64,0	1000	200

Swivel castors with wheel brakes and foot guards for your safety.

Double-end trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-700.212	1197	700	1006	993	700	46,5	1000	200
sw-800.212	1397	800	1006	1193	800	54,0	1000	200
sw-800.213	1797	800	1006	1593	800	61,0	1000	200
sw-800.226	2197	800	1006	1993	800	73,0	1000	200

Swivel castors with wheel brakes and foot guards for your safety.

Three-sided trolleys, side wall removable

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-700.322	1197	700	1006	993	688	56,0	1000	200
sw-800.322	1397	800	1006	1193	788	67,5	1000	200
sw-800.323	1797	800	1006	1593	788	76,5	1000	200
sw-800.324	2197	800	1006	1993	788	85,5	1000	200

Swivel castors with wheel brakes and foot guards for your safety.

Four-sided trolleys, side walls removable

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-700.465	1197	700	1006	993	676	62,5	1000	200
sw-800.465	1397	800	1006	1193	776	75,0	1000	200
sw-800.299	1797	800	1006	1593	776	86,5	1000	200
sw-800.466	2197	800	1006	1993	776	98,0	1000	200

Swivel castors with wheel brakes and foot guards for your safety.



Heavy-duty trolleys

3 different sizes; various carrying capacities; with or without waterproof bonded plywood base, surface finish screen printed, anti-slip; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors; 1200 kg carrying capacity and over: elastic solid-rubber tyres on cast aluminium wheels; ball-bearing hubs; foot guard; 2 swivel castors with wheel brakes and 2 fixed castors; side and end height: 800 mm; post length: 600 mm; load surface height: 305 mm



Version TR
Article no. zu-1229



Basic model
Article no. zu-1230



Stanchion trolley
Article no. sw-2000



Single-end trolley
Article no. sw-2002



Double-end trolley
Article no. sw-2003



Three-sided trolley
Article no. sw-2007



Four-sided trolley
Article no. sw-2004

Heavy-duty trolleys

Basic model

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
zu-1225	TR	1380	880	305	1380	880	50,0	500	200
zu-1226	ER	1380	880	305	1380	880	51,0	1200	200
zu-1227	TR	1680	880	305	1680	880	53,0	500	200
zu-1228	ER	1680	880	305	1680	880	54,0	1200	200
zu-1229	TR	2080	880	305	2080	880	59,0	500	200
zu-1230	ER	2080	880	305	2080	880	60,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Stanchion trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
sw-1310	TR	1380	880	905	1300	800	52,0	500	200
sw-1300	ER	1380	880	905	1300	800	53,0	1200	200
sw-1610	TR	1680	880	905	1600	800	55,0	500	200
sw-1600	ER	1680	880	905	1600	800	56,0	1200	200
sw-2010	TR	2080	880	905	2000	800	61,0	500	200
sw-2000	ER	2080	880	905	2000	800	62,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Single-end trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
sw-1312	TR	1510	880	1105	1340	880	62,0	500	200
sw-1302	ER	1510	880	1105	1340	880	63,0	1200	200
sw-1612	TR	1810	880	1105	1640	880	66,0	500	200
sw-1602	ER	1810	880	1105	1640	880	67,0	1200	200
sw-2012	TR	2210	880	1105	2040	880	74,0	500	200
sw-2002	ER	2210	880	1105	2040	880	75,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Double-end trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
sw-1313	TR	1640	880	1105	1300	880	72,0	500	200
sw-1303	ER	1640	880	1105	1300	880	73,0	1200	200
sw-1613	TR	1940	880	1105	1600	880	76,0	500	200
sw-1603	ER	1940	880	1105	1600	880	77,0	1200	200
sw-2013	TR	2340	880	1105	2000	880	84,0	500	200
sw-2003	ER	2340	880	1105	2000	880	85,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Three-sided trolleys, side wall removable

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
sw-1317	TR	1640	880	1105	1300	840	78,0	500	200
sw-1307	ER	1640	880	1105	1300	840	79,0	1200	200
sw-1617	TR	1940	880	1105	1600	840	86,0	500	200
sw-1607	ER	1940	880	1105	1600	840	87,0	1200	200
sw-2017	TR	2340	880	1105	2000	840	96,0	500	200
sw-2007	ER	2340	880	1105	2000	840	97,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres


Four-sided trolleys, side walls removable

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.	
	a	b	c	d	e				
sw-1314	TR	1640	880	1105	1300	800	84,0	500	200
sw-1304	ER	1640	880	1105	1300	800	85,0	1200	200
sw-1614	TR	1940	880	1105	1600	800	96,0	500	200
sw-1604	ER	1940	880	1105	1600	800	97,0	1200	200
sw-2014	TR	2340	880	1105	2000	800	108,0	500	200
sw-2004	ER	2340	880	1105	2000	800	109,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Box trolleys

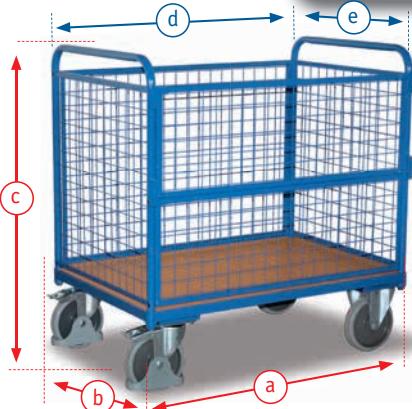

Box trolley
Article no. sw-700.404



Box trolley
Article no. sw-700.405



Box trolley
Article no. sw-700.407



Box trolley, open
Article no. sw-700.414



Box trolley
Article no. sw-700.415

Box trolleys

Modular system; Base structure with innovative frame section; Load surface wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratchresistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors; Usable height 800 mm; All trolleys with flap-down half wall on one side

Box trolleys with welded-in mesh 50 x 50 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-700.404	1060	715	1091	1000	645	50,5	500	200
sw-800.404	1260	815	1091	1200	745	57,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Box trolleys with board panels

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-700.406	1060	715	1091	1000	645	68,0	500	200
sw-800.406	1260	815	1091	1200	745	78,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Box trolleys

Angle-steel construction; welded; with tubular pushbar; Load surface and sides of wood-based board, surface finish beech; With staples for padlock; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Box trolleys with welded-in mesh 50 x 50 mm, double-flap lid - lies flat against side, lockable (facility for padlock)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-700.405	1130	732	1109	977	677	68,5	500	200
sw-800.405	1330	832	1109	1177	777	78,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Box trolleys with wood-based boards, double-fold lid - lies flat against side, lockable (facility for padlock)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-700.407	1130	732	1109	970	670	88,0	500	200
sw-800.407	1330	832	1109	1170	770	102,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Steel Box trolleys with single-flap lid - lies flat against side, with 2 gas pressure springs, lockable (facility for padlock)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-700.415	1165	732	1069	990	690	91,5	500	200
sw-800.415	1365	832	1069	1190	790	107,0	500	200

Steel Box trolleys, open

Article no.	1130	718	1064	990	690	71,0	500	200
sw-700.414	1330	818	1064	1190	790	81,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Box trolleys / Side-frame trolleys

VARIOfit
The perfect form
of transport



Box trolley
Article no. sw-500.457



Box trolley
Article no. sw-500.402



Side-frame trolley
Article no. sw-600.200

Box trolleys / Side-frame trolleys

Modular system; Base structure with innovative frame section; load surface wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Box trolleys, side height 200 mm, mesh sides 50 x 50 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e	kg	kg	mm
sw-500.457	975	500	966	850	452	32,0	400	160
sw-600.457	1125	600	1006	1000	552	37,5	500	200
sw-700.457	1125	700	1006	1000	652	39,5	500	200
sw-800.457	1325	800	1006	1200	752	45,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Box trolleys, side height 200 mm, individually removable sides

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e	kg	kg	mm
sw-500.402	975	500	966	850	452	32,0	400	160
sw-600.402	1125	600	1006	1000	552	36,5	500	200
sw-700.402	1125	700	1006	1000	652	40,0	500	200
sw-800.402	1325	800	1006	1200	752	45,0	500	200


Swivel castors with wheel brakes and foot guards for your safety.

Side-frame trolleys with 2 board sides, side height 746 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e	kg	kg	mm
sw-600.200	1060	600	1036	1060	540	45,5	500	200
sw-700.200	1060	700	1036	1060	640	47,0	500	200
sw-800.200	1260	800	1036	1260	740	54,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Side-frame trolleys



Side-frame trolleys with 2 mesh side frames 50 x 50 mm, side-frame height 746 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.239	1060	600	1036	1060	540	37,5	500	200
sw-700.231	1060	700	1036	1060	640	39,0	500	200
sw-800.237	1260	800	1036	1260	740	47,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Side-frame trolley
Article no. sw.600.239

Side-frame trolleys with 2 tubular side walls, side height 746 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.203	1060	600	1036	1060	540	37,0	500	200
sw-700.203	1060	700	1036	1060	640	38,5	500	200
sw-800.203	1260	800	1036	1260	740	44,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Side-frame trolley
Article no. sw-600.203

Side-frame trolleys with 4 tubular side frames, side-frame height 746 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.204	910	500	981	910	440	29,5	400	160
sw-600.204	1060	600	1021	1060	540	34,0	500	200
sw-700.204	1060	700	1021	1060	640	35,0	500	200
sw-800.204	1260	800	1021	1260	740	41,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Side-frame trolley
Article no. sw-500.204



ESD trolleys (electrostatic discharge)

VARIOfit
The perfect form
of transport



ESD trolleys

Modular system; Base structure of innovative frame section; load surfaces of electrically conductive faced chipboard light grey; Trolley powder-coated RAL 7024 graphite grey; electrically conductive; permanent surface protection; impact- and scratch-resistant; Electrically conductive thermoplastic rubber tyres on plastic wheels with ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

ESD table trolleys with 2 load surfaces, edge 12 mm high

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.557	975	524	980	850	500	34,5	250	125
sw-600.557	1125	624	980	1000	600	42,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.



ESD trolley
Article no. sw-500.657

ESD table trolleys with 3 load surfaces, edge 12 mm high

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.657	975	524	980	850	500	46,0	250	125
sw-600.657	1125	624	980	1000	600	57,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.



ESD trolley
Article no. sv-500.562

ESD Heavy-duty table trolleys with 2 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.562	1040	500	875	850	500	41,0	400	160
sw-600.562	1140	600	915	1000	600	51,0	500	200
sw-700.562	1140	700	915	1000	700	62,0	500	200
sw-800.562	1340	800	915	1200	800	69,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



ESD trolley
Article no. sw-500.662

ESD Heavy-duty table trolleys with 3 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.662	1040	500	875	850	500	55,0	400	160
sw-600.662	1140	600	915	1000	600	69,0	500	200
sw-700.662	1140	700	915	1000	700	72,0	500	200
sw-800.662	1340	800	915	1200	800	86,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Note: These trolleys are suitable for use in situations where there is a need to prevent static charging of the payload or the materials handling equipment, e.g. plastics, electronic devices etc.

ESD shelf trolleys with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.257	910	500	986	850	500	50,0	250	160
sw-600.257	1060	600	986	1000	600	55,5	250	160
sw-700.257	1060	700	986	1000	700	61,5	250	160
sw-800.257	1260	800	986	1200	800	76,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.



ESD trolley
Article no. sw-500.257



ESD trolley
Article no. sw-500.258

ESD shelf trolleys, high, with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.258	910	500	1524	850	500	50,5	250	160
sw-600.258	1060	600	1524	1000	600	60,5	250	160
sw-700.258	1060	700	1524	1000	700	67,0	250	160
sw-800.258	1260	800	1524	1200	800	81,5	250	160

Swivel castors with wheel brakes and foot guards for your safety.



ESD trolley
Article no. sw-500.259



ESD - Euro system dolly
Article no. sw-410.536



ESD - Push-handle dolly
Article no. sw-450.832

ESD - Euro system dolly with 2 load surfaces and 10 mm edge

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-410.516	680	420	654	610	410	19,0	250	125
sw-410.536	680	420	654	610	410	20,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

ESD - Push-handle dolly with 2 board load surfaces, heights 185 / 770 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.832	891	450	883	603	450	16,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Light table trolleys



Table trolley
Article no. sw-500.501



Table trolley
Article no. sw-500.603



Table trolley
Article no. sw-600.504



Table trolley
Article no. sw-500.500

Also available as ESD version on page 26



Table trolley
Article no. sw-500.600

Also available as ESD version on page 26



Table trolley
Article no. sw-600.503

Light table trolleys

Modular system; Base structure with innovative frame section; Load surfaces of wood-based board, surface finish beech; set in angle-steel frame, edge = 12 mm high; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Table trolleys with 2 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.501	1023	524	850	850	500	28,0	250	125
sw-600.501	1173	624	850	1000	600	33,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Table trolleys with 3 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.603	1023	524	850	850	500	37,0	250	125
sw-600.601	1173	624	850	1000	600	45,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Table trolleys with 2 load surfaces and 2 lockable drawers, drawer divider set available as accessory
Drawer divider set - additional Articles on page 9 (zsw-600.604)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.504	1173	624	850	1000	600	45,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Table trolleys with 2 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.500	975	524	1010	850	500	28,0	250	125
sw-600.500	1125	624	1010	1000	600	34,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Table trolleys with 3 load surfaces

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-500.600	975	524	1010	850	500	37,5	250	125
sw-600.600	1125	624	1010	1000	600	45,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Table trolleys with 2 load surfaces and 2 lockable drawers, drawer divider set available as accessory
Drawer divider set - additional Articles on page 9 (zsw-600.604)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.503	1125	624	1010	1000	600	45,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys



Heavy-duty table trolleys

Modular system; Base structure with innovative frame section and wood-based board, surface finish beech, or waterproof bonded plywood, surface finish screen printed, anti-slip; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings or elastic solid-rubber tyres on cast aluminium wheels with ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Heavy-duty table trolleys with 2 wood-based load surfaces covered with galvanised sheet

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-700.505	1190	700	921	1000	700	52,0	500
sw-800.505	1390	800	921	1200	800	63,5	500

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys with 2 load surfaces

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.504	1040	500	905	850	500	37,0	400
sw-600.510	1190	600	921	1000	600	42,0	500
sw-700.500	1190	700	921	1000	700	47,0	500
sw-800.500	1390	800	921	1200	800	52,5	500

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys with 2 load surfaces of waterproof bonded plywood, surface finish screen printed

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-700.530	1190	700	921	993	700	59,5	1000
sw-800.502	1390	800	921	1193	800	77,0	1000
sw-800.511	1790	800	921	1593	800	87,0	1000
sw-800.514	2190	800	921	1993	800	103,5	1000

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys with 3 load surfaces

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.650	1040	500	905	850	500	43,5	400
sw-600.512	1190	600	921	1000	600	53,5	500
sw-700.600	1190	700	921	1000	700	59,0	500
sw-800.600	1390	800	921	1200	800	69,5	500

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys with 3 load surfaces of waterproof bonded plywood, surface finish screen printed

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-700.617	1190	700	921	993	700	66,0	1000
sw-800.617	1390	800	921	1193	800	98,5	1000
sw-800.618	1790	800	921	1593	800	118,0	1000
sw-800.619	2190	800	921	1993	800	137,0	1000

Swivel castors with wheel brakes and foot guards for your safety.

Heavy-duty table trolleys with 4 load surfaces

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-700.700	1190	700	1260	1000	700	74,5	500
sw-800.700	1390	800	1260	1200	800	88,0	500

Swivel castors with wheel brakes and foot guards for your safety.



Heavy-duty table trolley Article no. sw-700.505



Also available as ESD version on page 26



Heavy-duty table trolley Article no. sw-700.530



Also available as ESD version on page 26



Heavy-duty table trolley Article no. sw-700.617



Heavy-duty table trolley Article no. sw-700.700



Table trolleys



Table trolley with pushbar
Article no. sw-500.503

Table trolleys

Modular system; Load surfaces of wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Table trolleys with pushbar

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.503	955	505	967	850	500	31,5	400	160
sw-700.503	1105	705	1007	1000	700	39,5	400	200
sw-700.504	1305	705	1007	1200	700	46,0	400	200

Swivel castors with wheel brakes and foot guards for your safety.



Table trolley
Article no. sw-500.502



Table trolleys with 2 load surfaces, removable upper shelf (capacity 80 kg)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.502	1040	500	927	850	500	28,5	200	125
sw-600.502	1190	600	927	1000	600	34,5	200	125

Swivel castors with wheel brakes and foot guards for your safety.



Steel table trolley
Article no. st-402.000

Table trolleys

Welded steel or aluminium construction; Load surfaces of wood-based board, surface finish beech; edge 20 mm high; Steel table trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Steel table trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
st-402.000	1090	600	970	970	570	33,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.



Aluminium table trolley
Article no. ap-412.000

Aluminium table trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-412.000	1085	600	970	970	570	24,5	200	125

Swivel castors with wheel brakes and foot guards for your safety.

Parcel trolleys



Parcel trolleys

Modular system; Base structure with innovative frame section and wood-based board, surface finish beech; Optional removable shelves for insertion at 120 mm intervals; Mesh sides and ends, mesh size 120 x 120 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Three-sided parcel trolleys, high

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.306	1039	527	1776	850	500	43,5	160
sw-600.306	1189	627	1816	1000	600	51,5	200
sw-700.306	1189	727	1816	1000	700	59,5	200
sw-800.306	1389	827	1816	1200	800	67,5	200

Swivel castors with wheel brakes and foot guards for your safety.



Three-sided parcel trolley Article no. sw-500.306

Three-sided parcel trolleys, low

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.313	1039	527	1176	850	500	36,5	160
sw-600.313	1189	627	1216	1000	600	43,0	200
sw-700.313	1189	727	1216	1000	700	50,0	200
sw-800.313	1389	827	1216	1200	800	57,0	200

Swivel castors with wheel brakes and foot guards for your safety.



Three-sided parcel trolley Article no. sw-500.313

Additional articles for parcel trolleys and shelf trolleys

Article no.	Dimension	for Loading surface	Weight	Load cap.	
				mm	kg
zsw-500.218	890 x 480	850 x 500	7,5	80	Extra shelf incl. angle support
zsw-600.218	1040 x 580	1000 x 600	11,5	80	Extra shelf incl. angle support
zsw-700.218	1040 x 680	1000 x 700	11,5	80	Extra shelf incl. angle support
zsw-800.218	1240 x 780	1200 x 800	15,5	80	Extra shelf incl. angle support
gsw-500.304	1525 x 820	850 x 500	7,5	-	Extra side, high
gsw-700.304.2	1525 x 970	1000 x 700	8,0	-	Extra side, high
gsw-800.304.2	1525 x 1170	1200 x 800	9,5	-	Extra side, high

Four-sided parcel trolleys, high

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.405	1039	547	1776	850	500	48,5	160
sw-600.405	1189	647	1816	1000	600	57,5	200
sw-700.403	1189	747	1816	1000	700	67,0	200
sw-800.403	1389	847	1816	1200	800	76,5	200

Swivel castors with wheel brakes and foot guards for your safety.



Four-sided parcel trolley Article no. sw-500.405

Four-sided parcel trolleys, low

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-500.420	1039	547	1176	850	500	40,0	160
sw-600.420	1189	647	1216	1000	600	47,5	200
sw-700.220	1189	747	1216	1000	700	55,0	200
sw-800.220	1389	847	1216	1200	800	62,5	200

Swivel castors with wheel brakes and foot guards for your safety.



Four-sided parcel trolley Article no. sw-500.420



Shelf trolleys

Base structure with innovative frame section; Load surface and shelves of wood-based board, surface finish beech; capacity per shelf 80 kg; Mesh sides and ends, mesh size 120 x 120 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Shelf trolley
Article no. sw-500.235



Shelf trolley
Article no. sw-500.236



Additional backwall with
folding top half
Article no. gsw-700.305



Shelf trolley
Article no. sw-500.237

Shelf trolleys

Shelf trolleys with 2 ends and 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.235	1033	517	1176	850	500	53,5	400	160
sw-600.235	1183	617	1216	1000	600	65,0	500	200
sw-700.215	1183	717	1216	1000	700	68,5	500	200
sw-800.215	1383	817	1216	1200	800	81,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

For additional sides and shelves, see page 31and 32

Shelf trolleys, high, with 2 ends and 4 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.236	1033	517	1776	850	500	67,5	400	160
sw-600.236	1183	617	1816	1000	600	81,0	500	200
sw-700.216	1183	717	1816	1000	700	86,0	500	200
sw-800.216	1383	817	1816	1200	800	104,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Additional articles for shelf trolleys

Article no.	Dimension	for Loading surface		Weight	
		mm	mm		
gsw-500.303	925 x 820	850	500	5,5	Additional backwall low
gsw-700.303.2	925 x 970	1000	600	6,5	Additional backwall low
gsw-700.303.2	925 x 970	1000	700	6,5	Additional backwall low
gsw-800.303.2	925 x 1170	1200	800	8,5	Additional backwall low

Additional backwall with folding top half

gsw-500.305	1525 x 820	850 x 500	11,5	Additional backwall with folding top half
gsw-600.305	1525 x 970	1000 x 600	12,5	Additional backwall with folding top half
gsw-700.305	1525 x 970	1000 x 700	12,5	Additional backwall with folding top half
gsw-800.305	1525 x 1170	1200 x 800	13,5	Additional backwall with folding top half

Shelf trolleys, high, with 2 ends and 5 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.237	1033	517	1776	850	500	73,0	400	160
sw-600.237	1183	617	1816	1000	600	91,0	500	200
sw-700.217	1183	717	1816	1000	700	97,5	500	200
sw-800.217	1383	817	1816	1200	800	119,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolleys with 4 ends and 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.460	1039	527	1176	850	500	64,5	400	160
sw-600.460	1189	627	1216	1000	600	77,5	500	200
sw-700.460	1189	727	1216	1000	700	79,5	500	200
sw-800.460	1389	827	1216	1200	800	95,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-500.460

Shelf trolleys, high, with 4 ends and 4 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.311	1039	527	1776	850	500	82,5	400	160
sw-600.311	1189	627	1816	1000	600	98,0	500	200
sw-700.311	1189	727	1816	1000	700	102,0	500	200
sw-800.311	1389	827	1816	1200	800	122,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-500.311

Shelf trolleys with 3 ends and 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.307	1039	527	1176	850	500	59,0	400	160
sw-600.307	1189	627	1216	1000	600	71,0	500	200
sw-700.303	1189	727	1216	1000	700	73,0	500	200
sw-800.303	1389	827	1216	1200	800	87,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-500.307

Shelf trolleys, high, with 3 ends and 4 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.304	1039	527	1776	850	500	75,0	400	160
sw-600.304	1189	627	1816	1000	600	89,0	500	200
sw-700.304	1189	727	1816	1000	700	94,0	500	200
sw-800.304	1389	827	1816	1200	800	113,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-500.304

Shelf trolleys, high, with 3 ends and 5 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.305	1039	527	1776	850	500	82,5	400	160
sw-600.305	1189	627	1816	1000	600	101,0	500	200
sw-700.305	1189	727	1816	1000	700	105,5	500	200
sw-800.305	1389	827	1816	1200	800	128,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-500.305



Shelf trolleys

Base structure with innovative frame section; Load surface and shelves of wood-based board, surface finish beech; capacity per shelf 80 kg; Mesh sides and ends, mesh size 120 x 120 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Shelf trolley
Article no. sw-800.250



Shelf trolleys, high, with 3 folding shelves and three sides with mesh

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-700.250	1200	700	1880	1000	700	75	500	200
sw-800.250	1400	800	1880	1200	800	85	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolley
Article no. sw-800.238



Shelf trolleys, high, with 3 folding shelves

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-700.238	1200	700	1880	1000	700	68	500	200
sw-800.238	1400	800	1880	1200	800	78,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with dead man's brake


Modular system; Base structure with innovative frame section; tubular pushbar with dead man's control, Load surface and shelves of wood-based board, surface finish beech; Shelves for variable insertion at 120 mm intervals; capacity per shelf 80 kg; Mesh sides and ends, mesh size 120 x 120 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 swivel castors with dead man's brake and 2 fixed castors



Shelf trolleys hight with dead man's brake

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-700.280	1183	717	1816	1000	700	86,0	500	200

Swivel castors with dead man's brake and foot guards for your safety



Shelf trolley
Article no. sw-700.280



Shelf trolleys low with dead man's brake

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.265	1060	600	1524	1000	600	55,0	250	160

Swivel castors with dead man's brake and foot guards for your safety



Shelf trolley
Article no. sw-600.265





Table and pushbar trolleys with dead man's brake

Modular system; shelf construction with innovative L-profile; tubular pushbar with dead man's brake load surfaces made from wood-based panels with beech surface finish; shelf frames of angled steel; load surfaces with 12-mm high edges; trolley powder-coated, RAL 5010 gentian blue; durable surface protection; impact and scratch resistant; grey non-marking thermoplastic rubber tyres, with precision deep-groove ball bearings; thread guard and foot guard; 2 swivel castors with dead man's brake and 2 fixed castors



Table trolley with 2 load surfaces and dead man's brake

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.548	1125	624	980	1000	600	34,0	250	125

Swivel castors with dead man's brake and foot guards for your safety

Shelf trolley
Article no. sw-600.548



Pushbar trolley with dead man's brake

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.125	800	600	848	780	580	22,0	250	125

Swivel castors with dead man's brake and foot guards for your safety

Pushbar trolley
Article no. sw-600.125



Folding pushbar trolley with dead man's brake

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.831	815	450	940	720	450	16,0	150	125

Swivel castors with dead man's brake and foot guards for your safety

Folding pushbar trolley
Article no. sw-450.831




Shelf trolleys

Shelf trolleys with EasySTOP

Angle-steel construction; Fully welded with mesh sides 50 x 50 mm; Base and shelves of wood-based board, surface finish beech; Shelf supports for variable insertion at 100 mm intervals; Tubular pushbar; Trolley powder coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors; Trolleys with double doors have espagnolette bolt lock with T-handle or lever



Shelf trolley
Article no. sw-700.410



Roller shutter
door on request

Shelf trolleys with 1 fixed and 4 variable shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.410	1115	730	1800	1040	670	114,0	500	200
sw-800.410	1315	830	1800	1240	770	139,0	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolley
Article no. sw-700.440

Shelf trolleys with 1 fixed shelf, hinged double door with lever handle

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.440	1115	810	1800	1040	670	87,0	500	200
sw-800.440	1315	910	1800	1240	770	99,5	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolley
Article no. sw-700.411

Shelf trolleys with 1 fixed and 4 variable shelves, double door with lever handle

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.411	1115	810	1800	1040	670	137,0	500	200
sw-800.411	1315	910	1800	1240	770	165,5	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolley
Article no. sw-700.987

Shelf trolleys with 1 fixed and 4 variable shelves, double door with T-handle

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.987	1115	730	1800	1040	670	137,0	500	200
sw-800.987	1315	830	1800	1240	770	165,5	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolleys with EasySTOP

Galvanised steel sheet; Fully welded; Base and shelves of wood-based board, surface finish beech; Shelf supports for variable insertion at 100 mm intervals; Tubular pushbar; Steel parts powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors; Trolleys with double doors have espagnolette bolt lock with lever or T-handle



Shelf trolleys with 1 fixed and 4 variable shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.412	1115	730	1800	1040	670	130,5	500	200
sw-800.412	1315	830	1800	1240	770	159,0	500	200

EasySTOP swivel castors and foot guards for your safety.

The wing door opens 270° and is flush with the frame.



Shelf trolleys with 1 fixed and 4 variable shelves, double door with lever handle

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.413	1115	810	1800	1040	670	157,0	500	200
sw-800.413	1315	910	1800	1240	770	191,0	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolley
Article no. sw-700.412



Shelf trolleys with 1 fixed and 4 variable shelves, double door with T-handle

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.988	1115	730	1800	1040	670	157,0	500	200
sw-800.988	1315	830	1800	1240	770	191,0	500	200

EasySTOP swivel castors and foot guards for your safety.



Shelf trolley
Article no. sw-700.988



Shelf trolleys, low

Modular system; Base structure with innovative frame section; Base, shelves and trays of wood-based board, surface finish beech; Tray height for all models 60 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratchresistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Shelf trolley
Article no. sw-500.205

Shelf trolleys with 2 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.205	910	500	986	850	500	33,5	250	160
sw-600.205	1060	600	986	1000	600	40,0	250	160
sw-700.239	1060	700	986	1000	700	45,5	250	160
sw-800.239	1260	800	986	1200	800	54,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.206	910	500	986	850	500	39,5	250	160
sw-600.206	1060	600	986	1000	600	48,0	250	160
sw-700.240	1060	700	986	1000	700	56,0	250	160
sw-800.240	1260	800	986	1200	800	68,5	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 2 shelves and 1 tray

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.210	910	500	986	815	455	40,0	250	160
sw-600.210	1060	600	986	965	555	48,5	250	160
sw-700.241	1060	700	986	965	655	57,0	250	160
sw-800.241	1260	800	986	1165	755	69,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 1 shelf and 1 tray

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.207	910	500	986	815	455	34,0	250	160
sw-600.207	1060	600	986	965	555	40,5	250	160
sw-700.242	1060	700	986	965	655	46,5	250	160
sw-800.242	1260	800	986	1165	755	55,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolley with 2 trays

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.208	910	500	986	815	455	37,0	250	160
sw-600.208	1060	600	986	965	555	43,5	250	160
sw-700.243	1060	700	986	965	655	50,5	250	160
sw-800.243	1260	800	986	1165	755	60,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 3 trays

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.209	910	500	986	815	455	43,0	250	160
sw-600.209	1060	600	986	965	555	52,5	250	160
sw-700.244	1060	700	986	965	655	61,5	250	160
sw-800.244	1260	800	986	1165	755	73,5	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolley
Article no. sw-500.208



Shelf trolley
Article no. sw-500.209

Shelf trolleys, high



Shelf trolleys, high

Modular system; Base structure with innovative frame section; Base, shelves and trays of wood-based board, surface finish beech; Tray height for all models 60 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Shelf trolleys with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	mm			
a	b	c	d	e				
sw-500.211	910	500	1524	850	500	44,0	250	160
sw-600.211	1060	600	1524	1000	600	55,0	250	160
sw-700.245	1060	700	1524	1000	700	61,0	250	160
sw-800.245	1260	800	1524	1200	800	74,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.



Also available as ESD version on page 27

Shelf trolley Article no. sw-500.211

Additional Articles for shelf trolleys

Article no.	Dimension			Weight	Load cap.	Wheel diam.	Wheel diam.
	mm	mm	mm				
a	b	c	d	e			
zsw-500.205	845 x 485		850 x 500		6,5	80	Extra shelf
zsw-600.210	995 x 585		1000 x 600		8,5	80	Extra shelf
zsw-700.210	995 x 685		1000 x 700		12,5	80	Extra shelf
zsw-800.210	1195 x 785		1200 x 800		17,0	80	Extra shelf
zsw-500.209	815 x 455 x 45		850 x 500		7,0	80	Extra tray
zsw-600.209	965 x 555 x 45		1000 x 600		9,0	80	Extra tray
zsw-700.209	965 x 655 x 45		1000 x 700		11,0	80	Extra tray
zsw-800.209	1156 x 755 x 45		1200 x 800		15,0	80	Extra tray

Swivel castors with wheel brakes and foot guards for your safety.



Also available as ESD version on page 27

Shelf trolley Article no. sw-500.212



Shelf trolley Article no. sw-500.213



Shelf trolley Article no. sw-500.214

Shelf trolleys with 3 trays

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	mm			
a	b	c	d	e				
sw-500.213	910	500	1524	815	455	47,5	250	160
sw-600.213	1060	600	1524	965	555	57,0	250	160
sw-700.247	1060	700	1524	965	655	66,0	250	160
sw-800.247	1260	800	1524	1165	755	80,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 5 trays

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	mm			
a	b	c	d	e				
sw-500.214	910	500	1524	815	455	60,5	250	160
sw-600.214	1060	600	1524	965	555	74,5	250	160
sw-700.248	1060	700	1524	965	655	87,0	250	160
sw-800.248	1260	800	1524	1165	755	108,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.



Shelf trolleys with sloping shelves

Shelf trolleys with sloping shelves

Modular system; base structure with innovative frame section; Variable shelves of mesh 50 x 50 mm in angle-steel frame or base and shelves of wood-based, edge 15 mm high; for sloping or horizontal insertion; Shelf support interval 120 mm, gradient when sloping 15 degrees; Tubular pushbar welded to one end; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Shelf trolley
Article no. sw-540.224

Shelf trolley
Article no. sw-540.200

Shelf trolley
Article no. sw-540.223



Shelf trolley
Article no. sw-540.226

Shelf trolley
Article no. sw-540.201

Shelf trolley
Article no. sw-540.225



Shelf trolley
Article no. sw-540.218

Shelf trolley
Article no. sw-540.202

Shelf trolley
Article no. sw-540.212

Shelf trolleys with 2 mesh shelves, galvanised

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-540.224	1508	550	1231	1320	537	53,5	250	160
sw-640.224	1758	650	1271	1570	637	61,5	400	200

Shelf trolleys with 2 wood shelves

sw-540.200	1508	550	1231	1320	537	54,5	250	160
sw-640.200	1758	650	1271	1570	637	65,0	400	200

Shelf trolleys with 2 mesh shelves

sw-540.223	1508	550	1231	1320	537	53,5	250	160
sw-640.223	1758	650	1271	1570	637	61,5	400	200

Swivel castors with wheel brakes and foot guards for your safety.

Shelf trolleys with 3 mesh shelves, galvanised

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-540.226	1508	550	1531	1320	537	66,0	250	160
sw-640.226	1758	650	1571	1570	637	76,0	400	200

Shelf trolleys with 3 wood shelves

sw-540.201	1508	550	1531	1320	537	69,0	250	160
sw-640.201	1758	650	1571	1570	637	84,0	400	200

Shelf trolley with 3 mesh shelves

sw-540.225	1508	550	1531	1320	537	66,0	250	160
sw-640.225	1758	650	1571	1570	637	76,0	400	200

Swivel castors with wheel brakes and foot guards for your safety.

Additional Articles for Shelf trolleys

Article no.	Dimension		Weight	Load cap.
	mm	kg		
zsw-540.212	1320 x 537	11,0	50	Extra shelf
zsw-640.212	1570 x 637	12,0	50	Extra shelf

Additional Articles for Shelf trolley, galvanised

zsw-540.218	1320 x 537	11,0	50	Extra shelf
zsw-640.218	1570 x 637	12,0	50	Extra shelf

Additional Articles for shelf trolley

zsw-540.202	1320 x 537	12,5	80	Extra shelf
zsw-640.202	1570 x 637	16,0	80	Extra shelf

Shelf trolleys with 4 mesh shelves, galvanised

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-540.218	1508	550	1811	1320	537	77,0	250	160
sw-640.218	1758	650	1851	1570	637	90,0	400	200

Shelf trolleys with 4 wood shelves

sw-540.202	1508	550	1811	1320	537	84,0	250	160
sw-640.202	1758	650	1851	1570	637	102,5	400	200

Shelf trolleys with 4 mesh shelves

sw-540.212	1508	550	1811	1320	537	77,0	250	160
sw-640.212	1758	650	1851	1570	637	90,0	400	200

Swivel castors with wheel brakes and foot guards for your safety.

Serving trolley / Order-picking trolley




Serving trolley

Welded tubular steel and innovative frame section; One pushbar at each end; glass shelves set in frame; Trolley surface galvanised; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; 4 bolt-hole swivel castors

Serving trolleys with 2 load surfaces

Article No.	Dimensions			Load surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-600.720	960	600	1050	850	600	38	100	100

Base and shelves of glass

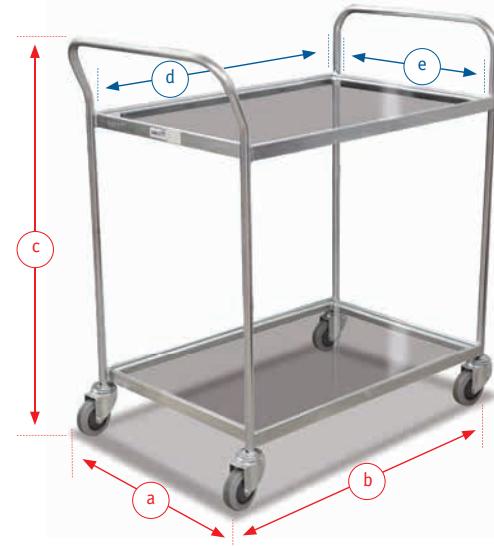

Serving trolley
Article No. sw-600.720

Order-picking trolley with EasySTOP

Modular system; Base structure with innovative frame section; Load surface of plywood panel, screen-printed surface; Removable shelves for variable insertion at 50 mm intervals; capacity per shelf 60 kg; wire-mesh ends 50 x 50 mm; drawbar and coupling; Trolley surface galvanised; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings, thread guard and foot guard, 2 EasySTOP swivel castors and 2 fixed castors.



Information on page 7

Additional parts on option



Steps press down in use



Middle wheel on option:
4 swivel castors combined
with a middle castor and the
trolley turns on spot.



Wire mesh shelf on option:
Shelf support interval 50 mm



Order-picking trolley with 4 load surfaces

Article No.	Dimensions			Load surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-520.100	1030	517	1776	850	500	68	400	160

Base and shelves of plywood, screen-printed surface

Order-picking trolley
Article No. sw-520.100



Document trolleys / Paper transport dollies



Document trolley
Article No. sw-500.380


Document trolley

Welded tubular steel; document compartment enclosed on 3 sides; Load surface inclined at 10° towards back; 1 pushbar at each end; Surface powder-coated RAL 7035 light grey; permanent surface protection; impact and scratch resistant; Four 100 mm thermoplastic swivel castors rubber with wheel brake

Document trolley

Article No.	Dimensions			Load surface			Weight	Load cap.	Wheel diam.
	a	b	c	d	e	f			
sw-500.380	600	525	1025	550	525	420	26	100	100

Load surface inclined at 10° towards back

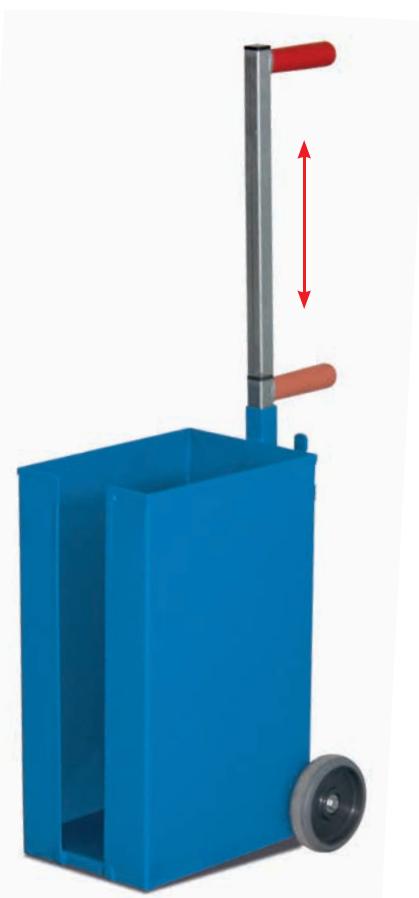

Paper transport dolly
Article No. sw-021.000

Paper transport dolly

Welded tubular steel; pushbar height adjustable; for A4 paper; Rubber-covered pushbar; Surface powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; 2x 125 mm thermoplastic rubber castors with precision deep-groove ball bearings



Paper transport dolly

Article No.	Dimensions			Load surface	Weight	Load cap.	Wheel diam.
	a	b	c				
sw-021.000	210	300	1000	DIN A4	9	50	125

Adjustable-height pushbar

Document trolleys




Document trolley with 20 compartments with EasySTOP

Robust welded steel construction; with 10 compartments at each end; tilt 5°; Central wall with mesh 70 x 70 mm and side walls of perforated sheet; With 2 vertical pushbars (projecting 100 mm); roof; collision guard on base frame (30 x 7 mm); Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors



Information on page 7

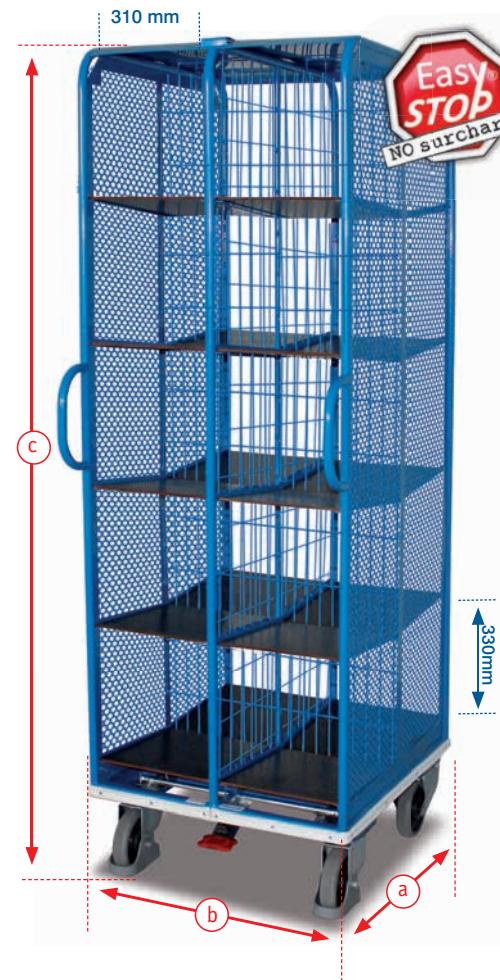

Document trolley with 2 x 10 compartments width of compartment 310 mm

Article no.	Dimension			Loading surface	Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c				
sw-574.002	858	674	2015	2 x 10 compartments	55,5	500	160

EasySTOP swivel castors and foot guards for your safety.

Document trolley with 9 compartments

Robust angle-steel construction; 9 compartments for files; Superstructure and compartments of wood-based board, surface finish beech; Recessed handle at end; base frame surrounded by protective plastic strip; Compartments can be closed by roller shutter with cylinder lock; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guard and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors




Document trolley with 9 compartments lockable

Article no.	Dimension			Loading surface	Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c				
sw-474.000	877	474	1445	9 compartments	68,5	400	160

Swivel castors with wheel brakes and foot guards for your safety.



Document trolley / Book trolley



Document trolley
Article no. sw-700.995

Document trolley with 2 x 6 compartments with EasySTOP

Robust angle-steel construction; 6 compartments on each side; tilt 9°; Superstructure and compartments of waterproof bonded plywood; surface finish screen printed; With 2 top pushbars; base frame with surrounding protective strip of plastic profile; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 **EasySTOP** swivel castors and 2 fixed castors



Information on page 7

Document trolley with 2 x 6 compartments

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	mm						
	a	b	c				
sw-700.995	1105	700	1170	2 x 6 compartments	55,5	400	200

EasySTOP swivel castors and foot guards for your safety.



Book trolley

Welded steel construction; 3 sloping shelves for transport and storage of books; tilt 5°; Vertical distance between shelves 300 mm; 1 pushbar at each end; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres, 4 swivel castors including 2 with wheel brakes

Book trolley with 3 shelves and 5° slope

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-300.000	900	300	890	830	290	26	150	75

Swivel castors with wheel brakes!

Book trolley
Article no. sw-300.000



Trolleys

VARIOfit®

Workshop trolleys





Workshop trolleys

VARIOfit
The perfect form
of transport



Drawer divider dimension inside:

Typ 1 290 x 473 x 98 mm Typ 2 290 x 473 x 160 mm Typ 3 290 x 473 x 135 mm



Workshop trolley with 1 cupboard, 4 drawers and 1 load surface (Drawer divider type 1, 2, 2, 3)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-985.000	1111	600	960	1000	600	63,0	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley with 1 cupboard, 6 drawers and 1 load surface (Drawer divider type 6 x 1)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-985.001	1111	600	960	1000	600	69,0	400	160

EasySTOP swivel castors and foot guards for your safety.


Workshop trolley
Article no. sw-985.001



Additional Articles Pegboard tool panel (for Article on pages 46 - 48)

Article no.	Dimension		Weight kg
	mm	mm	
zsw-100.500	1000 x 588	for workshop trolley, with retaining edge	7,5
zsw-100.501	1000 x 588	for workshop trolley	10,0

Workshop trolley
Article no. zsw-100.500

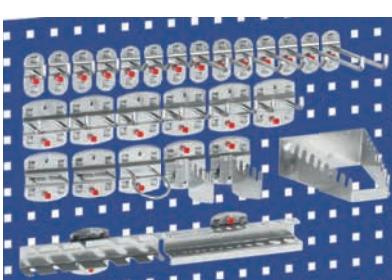

Holder selection 28 parts
Article no. zsw-280.000

Additional Articles - Holder selection

Article no. zsw-280.000	28 parts
6x	Tool holder with rising end
8x	Tool holder with vertical end
6x	Double tool holder
2x	Holder for pliers
1x	Machine holder
1x	Spanner holder
1x	Screwdriver holder
1x	Drill holder
2x	Saw holder

Additional Articles - Holder selection

Article no. zsw-180.000	18 parts
5x	Tool holder with rising end
2x	Tool holder with vertical end
3x	Double tool holder
3x	Tool clamp
2x	Holder for pliers
1x	Drill holder
1x	Spanner holder
1x	Screwdriver holder



Additional Articles - Material crate

Article no.	Size		Color
	mm	mm	
fk-140.000	Material crate	230 x 140 x 130	red
fk-140.001	Material crate	290 x 140 x 130	blue
fk-105.000	Material crate	85 x 105 x 45	green
fk-105.001	Material crate	160 x 105 x 75	yellow



Material crate
Article no. fk-140.000



Workshop trolleys with EasySTOP

Sheet steel construction; Working surface of beech finish plywood; 80 mm high surround on three sides; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Cupboards with 1 fixed and 2 variable shelves; Drawers with sliding runners; with cylinder lock; Carrying capacity 30 kg per cupboard shelf and 25 kg per drawer; Grey non-marking thermoplastic rubber tyres with precision deepgroove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors; Working height 915 mm



Workshop trolley with 1 cupboard, 4 drawers and 1 load surface (Drawer divider type 1, 2, 2, 3)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm	mm	mm	d	e			
a	b	c						
sw-985.002	1123	612	1040	1000	600	69,5	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley with 1 cupboard, 6 drawers and 1 load surface (Drawer divider type 6 x 1)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm	mm	mm	d	e			
a	b	c						
sw-985.003	1123	612	1040	1000	600	75,5	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley Article no. sw-985.002



Workshop trolley Article no. sw-985.003



Drawer divider set Article no. zsw-985.003



Cabinet Article no. sw-500.014



Cabinet Article no. sw-500.015

Cabinet with hinged door and 1 load surface

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm	mm	mm	d	e			
a	b	c						
sw-500.014	575	660	910	551	638	33,5	150	125

EasySTOP swivel castors and foot guards for your safety.

Drawer divider dimension inside:
Typ 4 390 x 535 x 98 mm **Typ 5** 390 x 535 x 157 mm

Cabinet with 4 drawers and 1 load surface (Drawer divider type 3 x 4, 5)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm	mm	mm	d	e			
a	b	c						
sw-500.015	575	660	910	551	638	50,0	150	125

EasySTOP swivel castors and foot guards for your safety.

*similar to figure



Workshop trolleys

VARIOfit
The perfect form
of transport



Workshop trolley
Article no. sw-600.610

Workshop trolleys with EasySTOP

Made of steel section/tubular steel; Working surface of beech finish plywood; 80 mm high surround on three sides; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Cupboards with 1 fixed and 2 variable shelves; Drawers with sliding runners; with cylinder lock; Carrying capacity 30 kg per cupboard shelf and 25 kg per drawer; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors; Usable height 800 mm

Workshop trolley with 1 cupboard and 3 load surfaces

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.610	1218	640	960	1126	628	66,0	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.611

Workshop trolley with 1 cupboard, 1 drawer and 1 load surface

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.611	1218	640	960	1126	628	64,5	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.612

Workshop trolley with 4 drawers and 3 load surfaces (Drawer divider type 3 x 4, 5)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.612	1218	640	960	1126	628	81,5	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.613

Workshop trolley with 1 cupboard, 4 drawers and 1 load surface (Drawer divider type 3 x 4, 5)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.613	1218	640	960	1126	628	93,5	400	160

EasySTOP swivel castors and foot guards for your safety.



Workshop trolleys with EasySTOP

Made of steel section/tubular steel; Working surface of beech finish plywood; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Cupboards with 1 fixed and 2 variable shelves; Drawers with sliding runners; with cylinder lock; Carrying capacity 30 kg per cupboard shelf and 25 kg per drawer; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors

Workshop trolley with 3 load surfaces and 1 cupboard

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-600.603	1130	624	1013	1000	600	61,0	250	125

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.603



Workshop trolley
Article no. sw-600.604

Workshop trolley with 2 cupboards

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-600.604	1130	624	1013	1000	600	73,5	250	125

EasySTOP swivel castors and foot guards for your safety.



Information on page 7

Workshop trolley with 3 load surfaces and 4 drawers (Drawer divider dimension 3 x 4, 5)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-600.605	1130	624	1013	1000	600	76,5	250	125

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.605

Workshop trolley with 1 load surface, 4 drawers and 1 cupboard (Drawer divider type 3 x 4, 5)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-600.606	1130	624	1013	1000	600	89,5	250	125

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.606

Workshop trolley with 1 load surface and 8 drawers (Drawer divider type 6 x 4, 2 x 5)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm				
	a	b	c	d	e			
sw-600.608	1130	624	1013	1000	600	106,5	250	125

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.608



Workshop trolleys

VARIOfit
The perfect form
of transport



Workshop trolley
Article no. sw-600.602

Workshop trolleys with EasySTOP

Made of steel section/tubular steel; Working surface of beech finish plywood; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Cupboards with 1 fixed and 2 variable shelves; Drawers with sliding runners; with cylinder lock; Carrying capacity 30 kg per cupboard shelf and 25 kg per drawer; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors

Workshop trolley with 4 drawers and 2 load surfaces (Drawer divider type 3 x 4, 5)

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.602	1190	600	931	1060	600	80,5	500	200

EasySTOP swivel castors and foot guards for your safety.

Drawer divider dimension inside:

Typ 4 390 x 535 x 98 mm Typ 5 390 x 535 x 157 mm

Workshop trolley with 1 cupboard and 2 load surfaces

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.607	1190	600	931	1060	600	64,5	500	200

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.607



Workshop trolley
Article no. sw-600.698

Workshop trolley with 1 cupboard and 4 drawers (Drawer divider type 3 x 4, 5)

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.698	1190	600	931	1060	600	101,0	500	200

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.619

Workshop trolley with 8 drawers (Drawer divider type 6 x 4, 2 x 5)

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.619	1190	600	931	1060	600	118,0	500	200

EasySTOP swivel castors and foot guards for your safety.



Workshop trolleys with EasySTOP

Made of steel section/tubular steel; Working surface of beech finish plywood; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Cupboards with 1 fixed and 2 variable shelves; Drawers with sliding runners; with cylinder lock; Carrying capacity 30 kg per cupboard shelf and 25 kg per drawer; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors

Workshop trolley with 1 load surface and 1 cupboard with double door and T-handle lock

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.640	1125	624	1100	1000	600	61,0	250	125

EasySTOP swivel castors and foot guards for your safety.



Workshop trolley
Article no. sw-600.640

What is and what makes it so special? Information on page 7

Heavy-duty workshop trolley with EasySTOP

Made of steel section/tubular steel; Load surface of waterproof bonded plywood, surface finish screen printed, anti slip; Front powder-coated RAL 5010 gentian blue; body RAL 7035 light grey; Elastic solid rubber tyres on cast aluminium wheels; ball-bearing hubs; foot guards; 2 EasySTOP swivel castors and 2 fixed castors

Heavy-duty workshop trolleys with 2 load surfaces and 1 cupboard

Article no.	Dimension mm			Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-700.620	1190	700	931	1060	700	73,5	1000	200
sw-800.620	1390	800	931	1260	800	100,0	1000	200

EasySTOP swivel castors and foot guards for your safety.



Heavy-duty workshop trolley
Article no. sw-700.620



Additional Articles

Article no.	Dimension	Weight
zsw-600.604	4,5	kg 2,5

Drawer divider set for products on pages 47 - 50

a 25 mm b 120 mm

Drawer divider set
Article no. zsw-600.604



Table trolleys with pan



Table trolley
Article no. sw-500.510



Table trolley
Article no. sw-500.610



Table trolley
Article no. sw-500.523



Table trolley
Article no. sw-500.698

Table trolleys with pan and EasySTOP

Welded steel construction; Oil-tight pans; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact resistant and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors



Table trolleys with 2 levels, pan sides 40 mm high

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.510	980	500	910	846	496	36,0	400	160
sw-700.510	1135	700	955	996	696	46,5	400	200

EasySTOP swivel castors and foot guards for your safety.



Table trolleys with 3 levels, bolted pans, sides 40 mm high

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.610	980	500	910	846	496	36,0	400	160
sw-700.610	1135	700	955	996	696	46,5	400	200

EasySTOP swivel castors and foot guards for your safety.

What is and what makes it so special? Information on page 7

Table trolleys with 2 levels, bolted pans, sides 40 mm high

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.523	980	500	1060	846	496	36,0	400	160
sw-700.523	1135	700	1105	996	696	46,5	400	200

EasySTOP swivel castors and foot guards for your safety.

Table trolleys with 3 levels, bolted pans, sides 40 mm high

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.698	980	500	1060	846	496	36,0	400	160
sw-700.623	1135	700	1105	996	696	46,5	400	200

EasySTOP swivel castors and foot guards for your safety.



Table trolley with 2 levels, top steel-sheet pan removable, sides 200 mm high, with reinforced edges and 2 handles

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.507	1164	610	1042	983	583	46,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Table trolley
Article no. sw-600.507

Table trolley with 2 levels, bolted pans, sides 25 mm high

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.506	1157	610	830	996	596	36,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Table trolley
Article no. sw-600.506



Table trolley with 2 levels, galvanised grating, mesh size 30 x 30 mm, and drip tray. Top pan 100 mm with conical drain cock "

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-600.505	1125	610	993	997	597	59,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Table trolley
Article no. sw-600.505

VARIOfit®



Tubular-support trolleys

Sheet-material trucks



Sheet-material trucks



VARIOfit®
The perfect form
of transport



Sheet-material trucks

Welded tubular steel construction; sheet-steel platform; Toe plate sloping towards supporting frame, welded to substructure; Tilt 22°; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact-and scratch-resistant; Pneumatic or solid-rubber tyres, plus 2 support rollers; Also available: Version with variable panel retainer; for panel stack max. 200 x 1.500 mm (D/H)

Sheet-material trucks

Article no.	Dimension		Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d			
sk-710.035	P	1260	680	1435	500	200	17,0
sk-710.036	SR	1260	680	1435	500	200	21,5



P = pneumatic tyres, SR = solid-rubber tyres

Sheet-material truck
Article no. sk-710.035

Sheet-material trucks with panel retainer

Article no.	Dimension		Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d			
sk-710.045	P	1260	680	1439	500	200	21,5
sk-710.046	SR	1260	680	1439	500	200	25,5

P = pneumatic tyres, SR = solid-rubber tyres



Sheet-material truck
Article no. sw-710.045



Sheet-material trolleys / Sheet-material stands



Sheet-material trolley
Article no. sw-1282

Additional Articles

Article no.	Height	Length	
	mm	mm	
zsw-1290	300	1200 mm	Tubular-support
zsw-1291	600	1200 mm	
zsw-1292	900	1200 mm	
zsw-1293	300	1600 mm	
zsw-1294	600	1600 mm	
zsw-1295	900	1600 mm	

Feet for Sheet-material stand

gzu-1286 | Ground clearance 100 mm

Sheet-material stand
Article no. zu-1286



Tubular-support trolley
Article no. sw-700.205



Tubular-support
Article no. zsw-700.205

Sheet-material trolleys

Welded steel construction; without tubular supports; 7 alternative positions for inserting tubular supports; clearance between supports 90 mm; Load surface of wood-based board, surface finish beech; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact-resistant and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors; For 1200 kg carrying capacity: elastic tyres on aluminum rim with ballbearing hubs

Sheet-material trolleys without tubular supports

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-1282	TR	1307	800	308	1200	800	41,5	500
sw-1283	ER	1307	800	308	1200	800	46,0	1200
sw-1284	TR	1707	800	308	1600	800	47,5	500
sw-1285	ER	1707	800	308	1600	800	52,5	1200

Swivel castors with wheel brakes and foot guards for your safety

TR = Thermoplastic rubber tyres, ER = Elastic rubber tyres

Sheet-material stands without tubular supports

Description as for sheet-material trolley, but without castors;
One approach roller at end

Sheet-material stand without tubular supports.

Article no.	Dimension			Loading surface		Weight	Load cap.
	a	b	c	d	e		
zu-1286	1307	800	75	1200	800	33,5	1200
zu-1287	1707	800	75	1600	800	39,5	1200



Tubular-support trolleys

Tubular-support trolley

Modular system; Base structure with innovative frame section; Load surface of wood-based board, surface finish beech; incl. 2 tubular supports and 2 rows of sockets for 7 tubular supports; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Tubular-support trolleys

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-700.205	1140	700	1041	1073	640	42,0	500	200
sw-800.205	1340	800	1041	1273	740	48,0	500	200

Swivel castors with wheel brakes and foot guards for your safety.

Additional Articles

Article no.	Weight
zsw-700.205	5,5
zsw-800.205	5,5



VARIOfit®
The perfect form
of transport

Sheet-material trolleys

Welded steel construction; one-sided or two-sided load surface; Sheet supports faced with rubber profile; Load surface tilts to 6°; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact and scratch-resistant; Elastic tyres with ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors.

Sheet-material trolleys, one-sided, base support width 430 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-1305	1380	880	1700	1380	430	57,0	1200	200
sw-1605	1680	880	1700	1680	430	62,0	1200	200
sw-2005	2080	880	1700	2080	430	85,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.



Sheet-material trolley
Article no. sw-1305

Sheet-material trolleys, two-sided, base support width 2 x 270 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
sw-1306	1380	880	1700	1380	2 x 270	71,0	1200	200
sw-1606	1680	880	1700	1680	2 x 270	78,0	1200	200
sw-2006	2080	880	1700	2080	2 x 270	98,0	1200	200

Swivel castors with wheel brakes and foot guards for your safety.



Sheet-material trolley
Article no. sw-1306

Sheet-material trolleys

Welded steel construction; load surface of plywood, tilts to 5°; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors; Also available with rhombic layout

Sheet-material trolley with board load surface, side-frame height 930 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
pl-150.010	1500	680	1200	1500	370	48,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Sheet-material trolley
Article no. pl-150.010

Sheet-material trolley with board load surface, side-frame height 930 mm, rhombic wheel layout

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d	e			
pl-150.011	1500	680	1200	1500	370	48,5	500	200

Swivel castors with wheel brakes and foot guards for your safety.



Sheet-material trolley
Article no. pl-150.011



Workpiece trolleys

Workpiece trolley

Modular system; Base structure with innovative frame section; Load surface of wood-based board, surface finish beech; Superstructure made of angle steel with welded mesh 75 x 75 mm; Slope of grid 8%; height of superstructure 1265 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; Thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Workpiece trolley
Article no. sw-800.801



Workpiece trolley
Article no. sw-800.800

Workpiece trolley without top shelf

Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	b	c			
sw-800.800	1370	800	1553	90,5	500	200

Workpiece trolley with top shelf, 1174 x 264 mm (W/D)

sw-800.801	1370	800	1578	98,0	500	200
------------	------	-----	------	------	-----	-----

Swivel castors with wheel brakes and foot guards for your safety.



Thorn bracket
Article no. zsw-800.800

Additional Articles | Thorn bracket

Article no.	Dimension			Weight	Load cap.
	mm	kg	kg		
zsw-800.800	10 diam. x 200	0,30	10		
zsw-800.801	10 diam. x 300	0,40	10		



Pipe carrier
Article no. zsw-800.802

Additional Articles | Pipe carrier

Article no.	Dimension			Weight	Load cap.
	mm	kg	kg		
zsw-800.802	16 diam. x 300	0,35	15		
zsw-800.803	22 diam. x 300	0,45	25		
zsw-800.804	27 diam. x 300	0,55	25		



Corrugated bracket
Article no. zsw-800.805

Additional Articles | Corrugated bracket

Article no.	Dimension			Weight	Load cap.
	mm	kg	kg		
zsw-800.805	320	0,80	25		



Forked bracket
Article no. zsw-800.806

Additional Articles | Forked bracket

Article no.	Dimension			Weight	Load cap.
	mm	kg	kg		
zsw-800.806	50 LW x 300	0,75	25		



Material box
Article no. zsw-800.807

Additional Articles | Material box

Article no.	Dimension			Weight	Load cap.
	mm	kg	kg		
zsw-800.807	250 x 150 x 80	1,50	25		
zsw-800.808	1200 x 250 x 40	4,50	50		



Material crate
Article no. fk-140.000

For more material crate variants and sizes, see page 46

Additional Articles - material crate

Article no.	Size			Color
	mm			
fk-140.000	material crate	230 x 140 x 130		red

Order-picking trolleys



Order-picking trolleys


Welded steel construction; Panels of wood-based board; surface finish beech; load surface edge 15 mm high; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant. Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

Order-picking trolley with 2 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.614	1320	600	1135	990	590	46,0	250	125

shelf heights 190/820mm
height of top step 515mm
step height 235mm

Swivel castors with wheel brakes and foot guards for your safety.

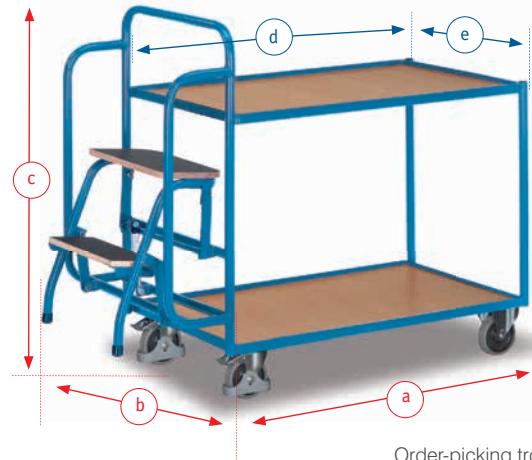

Order-picking trolley
Article no. sw-600.614

VARIOfit®
The perfect form
of transport

Order-picking trolley with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.615	1320	600	1135	990	590	57,0	250	125

shelf heights 190/505/820 mm
height of top step 515mm
step height 235mm

Swivel castors with wheel brakes and foot guards for your safety.



Order-picking trolley
Article no. sw-600.615

Order-picking trolley with 3 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.616	1600	600	1900	990	590	71,0	250	160

shelf heights 240/860/1480 mm
height of top step 935 mm
step height 235 mm

Swivel castors with wheel brakes and foot guards for your safety.



Order-picking trolley
Article no. sw-600.616

Order-picking trolley with 4 shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-600.617	1600	600	1900	990	590	83,0	250	160

shelf heights 240/715/1190/1665mm
height of top step 935mm
step height 230mm

Swivel castors with wheel brakes and foot guards for your safety.



Order-picking trolley
Article no. sw-600.617



Carrier spar trolleys

Carrier spar trolleys

Welded tubular steel construction; 8 or 12 carrier spars per side; Width of trolley continuously adjustable; Height of carrier spars continuously adjustable; Scale for adjusting arrangement of carrier spars; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratchresistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 4 swivel castors and 2 with wheel brakes

Carrier-spar trolleys, one-sided, with 2 uprights

Article no.		Dimension			Weight kg	Load cap. kg	Wheel diam. mm
		a	b	c			
sw-130.006	one-sided	440-1300	800	1800	52,0	400	160
sw-160.006	one-sided	440-1600	800	1800	53,5	400	160

Swivel castors with wheel brakes and foot guards for your safety.



Carrier spar trolley
Article no. sw-130.006



Carrier-spar trolleys, two-sided, with 2 uprights

Article no.		Dimension			Weight kg	Load cap. kg	Wheel diam. mm
		a	b	c			
sw-130.007	two-sided	440-1300	832	1800	63,0	400	160
sw-160.007	two-sided	560-1600	832	1800	65,0	400	160

Swivel castors with wheel brakes and foot guards for your safety.

Additional Carrier-spar

Article no.	Dimension	Load cap.
-------------	-----------	-----------

Carrier-spar length 596 mm

	mm		kg
zsw-596.000	596mm x 3/4"	Carrier-spar	20
zsw-596.001	596mm x 3/4"	Carrier-spar with shrink hose	20
zsw-596.002	1mm	Shrink hose	-
zsw-596.003	596mm x 3/4"	Carrier-spar with slip off safety	20
zsw-070.000	Ø 70 mm	Slip off safety	-
zsw- 596.004	596mm x 3/4"	Carrier-spar with shrink hose and anti-roll devices	20

Carrier-spar length 376 mm

	mm		kg
zsw-376.000	376mm x 3/4"	Carrier-spar	20
zsw-376.001	376mm x 3/4"	Carrier-spar with shrink hose	20
zsw-376.002	1mm	Shrink hose	-
zsw-376.003	376mm x 3/4"	Carrier-spar with slip off safety	20
zsw-070.000	Ø 70 mm	Slip off safety	-
zsw-376.004	376mm x 3/4"	Carrier-spar with shrink hose and anti-roll devices	20



Carrier spar trolley
Article no. sw-210.006

Carrier-spar trolleys, one-sided, with 3 uprights

Article no.		Dimension			Weight kg	Load cap. kg	Wheel diam. mm
		a	b	c			
sw-210.006	one-sided	560-2100	800	1800	66,0	400	160
sw-310.006	one-sided	560-3100	800	1800	71,5	400	160

Swivel castors with wheel brakes and foot guards for your safety.



Carrier spar trolley
Article no. sw-310.007

Carrier-spar trolleys, two-sided, with 3 uprights

Article no.		Dimension			Weight kg	Load cap. kg	Wheel diam. mm
		a	b	c			
sw-210.007	two-sided	560-2100	832	1800	83,0	400	160
sw-310.007	two-sided	560-3100	832	1800	89,0	400	160

Swivel castors with wheel brakes and foot guards for your safety.

Euro container trolleys



Euro container trolleys

Welded steel construction; Tilts to 17° or 32°; Shelves open or of wood-based board, surface finish beech; edge 10 mm high; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guards; 4 swivel castors with foot guards 2 with wheel brakes; Shelf heights: 265, 545, 845 mm

Floors tiltable


Euro container trolley, 3 open shelves, Loading surface 410 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm			mm	mm			
	a	b	c	d	e			
sw-610.100	520	665	1125	410	604	32,5	200	125

Euro container trolley, 3 open shelves, Loading surface 825 mm

Article no.	Dimension	Loading surface	Weight	Load cap.	Wheel diam.			
sw-610.200	935	665	1125	825	604	38,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.

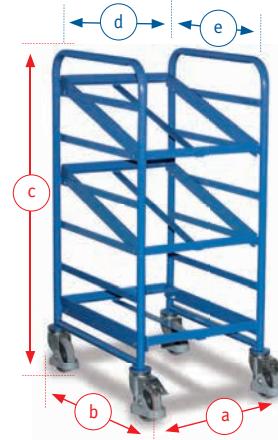

Euro container trolley
Article no. sw-610.200

Euro container trolley
Article no. sw-610.100

Euro container trolley, 3 plastic crate (600 x 400 x 170 mm 35 liter), Loading surface 410 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm			mm	mm			
	a	b	c	d	e			
sw-610.102	520	665	1125	410	604	37,0	200	125

Euro container trolley, 6 plastic crate (600 x 400 x 170 mm, 35 liter), Loading surface 825 mm

Article no.	Dimension	Loading surface	Weight	Load cap.	Wheel diam.			
sw-610.202	935	665	1125	825	604	47,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.



Euro container trolley
Article no. sw-610.202

Euro container trolley
Article no. sw-610.102

Euro container trolley, 3 wooden shelves, Loading surface 410 mm

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm			mm	mm			
	a	b	c	d	e			
sw-610.101	520	665	1125	410	604	40,0	200	125

Euro container trolley, wooden shelves, Loading surface 825 mm

Article no.	Dimension	Loading surface	Weight	Load cap.	Wheel diam.			
sw-610.201	935	665	1125	825	604	52,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.



Euro container trolley
Article no. sw-610.201

Euro container trolley
Article no. sw-610.101



Euro container trolleys

VARIOfit
The perfect form
of transport



Euro container trolley
Article no. sw-610.300

Euro container trolleys

Welded steel construction; Tilts to 17° or 32°; Shelves open or of wood-based board, surface finish beech, edge 10 mm high; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread guards; 4 swivel castors with foot guards, 2 with wheel brakes; Shelf heights: 300, 600, 900, 1200, 1500 mm

Floors tiltable

Euro container trolley, 5 open shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-610.300	1350	665	1695	1240	604	70,5	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Additional Articles

Article no.	Dimension			Load cap.	
	mm			l	
fk-040.004	600 x 400 x 170			plastic crate	35
fk-040.000	600 x 400 x 220			plastic crate	45

Euro container trolley, 15 plastic crate 600 x 400 x 170 mm, 35 liter

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-610.302	1350	665	1695	1240	604	93,0	250	160

Swivel castors with wheel brakes and foot guards for your safety.



Euro container trolley
Article no. sw-610.302



Euro container trolley
Article no. sw-610.301

Euro container trolley, 5 wooden shelves

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-610.301	1350	665	1695	1240	604	106,5	250	160

Swivel castors with wheel brakes and foot guards for your safety.

Small order-picking trolleys



Small order-picking trolleys

Welded steel construction; Open shelves or of wood-based board, surface finish beech, edge 10 mm high; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 EasySTOP swivel castors and 2 fixed castors; Shelf heights: 210, 675, 1140 mm; Carrying capacity, upper and middle shelves: 50 kg

Small order-picking trolley, 3 wooden shelves

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.801	818	455	1150	612	412	28,0	200	125

EasySTOP swivel castors and foot guards for your safety.



Small order-picking trolley Article no. sw-400.801

What is and what makes it so special? Information on page 7

Small order-picking trolley, 3 plastic crate (600 x 400 x 220 mm, 45 liter)

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.804	818	455	1332	612	412	26,5	200	125

EasySTOP swivel castors and foot guards for your safety.



Small order-picking trolley Article no. sw-400.804

Small order-picking trolley, 3 open shelves

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.800	818	455	1150	612	412	22,5	200	125

EasySTOP swivel castors and foot guards for your safety.

Plastic crate on page 62

Small order-picking trolley, 3 wooden sloping shelves, tilts to 15° or 30°

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.803	818	455	1160	612	412	30,5	200	125

EasySTOP swivel castors and foot guards for your safety.



Small order-picking trolley Article no. sw-400.803

Small order-picking trolley, 3 plastic crate (600 x 400 x 220 mm, 45 liter), tilts to 15° or 30°

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.805	818	455	1342	612	412	29,0	200	125

EasySTOP swivel castors and foot guards for your safety.



Small order-picking trolley Article no. sw-400.805

Small order-picking trolley, 3 open sloping shelves, tilttable, tilts to 15° or 30°

Article no.	Dimension		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm				
sw-400.802	818	455	1160	612	412	23,5	200	125

EasySTOP swivel castors and foot guards for your safety.



Small order-picking trolley Article no. sw-400.802

Material stands



Material stand
Article no. sw-405.000



Material stands

Welded steel construction; Load surface with 20 mm high edge on one or all sides; height adjustment range 500-770, 720-970 or 750-1100 mm in steps of 25 mm; Secure positioning by spring catch; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratchresistant; Solid-rubber wheels 75 mm, 4 swivel castors including 2 with wheel brakes.

Material stand, height adjustment range 720 - 970 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-405.000	610	410	720-970	606	406	18,5	150	75

Swivel castors with wheel brakes!

Material stand, height adjustment range 500 - 770 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-405.001	610	410	500-770	606	406	18,0	150	75

Swivel castors with wheel brakes!

Material stand, height adjustment range 750 - 1100 mm, tilts to 15° and 30°

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-405.002	600	410	750-1100	510	408	18,0	150	75

Swivel castors with wheel brakes!

Material stand, height adjustment range 500 - 770 mm, tilts to 15° and 30°

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-405.005	600	410	500-770	510	408	16,5	150	75

Swivel castors with wheel brakes!

Material stands with hand crank

Welded steel construction; Load surface with edge on one side, 20 mm high; Platform bolted to frame, permitting variable extension with other types of platform; Zero-play adjustable telescopic system, self-locking; continuously adjustable by hand crank; Platform height adjustable even under full load; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact and scratch resistant; Solid-rubber wheels 75 mm, 4 swivel castors including 2 with wheel brakes



Adjustment
of tolerance
with a screw




Platform is screwed on the
basis, therefore variable
adjustable with other types of
platform. Tilts to 15° and 30°.

Material stand with hand crank 655 - 1045 mm, sloping 15° and 30°

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-405.012	600	410	655-1045	510	405	22,5	150	75

Swivel castors with wheel brakes!

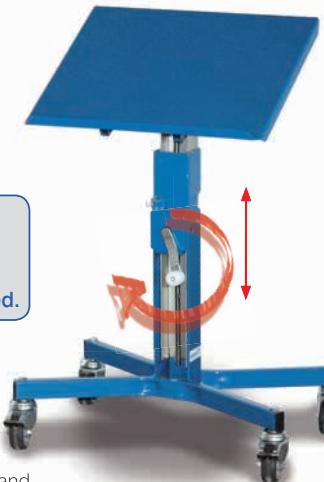

Continuously,
easy and precise
adjustment of
working height
even if fully loaded.

Material stand
Article no. sw-405.012

Table transporter



Table transporter

For ergonomic shifting and transport of tables up to a length of ca. 1700 mm; Cuts working time by at least half! For diagonal and length wise transport; Depth of immersion: max. 850 mm under the table; Underclearance of table: min. 635 mm

Saves min. 50 % work!



Table transporter

Article No.	Dimensions			Load cap.		Weight kg	Load cap. kg	Wheel diam. mm	
	a mm	b mm	c mm	d mm	e mm				
sw-490.001	1200	490	828	375	375	18	100	125	
	a ¹	b ²	c ³						
	870	490	860	Measurements with pushbar folded.					

Table transporter
Article No. sw-490.001



Push-handle dollies

Welded steel construction; Tubular steel load surface or load surface of woodbased board, surface finish beech; Screw-on handles; Dolly powder-coated RAL 5010 gentian blue; permanent surface protection; impact-resistant and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 1 or 2 swivel castors with wheel brakes and 2 fixed castors

Push-handle dolly
Article no. sw-500.801



Push-handle dolly with tubular steel load surface

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.801	874	500	877	603	500	11,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-500.800



Push-handle dolly with board load surface

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-500.800	874	500	877	603	500	11,5	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-450.805

Push-handle dolly with tubular steel load surface

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.805	784	450	878	567	450	9,0	150	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-450.804

Push-handle dolly with board load surface

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.804	784	450	878	567	450	9,0	150	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-450.800



Push-handle dolly with 2 board load surfaces, heights 185 / 770 mm

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.800	891	450	883	603	450	16,0	200	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-450.807

Push-handle dolly, open

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.807	892	420	875	614	414	10,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Push-handle dolly
Article no. sw-450.806

Push-handle dolly with plastic crate (600 x 400 x 220 mm, 45 liter)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-450.806	892	420	875	614	414	12,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

System dollies




System dollies

Welded angle-steel construction; Versions with or without load surface of wood-based board, surface finish beech; For Euro size container 600 x 400 mm; Dolly without load surface for Euro size container 600 x 400 mm; Dolly powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 4 swivel castors including 2 with wheel brakes

Euro dolly

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-410.003	620	420	195	614	414	8,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

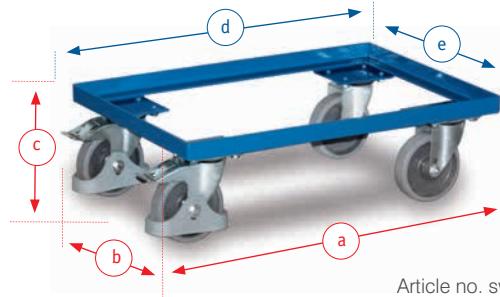

Euro dolly
Article no. sw-410.003

Euro system dolly

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-410.000	677	416	203	604	410	8,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.



Euro system dolly
Article no. sw-410.000



Euro dolly
Article no. sw-410.009
Euro dolly
Article no. sw-410.010



Euro system dolly
Article no. sw-410.002
Euro system dolly
Article no. sw-410.001



Euro system dolly
Article no. sw-410.039
Euro system dolly
Article no. sw-410.011



Euro system dolly
Article no. sw-410.501
Euro system dolly
Article no. sw-410.500

Euro system dolly with load surface of wood-based board, top flush with frame

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-410.001	677	416	203	604	410	11,0	250	125

Swivel castors with wheel brakes and foot guards for your safety.

Euro system dolly with pushbar, base with 10 mm edge

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-410.011	742	416	969	604	410	13,5	250	125

Euro system dolly with pushbar, plate flush with frame

sw-410.039	742	416	969	604	410	13,5	250	125
Swivel castors with wheel brakes and foot guards for your safety.								

ESD version also available,
see page 27

Euro system dolly with 2 load surfaces and 10 mm edge

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	mm			
	a	b	c	d	e			
sw-410.500	677	416	637	604	410	20,0	250	125

Euro system dolly with 2 load surfaces

sw-410.501	677	416	637	604	410	20,0	250	125
Swivel castors with wheel brakes and foot guards for your safety.								



Crate dollies



Crate dolly
Article no. sw.500.010

Crate dollies

Welded angle-steel construction; Dolly powder-coated RAL 5010 gentian blue; permanent surface protection; impact-and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 4 swivel castors including 2 with wheel brakes

Crate dolly with open frame

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-500.010	500	500	169	500	500	9,0	400	125

Swivel castors with wheel brakes and foot guards for your safety.



Crate dolly
Article no. sw-500.011

Crate dolly with board load surface

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-500.011	500	500	185	500	500	12,0	400	125

Swivel castors with wheel brakes and foot guards for your safety.



Crate dolly
Article no. sw-500.013

Crate dolly with ribbed rubber covering

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-500.013	500	500	185	500	500	12,5	400	125

Swivel castors with wheel brakes and foot guards for your safety.



Crate dolly
Article no. sw-500.012

Crate dolly with diamond-tread load surface

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm	d mm	e mm			
sw-500.012	500	500	169	500	500	13,0	400	125


Swivel castors with wheel brakes and foot guards for your safety.

Long-goods trolleys / dolly



Long-goods trolley

Welded angled-steel construction; with push-fit tubular steel stanchions; 2 material recesses; centre free for loading by crane or stacker truck; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact-and scratch-resistant; 2 centre wheels of elastic solid rubber or polyurethane wheels 360 x 60 mm; plus 1 swivel castor at each end with wheel brake, diameter 200 x 50 mm; loading height 420 mm; useful height of stanchions 600 mm; total length 720 mm; clear width 600 mm

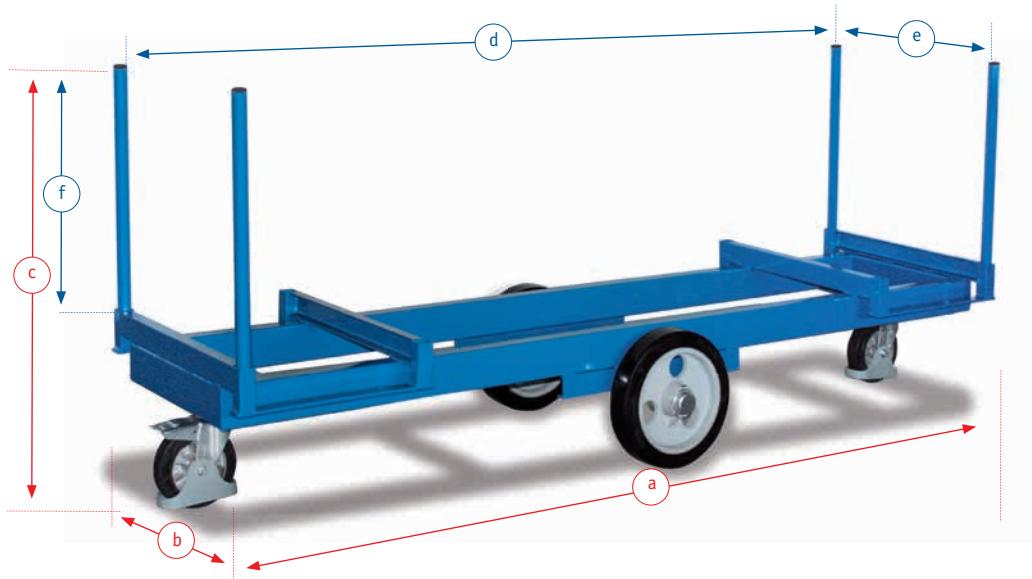

Long-goods trolley
Article no. sw-2500

Long-goods trolley with 4 stanchions. Total length 720 mm, clear width 600 mm

Article no.	Dimension			Loading surface		Fill height	Weight	Load cap.	Wheel diam.
		mm	mm	mm	mm				
sw-2500	ER	2500	720	1020	2500	600	600	115,0	2000
sw-2501	PO	2500	720	1020	2500	600	600	123,0	3000

Swivel castors with wheel brakes and foot guards for your safety.

ER = Elastic-solid-rubber wheels, PO = Polyurethane wheels



Elastic-solid-rubber wheels



Polyurethane wheels

[Info page 8](#)

Long-goods dolly

Welded angle-steel construction; with push-fit tubular steel stanchions, length 500 mm; waterproof bonded plywood platform, surface finish screen printed; loading height 330 mm; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Elastic solid-rubber wheels 200 x 50 mm; ballbearing hubs, 4 swivel castors including 2 with wheel brake and foot guard



Long-goods (1pc.) dolly with waterproof platform and 4 stanchions, usable height 500 mm

Article no.	Dimension			Loading surface		Fill height	Weight	Load cap.	Wheel diam.					
		mm	mm	mm	mm									
sw-700.710	a	700	b	700	c	739	d	627	e	f	410	50	1200	200 x 50

Swivel castors with wheel brakes and foot guards for your safety.

Long-goods dolly
Article no. sw-700.710

VARIOfit®



Trucks

Tyrehandling





Tyre trucks

Tyre trucks

Tyre truck for tyre diameter 540 - 820 mm; with wheel protection guards; Makes it easy to pick up, transport and set down whole stacks of tyres; Pneumatic or solid-rubber tyres on pressed-steel wheels with plastic wheel cap; Rolls very easily and quietly thanks to maintenance-free precision deep-groove ball bearings with dust seals. Galvanised versions of all tyre trucks are also available

Tyre trucks high

Article no.	Dimension			Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm			
sk-710.300	P	745	760	1600	22,0	200
sk-710.301	SR	745	760	1600	25,5	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres


Tyre trucks low

Article no.	Dimension			Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm			
sk-710.302	P	745	610	1164	19,0	200
sk-710.303	SR	745	610	1164	23,0	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres

- Large pushbar with soft plastic grip cover for easy manoeuvring
- Lever system with gas pressure springs for stay-open and clamping functions
- Robust pickup arms
- All parts easy to fit
- Centre of gravity is very close to the axle, thus ensuring easy tilting
- 1 non-slip pedal each on axle and supporting wheel (only on trucks with supporting wheels)

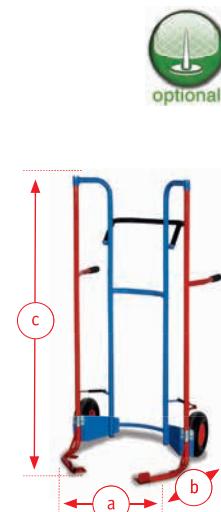

Tyre truck Article no. sk-710.300



Info Page 11, 77

Tyre truck low Article no. sk-710.302



Tyre truck Article no. sk-710.302



Tyre truck Article no. sk-710.312



Tyre truck Article no. sk-710.310



1 non-slip pedal each on axle and supporting wheel (only on trucks with supporting wheels)

- 1. step = 1300 mm
- 2. step = 1600 mm
- 3. step = 1750 mm
- 4. step = 1900 mm

Tyre trucks with telescopic extension for up to 8 wheels (245 mm wide)

Article no.	Dimension			Weight kg	Load cap. kg	Wheel diam. mm
	a mm	b mm	c mm			
sk-710.306	P	745	760	1300 - 1900	27,0	200
sk-710.307	SR	745	760	1300 - 1900	31,0	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tyre truck Article no. sk-710.306



Tyre rack / Tyre trolley

the base ...

Tyre rack / Tyre trolley

Welded tubular steel; Galvanised connecting tubes; boltmounted; hence variable width – prices on request; Rack is suitable for wheel diameters of 540 - 820 mm; rack powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; also available as galvanised version



Tyre trolley the base
Article no. sw-646.003




Tyre rack the base
Article no. sw-646.004

Tyre racks and tyre trolley, the base (4x up to 275 mm wheel per shelf)

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	mm	mm	mm	mm	mm			
sw-646.003	a 1350	b 790	c 1430	d 1130	e 646	33,5	300	125
sw-646.004	1350	790	1360	1130	646	31,0	300	/

Swivel castors with wheel brakes and foot guards for your safety.

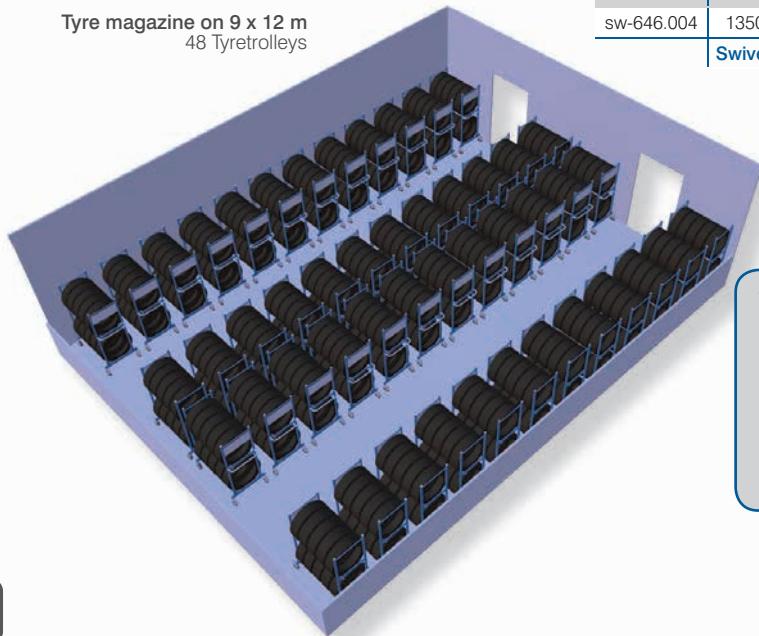

optional:

- Possibility of mounting 4 connecting tubes between 2 tyre racks (make 3 out of 2)
- Level tubes for useful length = 940 mm (4x up to 275 mm wheel per shelf)
- Level tubes for useful length = 1880 mm (8x up to 275 mm wheel per shelf)

Additional Articles



Shelf for Tyre rack and Tyre trolley

Article no.	Dimension			Loading surface	Weight	Load cap.
	mm	mm	mm			
gsw-646.003	a 1225	b 646	c 704	d 1130	e 646	15,0 250



Distance pieces

Putting the galvanized distance pieces in the tubes of the tyre truck/rack you can store wheels with diametre up to 820 mm instead of 650 mm in the second level even if a further level is installed; To adjust the height 4 pieces are needed



Distance pieces for tyre truck and tyre rack

Article no.	Dimension		Weight
	Piece	mm	
zsw-646.009	1	a 160	0,4



Distance pieces
Article no. zsw-646.009

Push-and-pull bar, movable

Article no.	Dimension		Weight
	mm	kg	
zsw-646.004	370	1,5	



Push-and-pull bar
Article no. zsw-646.004

Plastic clips for tyre truck / rack, set of 8

Article no.	Dimension			Weight
	mm	Piece	kg	
zsw-646.005	Ø 33,7	4	c 670 mm for lower pipes of the tyre truck	0,5
		2	300 mm for right pipes of the tyre truck	
		2	270 mm for left pipes of the tyre truck (clipboard)	




Plastic clips
Article no. zsw-646.005

Plastic clips for Shelfe / rack, set of 8

Article no.	Dimension			Weight
	mm	Piece	kg	
zsw-646.006	Ø 33,7	4	c 275 mm for pipes of the upper level	0,3
		4	260 mm for pipes of the lower level	



Plastic clips
Article no. zsw-646.006



Extension tube for joining two tyre trolley / tyre racks

Article no.	Dimension				Weight
	mm	Piece	mm	mm	
zsw-646.008	Ø 26,9	1	a 1220	d 1130	1,5

2 pieces extension tubes are required to adjust a further level



Extension tube
Article no. zsw-646.008

Feet for tyre stand

Article no.	Dimension		Load cap.	Weight
	mm	kg		
zsw-646.007	c 70	300	0,3	



Feet for tyre stand
Article no. zsw-646.007



Aluminium and tubular-steel trucks with puncture-proof wheels



Puncture-proof wheels

Aluminium or tubular-steel truck with puncture-proof tyres of heavy-duty cushion rubber, a more comfortable and more profitable alternative to pneumatic tyres. The puncture-proof tyres cushion shocks, absorb vibrations and have excellent directional stability. No more tedious checking of tyre pressures, no worries about nails, glass or kerbstones. On pressed-steel wheels with precision deep-groove ball bearings and wheel cap, they are the ideal tyres for heavy loads and day-to-day use. Lasting up to 5 times longer, they offer greater cost-effectiveness combined with greater operational reliability

Tubular-steel truck

Article no.	Dimension			Toe plate	Weight Load cap.	Wheel diam.		
	mm	mm	mm					
a	b	c	d	e	kg	kg	mm	
sk-710.014	570	605	1305	320	250	19,0	250	260×85

Steel-rim wheels with precision deep-groove ball bearings



Safety handles

using improved materials; their flexibility reduces the risk of breakage and ensures optimum user safety



Puncture-proof wheels are available for all trucks identified by this button.

Article no.

rsa-260.005



Precision deep-groove ball bearings

sealed, maintenance-free precision deep-groove ball bearings. Guaranteed easy running when loaded, even on sloping or rough surfaces



Plastic skids

Specially developed by VARIOfit®, provide optimum safety. They continue past the bend in the tube to ensure there is no chance of catching or jamming

Aluminiumtruck

Article no.	Dimension			Toe plate	Weight Load cap.	Wheel diam.		
	mm	mm	mm					
a	b	c	d	e	kg	kg	mm	
ap-710.214	570	605	1305	320	250	12,5	200	260×85

Steel-rim wheels with precision deep-groove ball bearings

Tubular-steel trucks



Tubular-steel trucks

Welded steel construction; with safety handles; Toe of sheet steel; plastic skids are replaceable and mounted completely on the tube; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres on steel wheels with precision deep-groove ball bearings and plastic wheel cap

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sk-710.020	P	614	455	1100	400	150	14,0	250	260×85
sk-710.021	SR	614	455	1100	400	150	17,5	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-710.021

Tubular-steel truck
Article no. sk-710.020

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sk-710.015	P	570	531	1100	320	250	13,0	200	260×85
sk-710.016	SR	570	531	1100	320	250	17,0	200	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-710.015

Tubular-steel trucks with support wheel

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sk-710.055	P	570	586	1305	320	250	21,5	250	260×85
sk-710.065	SR	570	586	1305	320	250	24,5	250	250×60



Tubular-steel truck
Article no. sk-710.010

Tubular-steel truck
Article no. sk-710.055

Tubular-steel trucks with plastic skids

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sk-710.005	P	570	605	1305	320	250	18,0	250	260×85
sk-710.006	SR	570	605	1305	320	250	22,0	250	250×60



Tubular-steel truck
Article no. sk-710.005

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sk-710.030	P	550	738	1600	300	260	19,5	250	260×85
sk-710.031	SR	550	738	1600	300	260	23,5	250	250×60



Tubular-steel truck
Article no. sk-710.030

The perfect form
of transport
VARIOfit®



Tubular-steel trucks



Tubular-steel truck
Article no. sk-710.205

For additional carrying bars for all
trucks on pages 76 to 84, see page 84

Tubular-steel trucks with large toe

Article no.	Dimension					Toe plate	Weight	Load cap.	Wheel diam.
	a	b	c	d	e				
sk-710.205	P	685	600	1110	480	300	18,0	250	260×85
sk-710.206	SR	685	600	1110	480	300	22,0	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-710.217



Tubular-steel truck
Article no. sk-710.207



Tubular-steel truck
Article no. sk-710.203

Tubular-steel trucks with large toe

Article no.	Dimension					Toe plate	Weight	Load cap.	Wheel diam.
	a	b	c	d	e				
sk-710.207	P	685	702	1185	480	300	21,5	250	260×85
sk-710.208	SR	685	702	1185	480	300	25,0	250	250×60
sk-710.117	P	685	552	1185	480	147	21,0	250	260×85
sk-710.118	SR	685	552	1185	480	147	24,5	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Safety handles

using improved materials; their flexibility reduces the risk of breakage and ensures optimum user safety

Tubular-steel trucks with large toe

Article no.	Dimension					Toe plate	Weight	Load cap.	Wheel diam.
	a	b	c	d	e				
sk-710.203	P	570	636	1305	480	300	19,5	250	260×85
sk-710.204	SR	570	636	1305	480	300	23,5	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Plastic skids

Specially developed by VARIOfit® provide optimum safety. They continue past the bend in the tube to ensure there is no chance of catching or jamming on steps.

Tubular-steel trucks with large toe and plastic skids

Article no.	Dimension					Toe plate	Weight	Load cap.	Wheel diam.
	a	b	c	d	e				
sk-710.201	P	570	657	1305	480	300	19,5	250	260×85
sk-710.202	SR	570	657	1305	480	300	23,5	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-710.201

Aluminium trucks



Aluminium trucks

Welded aluminium construction; with aluminium toe; safety handles; plastic skids are replaceable and mounted completely on the tube; Pneumatic or solid-rubber tyres on steel wheels with ball bearings and plastic wheel cap

Aluminium trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.015	P	570	531	1100	320	250	8,5	150
ap-710.016	SR	570	531	1100	320	250	12,5	150

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium truck
Article no. ap-710.015

Pneumatic tyres with groove profile for all trucks

- moves 30% easier
- groove profile absorbs less dirt
- low noise moving profile



Aluminium truck
Article no. ap-710.010



Aluminium truck
Article no. ap-710.005

Aluminium trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.010	P	570	586	1305	320	250	11,0	200
ap-710.011	SR	570	586	1305	320	250	14,5	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium trucks with plastic skids

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.005	P	570	605	1305	320	250	11,5	200
ap-710.006	SR	570	605	1305	320	250	14,0	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium trucks



Aluminium truck
Article no. ap-710.103

Aluminium trucks

Welded aluminium construction; with aluminium toe; safety handles; plastic skids are replaceable and mounted completely on the tube; Pneumatic or solid-rubber tyres on steel wheels with ball bearings and plastic wheel cap



Aluminium truck
Article no. ap-710.205

Aluminium trucks with large toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.103	P	570	636	1305	480	300	11,5	200
ap-710.202	SR	570	636	1305	480	300	15,5	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Safety handles

using improved materials; their flexibility reduces the risk of breakage and ensures optimum user safety



Aluminium truck
Article no. ap-710.107

Aluminium trucks with large toe plate and plastic skids

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.107	P	570	657	1305	480	300	12,5	200
ap-710.204	SR	570	657	1305	480	300	16,5	200

Steel-rim wheels with precision deep-groove ball bearings



P = pneumatic tyres, SR = solid-rubber tyres

Aluminium and tubular-steel trucks with folding toe



Aluminium and tubular-steel trucks with folding toe

Robust welded construction; with safety handles; Folding toe; plastic skids are replaceable and mounted completely on the tube; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratchresistant; or as aluminium version; Pneumatic or solid-rubber tyres on pressed-steel wheels with ball bearings and plastic wheel cap

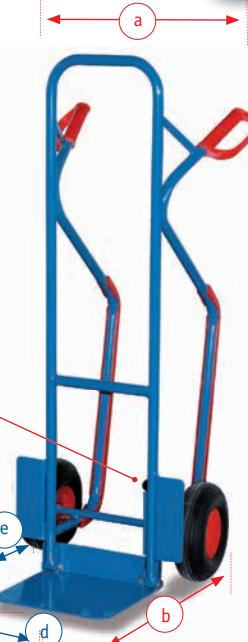

Tubular-steel truck
Article no. sk-710.217

Tubular-steel trucks with folding toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sk-710.217	P	570	610	1300	320	255	18,5	200
sk-710.218	SR	570	610	1300	320	255	22,0	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-710.215

Tubular-steel trucks with folding toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sk-710.215	P	570	525	1300	320	255	18,0	250
sk-710.216	SR	570	525	1300	320	255	21,5	250

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium trucks with folding toe plate with plastic skids

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.211	P	570	640	1305	380	280	13,5	200
ap-710.212	SR	570	640	1305	380	280	17,0	200

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres

Aluminium truck
Article no. ap-710.211



Chair trucks / chair support / wide tubular-steel trucks

NEW



Aluminium Chair truck
Article no. sk-710.058



Chair truck
Article no. sk-710.028

Chair trucks

chair support with antislip covering; removable; with continuous height adjustment; length: 500 mm



Porte-table Page 65

Chair trucks

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-710.028	P	570	540	1305	320	250	19,5	250
sk-710.029	SR	570	540	1305	320	250	23,5	250

Aluminium Chair trucks

ap-710.058	P	570	540	1305	320	250	11,5	250	260×85
ap-710.059	SR	570	540	1305	320	250	15,5	250	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Furniture truck
Article no. ap-710.201



Furniture truck
Article no. sk-710.230

Furniture trucks

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-710.230	P	570	636	1400	360	330	18,0	250
sk-710.231	SR	570	636	1400	360	330	21,5	250

Aluminium versions

ap-710.200	P	570	636	1400	360	330	8,5	150	260×85
ap-710.201	SR	570	636	1400	360	330	12,5	150	250×60

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium trucks with folding toe plate

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-710.213	P	570	570	1300	480	300	20,5	250
sk-710.214	SR	570	570	1300	480	300	25,0	250

Steel-rim wheels with precision deep-groove ball bearings

P = pneumatic tyres, SR = solid-rubber tyres



Aluminium truck
Article no. sk-710.213

Stair-climber trucks


Stair-climber trucks

Robust welded construction; with safety handles; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Available with 2 three-arm or five-arm star wheels; pneumatic or solid-rubber tyres on pressed-steel wheels with ball bearings and plastic wheel caps

Stair-climber truck with 2 five-arm star wheels (TR) / with large toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sk-710.209	P	570	721	1310	480	300	28,5	200
sk-710.211	P	570	721	1310	300	250	26,0	200

P = pneumatic tyres, TR = Thermoplastic rubber tyres

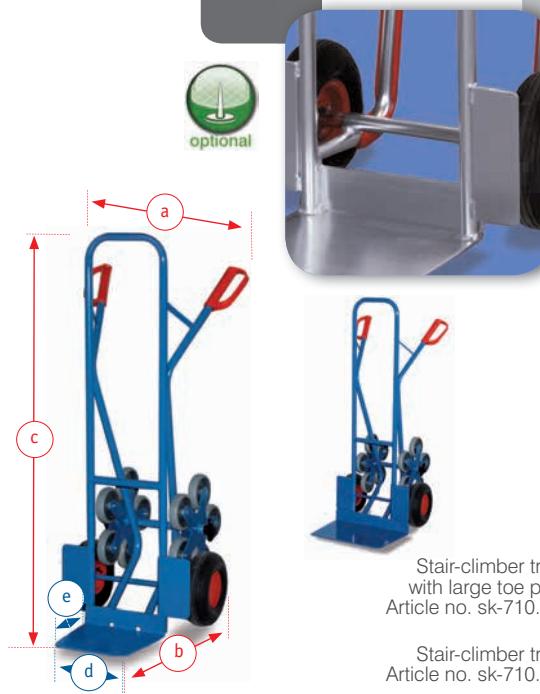

Stair-climber truck with large toe plate
Article no. sk-710.209

Stair-climber truck
Article no. sk-710.211



Info page 11, 77

Stair-climber truck
Article no. sk-1301



Stair-climber trucks with 2 three-arm star wheels / large toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sk-710.212	TR	570	626	1310	320	250	22,5	200
sk-710.210	TR	570	676	1310	480	300	23,5	200

TR = Thermoplastic rubber tyres



Stair-climber truck with large toe plate
Article no. sk-710.210

Stair-climber truck
Article no. sk-710.212



Stair-climber truck
Article no. sk-1300

Stair-climber truck with 2 three-arm star wheels

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sk-1300	TR	570	631	1305	300	260	22,5	200

TR = Thermoplastic rubber tyres



Aluminium stair-climber truck with large toe plate
Article no. ap-710.209



Aluminium stair-climber truck
Article no. ap-710.207

Aluminium stair-climber trucks

Welded aluminium construction; with aluminium toe; safety handles; Very light and easy to manoeuvre; Available with 2 three-arm or five-arm star wheels; pneumatic or solid-rubber tyres on pressed-steel wheels with ball bearings and plastic wheel caps

Aluminium stair-climber trucks with 2 five-arm star wheels (TR) / with large toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.209	P	570	721	1310	480	300	16,0	200
ap-710.207	P	570	671	1310	300	250	15,0	200

P = pneumatic tyres, TR = Thermoplastic rubber tyres



Aluminium stair-climber truck with 2 five-arm star wheels (TR)

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-1301	P	570	675	1305	300	260	15,5	200

P = pneumatic tyres, TR = Thermoplastic rubber tyres



Aluminium stair-climber truck with large toe plate
Article no. ap-710.210



Aluminium stair-climber truck
Article no. ap-710.208

Aluminium stair-climber trucks with 2 three-arm star wheels / large toe plate

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-710.210	TR	570	676	1310	480	300	13,5	200
ap-710.208	TR	570	626	1310	320	250	12,5	200

TR = Thermoplastic rubber tyres



Aluminium stair-climber trucks with 2 three-arm star wheels

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
ap-1300	TR	570	631	1305	300	260	12,5	200

TR = Thermoplastic rubber tyres

Aluminium stair-climber truck
Article no. ap-1300

Tubular-steel trucks



Tubular-steel trucks

Robust welded construction; with safety handles; Toe of sheet steel; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres on pressed-steel wheels with ball bearings and plastic wheel cap

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	mm			d	e			
	a	b	c	d	e			
sk-1150	SR	500	500	1100	400	110	15,5	200
sk-1151	P	500	500	1100	400	110	13,0	200
								250x60
								260x85

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-1150

Tubular-steel truck
Article no. sk-1151



Tubular-steel truck
Article no. sk-1153



Tubular-steel truck
Article no. sk-1155

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	mm			d	e			
	a	b	c	d	e			
sk-1152	SR	600	510	1150	450	120	16,0	250
sk-1153	P	600	510	1150	450	120	13,5	250
								260x85

P = pneumatic tyres, SR = solid-rubber tyres

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	mm			d	e			
	a	b	c	d	e			
sk-1154	SR	600	530	1150	450	120	18,5	250
sk-1155	P	600	530	1150	450	120	16,0	250
								260x85

P = pneumatic tyres, SR = solid-rubber tyres



Tubular-steel truck
Article no. sk-1251

Tubular-steel trucks

Article no.	Dimension			Toe plate		Weight	Load cap.	Wheel diam.
	mm			d	e			
	a	b	c	d	e			
sk-1250	SR	650	540	1250	450	150	19,5	250
sk-1251	P	650	540	1250	450	150	17,0	250
								260x85

P = pneumatic tyres, SR = solid-rubber tyres

Appliance trucks



Appliance truck
Article no. sk-1400



Appliance truck
Article no. sk-1157



Appliance truck
Article no. sk-1156



Appliance trucks

Robust welded construction; with safety handles; for transporting ovens, refrigerators, washing machines etc.; Toe and bars with hollow rubber profile protect the transported goods and reduced the risk of slipping; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic tyres on pressed-steel wheels with ball bearing and wheel cap, or with 2 three-arm star wheels for stair-climbing transport; Additional carrying bar available for stair-climbing applications



Appliance truck

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-1400	SR	705	575	1450	450	122	32,0	250 250×60

SR = solid-rubber tyres

Appliance truck with 2 three-arm star wheels

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-1157	TR	660	520	1150	450	150	21,0	250 160×40

TR = Thermoplastic rubber tyres



Appliance truck with pneumatic tyres

Article no.		Dimension			Toe plate	Weight	Load cap.	Wheel diam.
		a	b	c				
sk-1156	P	660	440	1150	450	150	17,5	250 260×85

P = pneumatic tyres

For additional carrying bars for all trucks on pages 74 to 84

Additional carrying bar for stair climbing

Article no.	Weight	Length	
	kg	mm	
gsk-1156	3,0	850	carrying bar

Additional carrying bar
Article no. gsk-1156

Steel-cylinder trucks-/ trolley



Steel-cylinder trucks

Robust welded construction; with safety handles; for easy transport of steel cylinders with a capacity of 10, 40 or 50 litres; diameter 210 – 250 mm; Cylinder holder with safety chains; Powder-coated RAL 5010 gentian blue, permanent surface protection, impact- and scratch-resistant; Pneumatic or solid-rubber tyres with ball bearings

Steel-cylinder truck for 2 steel cylinders of 40-50 litres capacity, with filler rod holder

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
fk-1300	SR	875	1010	1250	584	250	33,0	200	400×80
fk-1301	P	875	1010	1250	584	250	21,0	200	400×100

P = pneumatic tyres SR = solid-rubber tyres



Steel-cylinder truck Article no. fk-1301

Steel-cylinder truck Article no. fk-1300

Steel-cylinder truck for 2 steel cylinders of 40-50 litres capacity, with additional support roller and filler rod holder

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
fk-1302	SR	857	1030	1250	584	250	49,0	200	400×80
fk-1303	P	857	1030	1250	584	250	37,0	200	400×100

P = pneumatic tyres SR = solid-rubber tyres



Steel-cylinder truck Article no. fk-1302

Steel-cylinder truck for 2 steel cylinders of 10 litres capacity

Article no.	Dimension			Toe plate		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
fk-1000	SR	620	365	1045	465	210	10,5	50	200×50

SR = solid-rubber tyres



Steel-cylinder truck Article no. fk-1000

Steel-cylinder trolley

Welded steel construction; Push bar vertical or horizontal with dead man's brake; 2 shelves with hole cutouts ø 160 mm; Load surface of waterproof bonded plywood, surface finish screen printed, antislip; for 24 steel cylinders; Load capacity 80 kg; trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes or 2 swivel castors with dead man's brake and 2 fixed castors.

Steel-cylinder trolley for 24 cylinders,

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg	Wheel diam. mm	
	a	b	c	d	e				
sw-700.295	TR	1250	1000	760	1000	700	62,0	500	200

Steel-cylinder trolley for 24 cylinders, with dead man's brake

Article no.	Dimension	Loading surface	Weight kg	Load cap. kg	Wheel diam. mm				
sw-700.287	TR	1250	1000	760	1000	700	65,5	500	200

Swivel castors with wheel brake or dead man's brake and foot guards for your safety

TR = Thermoplastic rubber tyres

Brake applied

Brake released



Steel-cylinder trolley Article no. sw-700.287

NEW

The perfect form
of transport
VARIOfit®



Steel-cylinder truck
Article no. fk-1101



Steel-cylinder truck
Article no. fk-1206/11



Steel-cylinder truck
Article no. fk-1200



Steel-cylinder truck
Article no. fk-1001



Toolbox
Article no. zfk-460.000

Steel-cylinder trucks

Steel-cylinder trucks

Robust welded construction; with safety handles; for easy transport of steel cylinders with a capacity of 10, 20, 40 or 50 litres; diameter 210 – 250 mm; Cylinder holder with safety chains; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres with ball bearings



Steel-cylinder trucks for 2 steel cylinders of 20 litres capacity

Article no.		Dimension		Toe plate		Weight	Load cap.	Wheel diam.
		a	b	c	d			
fk-1100	SR	730	572	1115	536	210	18,0	100
fk-1101	P	730	572	1115	536	210	14,0	100

P = pneumatic tyres SR = solid-rubber tyres



Steel-cylinder truck for 1 steel cylinder of 40 – 50 litres capacity

Article no.		Dimension		Toe plate		Weight	Load cap.	Wheel diam.
		a	b	c	d			
fk-1200	SR	463	425	1185	260	260	8,0	100
fk-1201	P	463	425	1185	260	260	7,5	100

P = pneumatic tyres SR = solid-rubber tyres

Steel-cylinder trucks for Ø 320 mm, 11 kg or 33 kg propan

Article no.		Dimension		Toe plate		Weight	Load cap.	Wheel diam.
		a	b	c	d			
fk-1204/11	SR	580	530	1200	350	340	12,0	100
fk-1204/33	SR	580	530	1200	350	340	12,0	200 x 60
fk-1206/11	P	580	530	1200	350	340	11,5	100
fk-1206/33	P	580	530	1200	350	340	11,5	260 x 85

P = pneumatic tyres SR = solid-rubber tyres

Steel-cylinder stand for 2 cylinders of 40 – 50 litres capacity, incl. drill holes for wall fixing

Article no.		Dimension		Toe plate		Weight
		a	b	c	d	
fk-1001		568	284	1100	550	280



Additional toolbox

Article no.	Dimension			Weight
	a	b	c	
zfk-460.000	460	205	153	4,0
zfk-460.001	460	205	153	fk-1000
zfk-460.002	460	205	153	fk-1100 / 1101
zfk-460.003	460	205	153	fk-1302 / 1303

Parcel trucks / Newspaper trucks

Lightweight folding truck


Welded tubular steel; Double fold for easy transport; locking and unlocking by cable; Grip with soft plastic cover; Powder-coated RAL 5010 gentian blue, permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres on pressed-steel wheels with ball bearings and wheel cap



Lightweight folding truck

Article no.	Dimension		Toe plate		Weight	Load cap.	Wheel diam.		
	mm	mm	mm	mm					
	a	b	c	d	e				
sk-710.420	P	430	713	1165	377	455	10	80	230x70


P = pneumatic tyres

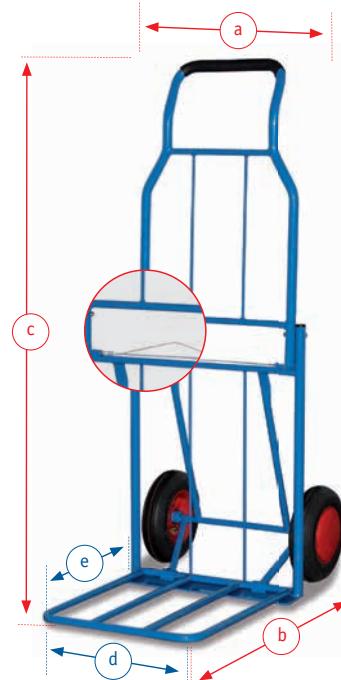

Lightweight folding truck
Article no. sk-710.420

Parcel truck and newspaper truck

Welded tubular steel; Parcel truck powder-coated RAL 5010 gentian blue; newspaper truck powder-coated RAL 3000 fire red; permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres



Parcel trucks, folding toe

Article no.	Dimension		Toe plate		Weight	Load cap.	Wheel diam.		
	mm	mm	mm	mm					
	a	b	c	d	e				
pr-4000	SR	540	637	1026	390	295	10,0	150	200x50
pr-4001	P	540	637	1026	390	295	10,0	150	220x70

P = pneumatic tyres SR = solid-rubber tyres



Parcel truck
Article no. pr-4000



Parcel truck
Article no. pr-4002

Parcel trucks, double-fold version

Article no.	Dimension		Toe plate		Weight	Load cap.	Wheel diam.		
	mm	mm	mm	mm					
	a	b	c	d	e				
pr-4002	SR	540	637	1028	390	295	11,5	100	200x50
pr-4003	P	540	637	1028	390	295	11,0	100	220x70

P = pneumatic tyres SR = solid-rubber tyres



Newspaper truck
Article no. st-710.006

Newspaper truck, folding load surface and folding sides

Article no.	Dimension		Toe plate		Weight	Load cap.	Wheel diam.		
	mm	mm	mm	mm					
	a	b	c	d	e				
st-710.006	SR	673	410	1025	490	300	8,5	200	200x50

SR = solid-rubber tyres

VARIOfit®



Drum handling

Drum trucks



Drum trucks



Drum trucks

Welded tubular steel; with safety handles; for transporting drums; For all 200-litre drums with rim; only partly suitable for plastic drums; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic or solidrubber tyres with ball bearings; support wheels of thermoplastic rubber with ball bearings

Drum trucks

Article no.	Dimension		Loading surface	Weight	Load cap.	Wheel diam.
	mm	mm				
fk-1102	SR	700	1600	for 200l drums	16,0	250
fk-1103	P	700	1600	for 200l drums	14,0	250

P = pneumatic tyres SR = solid-rubber tyres



Drum truck
Article no. fk-1103

Drum trucks

With one supporting swivel castor from thermoplastic rubber diam. 200 x 50 mm height 1600 / 900 mm, wide 700 mm

Drum trucks with 1 supporting swivel castor (TR)

Article no.	Dimension		Loading surface	Weight	Load cap.	Wheel diam.
	mm	mm				
fk-1104	SR	700	1600	for 200l drums	17,0	250
fk-1105	P	700	1600	for 200l drums	15,0	250

P = pneumatic tyres SR = solid-rubber tyres



Drum truck
Article no. fk-1104




Drum trucks with 2 supporting wheels (TR)

Article no.	Dimension		Weight	Load cap.	Wheel diam.
	mm	mm			
zu-3341	SR	700	1600	19,0	250
zu-3342	P	700	1600	17,0	250

P = pneumatic tyres SR = solid-rubber tyres



Drum truck
Article no. zu-3341

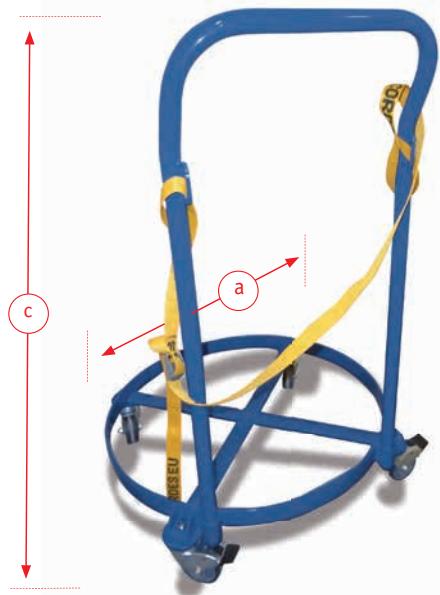

Drum dolly
Article No. sw-610.010



Drum dolly
Article no. sw-610.000

Drum dolly with push bar

For easy transport of 200-litre drums; with load securing strap; Surface powder-coated RAL 5010 gentian blue; permanent surface protection; impact and scratch resistant

Drum dolly with push bar

Article No.	Dimensions		Load cap.	Weight	Load cap.	Wheel diam.	
	mm	mm					
	a	c					
sw-610.010	TR	610	930	for 200-litre drums	13	250	75

Incl. webbing strap for securing drum

TR = Thermoplastic rubber tyres

Drum dolly

Welded steel construction; For upright transport of 200-litre drums; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch resistant; 4 thermoplastic rubber tyres with plain bearings, incl. 2 with wheel brakes

Drum dolly

Article no.	Dimension	Weight	Load cap.	Wheel diam.
sw-610.000	610	7,0	250	75

Drum truck

Welded tubular steel; with plastic skids and safety handles; Webbing strap for securing load; Surface powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Solid rubber tyres on steel wheels with precision deep-groove ball bearings



Drum truck
Article No. fk-1109

Suitable for transporting
120-220 litre plastic drums

Liquid can be drained in horizontal position



Drum truck for plastic drums

Article No.	Dimensions			Load cap.	Weight	Load cap.	Wheel diam.	
	mm	a	b	c				
fk-1109	SR	640	470	1300	for 200-litre drums	17	250	250
fk-1110	P	640	470	1300	for 200-litre drums	16	250	260

Steel wheels with precision deep-groove ball bearings,
webbing strap for securing drums

SR = solid rubber tyres, P = pneumatic tyres

Drum dispenser




Drum dispensers

Welded tubular steel construction; with lever handle; for moving, storing and emptying 200-litre steel drums; Powder-coated RAL 5010 gentian blue; permanent surface protection; 2 polyamide swivel castors with wheel brakes 100 x 38 mm and 2 polyamide wheels 125 x 40 mm; The drum rests either on 4 plastic wheels or in the case of thin-walled drums, on 2 steel rollers

Drum dispenser with 4 plastic wheels

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	mm						
zu-3201	810	720	575	for 200l drums	13,0	250	125

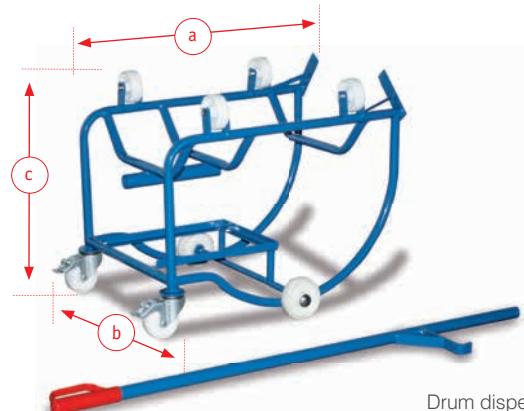

Drum dispenser
Article no. zu-3201

Additional Articles

Article no.
zu-3150 10 l Drip trays



Drum dispenser like zu-3201, but with 2 steel rollers
diam. 60 mm, Length 500 mm, for thin-walled drums.



Drum dispenser
Article no. zu-3202

Drum dispenser with 2 steel rollers 60 x 500 mm, for thin-walled drums

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	mm						
zu-3202	810	720	575	for 200l drums	22,0	250	125



Drum dispenser
Article no. zu-3203



Drum dispenser with drip tray 203 litres capacity


Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	mm						
zu-3203	1450	720	650	for 200l drums	79,0	250	125

Drip trays



Drip trays


Welded steel oil-tight; with galvanised grating; mesh size 30 x 30 mm; for 2 or 4 x 200-litre drums; Incl. 4 feet; ground clearance = 100 mm; Trough powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant

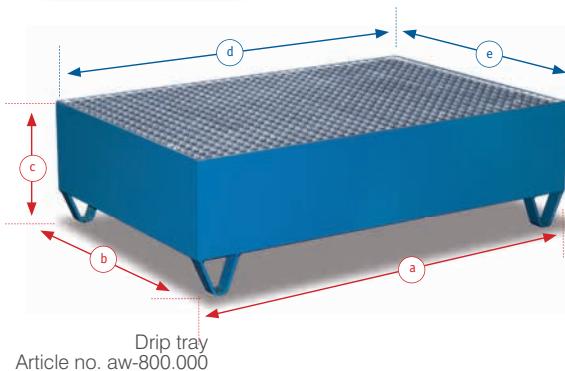

Drip tray
Article no. aw-800.000

Drip tray with grating for 2 x 200-litre drums

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg
	a	b	c	d	e		
aw-800.000	1200	800	360	1200	800	69,5	500

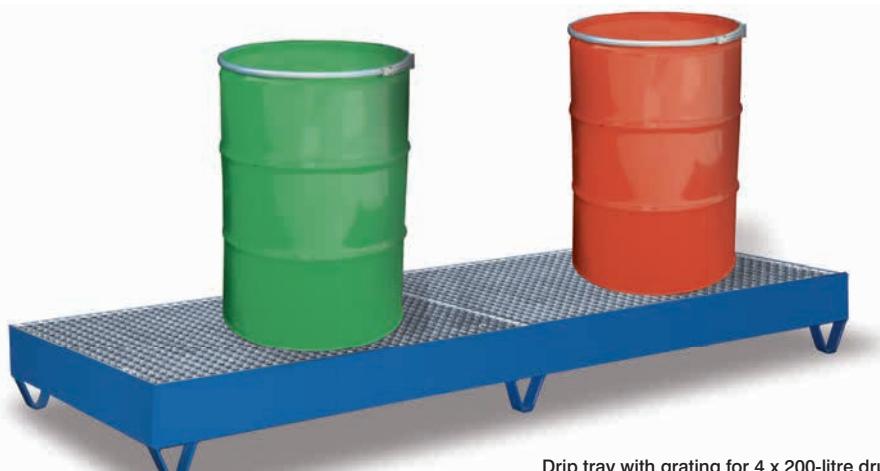

Drip tray
Article no. aw-800.002

Drip tray with grating for 4 x 200-litre drums

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg
	a	b	c	d	e		
aw-800.002	2390	790	250	2390	790	110,5	1000



Outlet cock for Articles on pages 53, 92, 93, 95
Article no.

zsw-000.500 Outlet cock, for draining liquids
for articles with sheet-steel trough as ex-factory equipment

Drip tray with grating for 4 x 200-litre drums

Article no.	Dimension			Loading surface		Weight kg	Load cap. kg
	a	b	c	d	e		
aw-120.000	1200	1200	285	1200	1200	85,0	1000

Drip tray
Article no. aw-120.000



Stacking frame with drip tray / Pushbar trolley with drip tray

Stacking frame with drip tray

Stacking frame, strong welded steel construction, 4 push-in posts with stacking ends inclined inwards; 4 connecting tubes; steel pan with galvanized grating for collecting liquids; volume 230 l; powder-coated RAL 5010 gentian blue; durable surface protection; impact and scratch resistant; stacking feet flush with frame; 8 stacking supports



NEW

Stacking frame with drip tray

Article no.	Dimension mm		Loading surface mm		Weight kg	Load cap. kg	Top Load kg	stackable
	a	b	c	d				
aw-125.000	1250	1250	1400	1124	1124	219	2400	1000
								3x

Stacking frame with drip tray
Article no. aw-125.000

Pushbar trolley with drip tray

Welded steel oil tight; Sheet-steel trough; capacity 42.5 litres; galvanised grating, mesh size 30 x 30 mm; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors



Pushbar trolley with drip tray

Article no.	Dimension mm		Loading surface mm		Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c	d			
sw-600.121	1098	600	941	986	586	42,0	250
							125

Pushbar trolley
Article no. sw-600.121



Cleaning trolley / Waste collection stand

VARIOfit
The perfect form
of transport



Cleaning trolley

Welded steel construction; with lockable sheetsteel compartment; with holders for plastic sacks and cleaning tools; Pushbars with plastic safety handles; Surface powder-coated RAL 2009 traffic orange; permanent surface protection; impact- and scratch-resistant; Rear axle with two 400-mm pneumatic castors on steel wheels; front axle with 2 thermoplastic castors 160 mm

Cleaning trolley

Article No.	Dimensions			Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c			
sw-780.100	780	800	1030	32	100	400

incl. steel compartment with triangular lock



Waste collection stand
Article No. sw-240.100

Waste collection stand
Article No. sw-240.200

Waste collection stand

Welded tubular steel; holder for 240-litre plastic sacks; foldable open frame for securing waste collection sack; sack opening with 40° inclination; surface powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant

Waste collection stand

Article No.	Dimensions			Load cap. ltr.	Weight kg
	a	b	c		
sw-240.100	630	540	1190	240	14
sw-240.200	470	320	1190	240	12

Sack opening with 40° inclination



Roll stand
Article No. sg-100.011

Roll stand for storing material on rolls

Strong welded steel design; chrome-plated loading bar; loading height 800 mm; painted 5012 light blue



Roll truck
Article No. sk-1310

Roll stand for storing material on rolls

Article No.	Dimensions			loading height mm	Weight kg	Load cap. kg
	a	b	c			
sg-100.011	1630	1000	1200	800	22,5	100

Roll truck

Strong welded steel design; pullbar with horizontal handle; powder coated RAL 5010 gentian blue; durable surface protection; impact and scratch resistant; wheels with pneumatic tyres on steel rims with ball bearings

Roll truck for transporting rolls in horizontal position

Article No.	Dimensions			Weight kg	Load cap. kg	Wheel diam. mm
	a	b	c			
sk-1310	2700	820	840	30,0	400	400 x 100

Self-tippers for bulk material



Self-tipper for bulk material

Welded steel construction; with roll-away system; Tipping by manual release or by contact with container to be filled; Automatic return after trough is emptied; Fork-lift tunnel for safe transport; Painted RAL 5012 light blue; Facility for retrofitting wheels; Various wheel types with different carrying capacities available as options

Self-tipper

Article no.	Dimension			inner height	Bulk-edge height	Weight	Load cap.	Volume
	mm		mm			kg	kg	l
	a	b	c					
sw-300.004	1235	840	750	420	750	83	1500	300
sw-500.004	1350	1488	605	480	605	121	1500	520
sw-600.004	1512	860	866	735	866	108	2000	600
sw-100.004	1498	1203	1072	940	1072	167	2000	1000



Self-tipper
Article no. sw-300.004

Additional Articles (wheelset)

Article no.		Load cap.	Wheel diam.
zsw-000.500	Outlet cock	-	-
rsa-200.400	Wheel with thermoplastic rubber	500	200
rsa-200.401	Polyamide wheels	1050	200
rsa-200.402	Elastic-solid-rubber wheels	1050	200
rsa-200.403	Polyurethane wheels 92°	1500	200
rsa-200.404	Polyurethane wheels 92°	2000	200

The type of wheels used may reduce the carrying capacity.



Thermoplastic rubber wheels



Polyamide wheels



Elastic-solid-rubber wheels



Polyurethane wheels



VARIOfit[®]



Hand trucks

Bicycle trailers



Hand trucks / Bicycle trailers




Hand trucks

Welded steel construction; with optional side walls; railing 220 mm high; with reflective films; load surface and side walls of waterproof bonded plywood, surface finish screen printed, anti-slip; Truck powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Wheels with pneumatic tyres and ball bearings

Hand trucks without side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1290	790	435	740	21,0	200	260×85
zu-1291	830	535	840	25,0	400	400×100
zu-1292	1130	535	840	30,0	400	400×100
zu-1278	1000	635	940	34,0	400	400×100

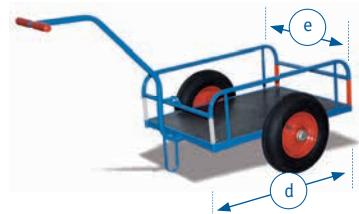

Hand truck
Article no. zu-1290

The perfect form
of transport
VARIOfit®

Hand trucks with side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1280	765	435	740	24,0	200	260×85
zu-1281	805	535	840	28,0	400	400×100
zu-1282	1105	535	840	34,0	400	400×100
zu-1279	975	635	940	38,0	400	400×100



Hand truck
Article no. zu-1280

Bicycle trailer

With optional side walls; all bicycle trailers are supplied with complete trailer coupling; the ball socket is welded to the towbar; the ball head with clamp is supplied loose for the user to fit to the cycle frame; with reflective films; Load surface and side walls of waterproof bonded plywood, surface finish screen printed, anti-slip; Trolley powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Wheels with pneumatic tyres and ball bearings



including trailer coupling

Bicycle trailer without side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1380	790	435	740	21,0	200	260×85
zu-1381	830	535	840	25,0	400	400×100
zu-1382	1130	535	840	30,0	400	400×100



Bicycle trailer
Article no. zu-1380

Bicycle trailers with side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1390	765	435	740	24,0	200	260×85
zu-1391	805	535	840	25,0	400	400×100
zu-1392	1105	535	840	34,0	400	400×100



Bicycle trailer
Article no. zu-1390

Lightweight bicycle trailer and lightweight hand truck

Especially light body; with reflective films; load surface and side walls of waterproof bonded plywood, surface finish screen printed, anti-slip; Total width 640 mm; Truck powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Wheels with pneumatic tyres and ball bearings

**Bicycle trailer only for material-transport.
Only for internal transport.**

Light bicycle trailer with side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1180	700	425	640	15,0	150	310×50



Light bicycle trailer
Article no. zu-1180

Light hand truck with side walls

Article no.	Loading surface		Total width	Weight	Load cap.	Wheel diam.
	d	e	mm	kg	kg	mm
zu-1181	700	425	640	15,0	150	310×50




Light hand truck
Article no. zu-1181



Hand platform trolleys

Hand platform trolleys

Welded steel construction; optional side walls or tubular grid; with reflective films; with turntable steering and ball-bearing steering rings; Automatic parking brake acting on front wheels; Drawbar with safety handle and soft grip cover; automatically damped return to rest position; Multi-ply waterproof bonded plywood, surface finish screen printed, anti-slip; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Pneumatic or solid-rubber tyres

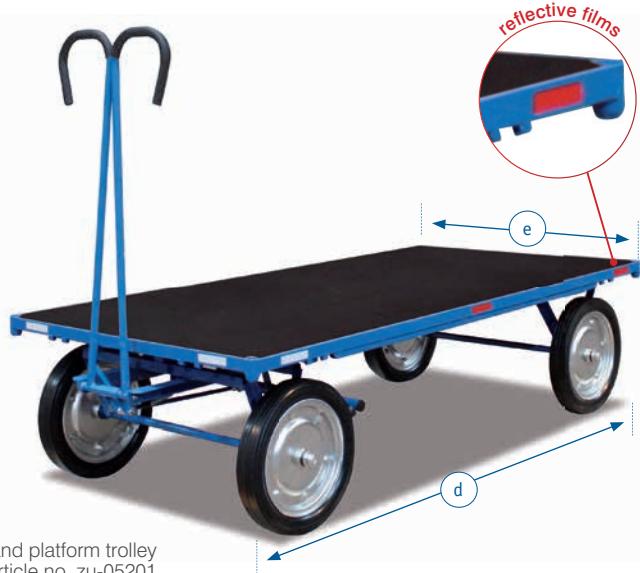

Hand platform trolley
Article no. zu-05201



Hand platform trolley
Article no. zu-15132

Hand platform trolleys without side walls / Loading height 410 mm

Article no.		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
		d mm	e mm			
zu-05101	SR	1000	700	59,0	700	250×60
zu-05102	P	1000	700	53,0	700	260×85
zu-05121	SR	1200	800	68,0	700	250×60
zu-05122	P	1200	800	62,0	700	260×85

P = pneumatic tyres SR = solid-rubber tyres

Hand platform trolleys without side walls / Loading height 480 mm

Article no.		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
		d mm	e mm			
zu-05131	SR	1200	800	92,0	1000	400×80
zu-05132	P	1200	800	68,0	1000	400×100
zu-05161	SR	1600	800	98,0	1000	400×80
zu-05162	P	1600	800	74,0	1000	400×100
zu-05201	SR	2000	1000	136,0	1250	400×80
zu-05202	P	2000	1000	112,0	1250	400×100

P = pneumatic tyres SR = solid-rubber tyres



Automatic parking brake acting on front wheels and drawbar with safety handle and automatically damped return to rest position

Hand platform trolleys with side walls, height 220 mm / Loading height 410 mm

Article no.		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
		d mm	e mm			
zu-15101	SR	960	660	76,0	700	250×60
zu-15102	P	960	660	70,0	700	260×85
zu-15121	SR	1160	760	87,0	700	250×60
zu-15122	P	1160	760	81,0	700	260×85

P = pneumatic tyres SR = solid-rubber tyres

Hand platform trolleys with 4 tubular grid side walls, height 750 mm / Loading height 480 mm

Article no.		Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
		d mm	e mm			
zu-15131	SR	1160	760	111,0	1000	400×80
zu-15132	P	1160	760	87,0	1000	400×100
zu-15161	SR	1560	760	122	1000	400×80
zu-15162	P	1560	760	98,0	1000	400×100
zu-15201	SR	1960	960	150,0	1250	400×80
zu-15202	P	1960	960	126,0	1250	400×100

P = pneumatic tyres SR = solid-rubber tyres



Hand platform trolleys with 2 tubular grid side walls, height 750 mm /
Loading height 410 mm

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-42119	SR	930	700	76,0	700 250×60
zu-42120	P	930	700	70,0	700 260×85
zu-42121	SR	1130	800	87,0	700 250×60
zu-42122	P	1130	800	81,0	700 260×85

P = pneumatic tyres SR = solid-rubber tyres

Hand platform trolleys with 2 tubular grid side walls, height 750 mm /
Loading height 480 mm

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-42131	SR	1130	800	111,0	1000 400×80
zu-42132	P	1130	800	87,0	1000 400×100
zu-42161	SR	1530	800	119,0	1000 400×80
zu-42162	P	1530	800	95,0	1000 400×100
zu-42201	SR	1930	1000	144,0	1250 400×80
zu-42202	P	1930	1000	120,0	1250 400×100

P = pneumatic tyres SR = solid-rubber tyres



Additional Articles

Article no.
01-1030 drawbar eye on drawbar
01-1031 coupling at the end

Hand platform trolleys with 4 tubular grid side walls, height 750 mm /
Loading height 410 mm

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-45101	SR	930	630	86,0	700 250×60
zu-45102	P	930	630	80,0	700 260×85
zu-45121	SR	1130	730	101,0	700 250×60
zu-45122	P	1130	730	95,0	700 260×85

P = pneumatic tyres SR = solid-rubber tyres

Hand platform trolleys with 4 tubular grid side walls, height 750 mm /
Loading height 480 mm

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-45131	SR	1130	730	125,0	1000 400×80
zu-45132	P	1130	730	101,0	1000 400×100
zu-45161	SR	1530	730	141,0	1000 400×80
zu-45162	P	1530	730	117,0	1000 400×100
zu-45201	SR	1930	930	174,0,0	1250 400×80
zu-45202	P	1930	930	150,0	1250 400×100

P = pneumatic tyres SR = solid-rubber tyres



Hand platform trolley
Article no. zu-42132



Hand platform trolley
Article no. zu-45132



CE

Industrial trailers

Industrial trailers 1-axle turntable steering

Article no.	Loading surface		LadeHeight	Load cap.	Wheel diam.
	mm	mm			
	d	e			
zu-1001	SR	2000	1000	510	2000 360×60
zu-1002	P	2000	1000	540	2000 410×110
zu-1003	SR	2500	1250	510	2000 360×60
zu-1004	P	2500	1250	540	2000 410×110
zu-1005	SR	3000	1500	510	2000 360×60
zu-1006	P	3000	1500	540	2000 410×110
zu-1007	SR	2000	1000	530	3000 400×75
zu-1008	P	2000	1000	560	3000 460×140
zu-1009	SR	2500	1250	530	3000 400×75
zu-1010	P	2500	1250	560	3000 460×140
zu-1011	SR	3000	1500	530	3000 400×75
zu-1012	P	3000	1500	560	3000 460×140
zu-1013	SR	2000	1000	530	5000 400×130
zu-1014	P	2000	1000	700	5000 530×160
zu-1015	SR	2500	1250	530	5000 400×130
zu-1016	P	2500	1250	700	5000 530×160
zu-1017	SR	3000	1500	530	5000 400×130
zu-1018	P	3000	1500	700	5000 530×160
zu-1019	SR	2500	1250	540	8000 415×200
zu-1020	SR	3000	1500	540	8000 415×200
zu-1021	SR	4000	2000	540	8000 415×200
zu-1022	SR	5000	2000	540	8000 415×200

P = pneumatic tyres SR = solid-rubber tyres

Industrial trailers 2-axle turntable steering

Article no.	Loading surface		LadeHeight	Load cap.	Wheel diam.
	mm	mm			
	d	e			
zu-1031	SR	2000	1000	510	2000 360×60
zu-1032	P	2000	1000	540	2000 410×110
zu-1033	SR	2500	1250	510	2000 360×60
zu-1034	P	2500	1250	540	2000 410×110
zu-1035	SR	3000	1500	510	2000 360×60
zu-1036	P	3000	1500	540	2000 410×110
zu-1037	SR	2000	1000	530	3000 400×75
zu-1038	P	2000	1000	560	3000 460×140
zu-1039	SR	2500	1250	530	3000 400×75
zu-1040	P	2500	1250	560	3000 460×140
zu-1041	SR	3000	1500	530	3000 400×75
zu-1042	P	3000	1500	560	3000 460×140
zu-1043	SR	2000	1000	530	5000 400×130
zu-1044	P	2000	1000	700	5000 530×160
zu-1045	SR	2500	1250	530	5000 400×130
zu-1046	P	2500	1250	700	5000 530×160
zu-1047	SR	3000	1500	530	5000 400×130
zu-1048	P	3000	1500	700	5000 530×160

P = pneumatic tyres SR = solid-rubber tyres

Industrial trailers 4-axle turntable steering

Article no.	Loading surface		LadeHeight	Load cap.	Wheel diam.
	mm	mm			
	d	e			
zu-4049	SR	2000	1000	510	2000 360×60
zu-4050	P	2000	1000	540	2000 410×110
zu-4051	SR	2500	1250	510	2000 360×60
zu-4052	P	2500	1250	540	2000 410×110
zu-4053	SR	3000	1500	510	2000 360×60
zu-4054	P	3000	1500	540	2000 410×110
zu-4055	SR	2000	1000	530	3000 400×75
zu-4056	P	2000	1000	560	3000 460×140
zu-4057	SR	2500	1250	530	3000 400×75
zu-4058	P	2500	1250	560	3000 460×140
zu-4059	SR	3000	1500	530	3000 400×75
zu-4060	P	3000	1500	560	3000 460×140
zu-4061	SR	2000	1000	530	5000 400×130
zu-4062	P	2000	1000	700	5000 530×160
zu-4063	SR	2500	1250	530	5000 400×130
zu-4064	P	2500	1250	700	5000 530×160
zu-4065	SR	3000	1500	530	5000 400×130
zu-4066	P	3000	1500	700	5000 530×160

P = pneumatic tyres SR = solid-rubber tyres

4-axle turntable steering



Industrial trailers
Article no. zu-4050




Industrial trailers

Extremely robust, pulse-welded steel-section construction; with rounded corners; the steering system is of turntable design with heavy-duty precision deep-groove ball-bearing; steering ring with safety stop in accordance with German accident prevention regulations (UVV); Maximum speed: 6 km/h; Painted RAL 2004 pure orange; Heavy-duty wheels in robust welded-steel construction with elastic solid-rubber tyres or heavy-duty pneumatic wheels with industrial tread; Welded drawbar with retaining system in accordance with German accident prevention regulations (UVV) (for safety reasons all drawbars are pulse-welded, as this permits very homogeneous welds). Standard drawbar eye for 35 mm coupling bolt (offset drawbars or drawbars with swivel eyes also available on request); Caution: if the customer does not specify the height of the drawbar jaw, we accept no liability for ease of coupling of the trailer; The wheels are heavy-duty pneumatic wheels with industrial tread or heavy-duty wheels of unbreakable welded steel construction with elastic solid-rubber tyres; The hubs are fitted with dustproof encapsulated, pre-lubricated bearings in accordance with DIN ISO 355 or 15-1981; Painted RAL 2004 pure orange

Four push-fit stanchions for industrial trailer

Article no.	Loading surface	
	mm	
	d	e
zu-1069	2000	1000
	2500	1250
	3000	1500

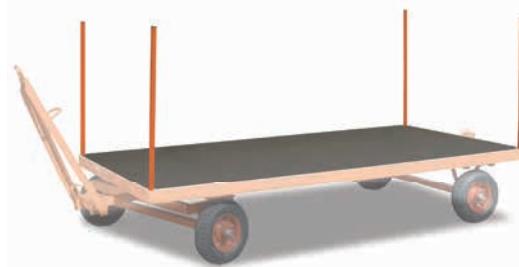

Four push-fit stanchions
Article no. zu-1069

Side walls for industrial trailer

Article no.	Loading surface	
	mm	
	d	e
zu-1060	2000	1000
zu-1061	2500	1250
zu-1062	3000	1500

4 Side walls for industrial trailer
as ex-factory equipment;
not additionally mountable




Side walls
Article no. zu-1060

Two tubular-steel end walls for industrial trailer,
750 mm high, removable

Article no.	Loading surface	
	mm	
	d	e
zu-1063	2000	1000
zu-1064	2500	1250
zu-1065	3000	1500

Two tubular-steel end walls
750 mm high

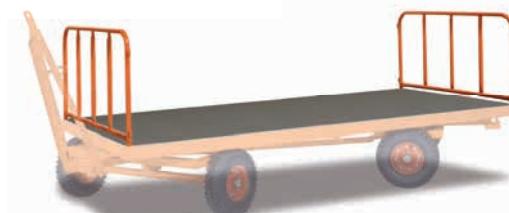

Two tubular-steel end walls
Article no. zu-1063

Four tubular-steel walls for industrial trailer,
750 mm high, removable, sides insertable

Article no.	Loading surface	
	mm	
	d	e
zu-1066	2000	1000
zu-1067	2500	1250
zu-1068	3000	1500


Four tubular-steel walls
750 mm high,
removable




Four tubular-steel walls
Article no. zu-1066



Two-wheeled platform
Article no. zu-1130

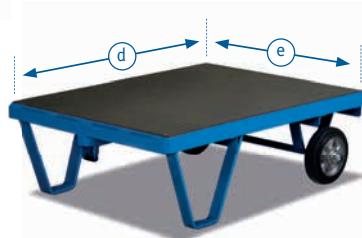

Two-wheeled platform
Article no. zu-1134

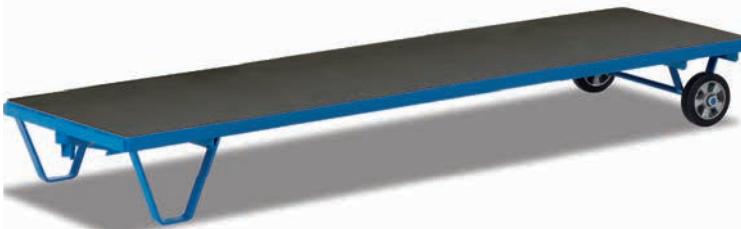

Two-wheeled platform
Article no. zu-1139



Safety quick-lift jack
Article no. zsw-1000

Two-wheeled platforms / Safety quick-lift jack

Two-wheeled platform

2 support runners; socket with safety catch; Load surface of waterproof bonded plywood, surface finish screen printed, anti-slip; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Elastic solid-rubber or polyurethane tyres; ball bearings; mounted on a single axle

Two-wheeled platforms

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-1130	ER 1005	700	55	1000	200
zu-1131	ER 1205	800	58	1000	200
zu-1132	ER 1605	900	62	1000	200
zu-1133	ER 2005	1000	67	1000	200

ER = Elastic-solid-rubber wheels

Two-wheeled platforms, reinforced version with large wheels

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-1134	ER 1005	700	56	1500	250
zu-1135	ER 1205	800	59	1500	250
zu-1136	ER 1605	900	63	1500	250
zu-1137	ER 2005	1000	69	1500	250
zu-1138	ER 2505	800	75	1500	250
zu-1141	PO 1205	800	63	2000	250
zu-1142	PO 1605	900	68	2000	250
zu-1143	PO 2005	1000	74	2000	250
zu-1144	PO 2505	800	80	2000	250
zu-1147	PO 1205	800	64	3000	250
zu-1148	PO 1605	900	69	3000	250
zu-1149	PO 2005	1000	75	3000	250
zu-1150	PO 2505	800	81	3000	250

ER = Elastic-solid-rubber wheels, PO = Polyurethane wheels

Two-wheeled platform with additional tubular bearers as reinforcement

Article no.	Loading surface		Weight kg	Load cap. kg	Wheel diam. mm
	d mm	e mm			
zu-1139	ER 3305	800	97	1500	250
zu-1140	ER 4005	800	116	1500	250
zu-1145	PO 3305	800	104	2000	250
zu-1146	PO 4005	800	124	2000	250
zu-1151	PO 3305	800	105	3000	250
zu-1152	PO 4005	800	126	3000	250

ER = Elastic-solid-rubber wheels, PO = Polyurethane wheels

Safety quick-lift jack

With locking system; reliable engagement with two-wheeled platform; Elastic solid-rubber wheels; ball-bearing hubs

Safety quick-lift jack

Article no.	Load cap. kg	for wheeled platforms with Load cap.		Wheel diam. mm
		kg	kg	
zsw-1000	500		1000	180
zsw-1500	750		1500	250
zsw-2000	1000		2000	250
zsw-3000	1500		3000	250

Suitable only for two-wheeled platforms on page 100



Quick-lift jack

With ball head; ball without safety catch



Quick-lift jack

Article no.	Weight	Load cap.	Wheel diam.
	kg	kg	mm
zu-1100	7.0	500	200×50

Suitable only for two-wheeled platforms on page 103

Quick-lift jack
Article no. zu-1100

Two-wheeled platforms

Welded steel construction; with 2 support runners; ball head without safety catch; Platform and optional walls of wood-based board, surface finish beech; Walled version has stacking corners with locating cups; walls permanently riveted; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; 2 fixed castors of thermoplastic rubber with precision deep-groove ball bearings

Two-wheeled platforms

Article no.	Dimension		Weight	Load cap.	Wheel diam.
	mm	mm			
zu-1109	d 900	e 500	38	500	200×50
zu-1110	1000	700	41	500	200×50
zu-1112	1200	800	43	500	200×50
zu-1116	1600	900	46	500	200×50



Two-wheeled platform
Article no. zu-1109

Two-wheeled platforms with end walls, stacking height 550 mm, usable height 290 mm, stackable four high when unloaded

Article no.	Dimension		Weight	Load cap.	Wheel diam.
	mm	mm			
zu-1120	d 1000	e 700	47	500	200×50
zu-1121	1200	800	49	500	200×50



Two-wheeled platform
Article no. zu-1120

Two-wheeled platform with 4 walls, stacking height 550 mm, usable height 290 mm, stackable four high when unloaded

Article no.	Dimension		Weight	Load cap.	Wheel diam.
	mm	mm			
zu-1122	d 1000	e 700	52	500	200×50
zu-1123	1200	800	54	500	200×50




Two-wheeled platform
Article no. zu-1122



Steel-frame dollies for pallets

Steel-frame dollies for pallets

Robust welded steel construction; for Euro pallets or cage pallets; also available with 2 angle-steel frames; Incl. locating cups and lifting rings; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; Grey non-marking thermoplastic rubber tyres or elastic solid-rubber tyres on cast aluminium wheels; with precision deep-groove ball bearings; thread and foot guard; 2 swivel castors with wheel brakes and 2 fixed castors

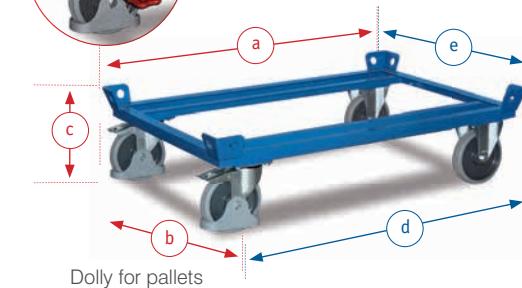

NEW



NEW



Steel frame dollies for cage pallets 500kg carrying capacity

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-870.041	TR	870	670	350	800	600	25,0	500
sw-870.015	TR	1070	870	350	1000	800	30,0	500
sw-870.000	TR	1270	870	350	1200	800	32,5	500
sw-870.020	TR	1270	1070	350	1200	1000	33,0	500

Steel frame dollies for cage pallets 500kg carrying capacity with EasySTOP

Article no.	TR	870	670	350	800	600	25,0	500	200
sw-870.241	TR	870	670	350	800	600	25,0	500	200
sw-870.215	TR	1070	870	350	1000	800	30,0	500	200
sw-870.200	TR	1270	870	350	1200	800	32,5	500	200

Swivel castors with foot guards for your safety.

TR = Thermoplastic rubber tyres

Steel frame dollies for cage pallets 1200kg carrying capacity

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-870.042	ER	870	670	350	800	600	29,0	1200
sw-870.036	ER	1070	870	350	1000	800	34,0	1200
sw-870.001	ER	1270	870	350	1200	800	36,0	1200
sw-870.501	ER	1270	1070	350	1200	1000	37,0	1200

Steel frame dollies for cage pallets 1200kg carrying capacity with EasySTOP

Article no.	ER	870	670	350	800	600	29,0	1200	200
sw-870.242	ER	870	670	350	800	600	29,0	1200	200
sw-870.236	ER	1070	870	350	1000	800	34,0	1200	200
sw-870.201	ER	1270	870	350	1200	800	36,0	1200	200

Swivel castors with foot guards for your safety.

ER = Elastic-solid-rubber wheels

Steel frame dollies for cage pallets 1800kg carrying capacity (92° Shore reinforced version)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-870.341	PO	870	670	350	800	600	29,0	1800
sw-870.315	PO	1070	870	350	1000	800	34,0	1800
sw-870.300	PO	1270	870	350	1200	800	36,0	1800
sw-870.514	PO	1270	1070	350	1200	1000	37,0	1800

Steel frame dollies for cage pallets 1800kg carrying capacity (92° Shore reinforced version) with EasySTOP

Article no.	PO	870	670	350	800	600	29,0	1800	200
sw-870.243	PO	870	670	350	800	600	29,0	1800	200
sw-870.244	PO	1070	870	350	1000	800	34,0	1800	200
sw-870.245	PO	1270	870	350	1200	800	36,0	1800	200

Swivel castors with foot guards for your safety.

PO =Polyurethane wheels

Steel frame dollies for cage pallets 1050kg carrying capacity

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	a	b	c	d	e			
sw-870.441	PW	870	670	350	800	600	25,0	1050
sw-870.415	PW	1070	870	350	1000	800	30,0	1050
sw-870.400	PW	1270	870	350	1200	800	32,5	1050
sw-870.420	PW	1270	1070	350	1200	1000	33,0	1050

Steel frame dollies for cage pallets Fahrgestell für 1050kg carrying capacity with EasySTOP

Article no.	PW	870	670	350	800	600	25,0	1050	200
sw-870.247	PW	870	870	350	1000	800	30,0	1050	200
sw-870.248	PW	1070	870	350	1000	800	30,0	1050	200
sw-870.249	PW	1270	870	350	1200	800	32,5	1050	200

Swivel castors with foot guards for your safety.

PW= Polyamide wheels

Accessories

Add-on frame for pallet dolly

Strong steel construction; including 4 locating corners; height adjustment by internal spring-loaded bolt; add-on frame can be bolted to dolly



Add-on frame, height adjustable, (505 / 555 / 605 / 650 mm), retrofittable

Article no.	Dimension		Loading surface		Weight	Load cap.
	mm		mm	kg		
	a	b	d	e		
zsw-870.101	870	670	800	600	14,5	500 - 1200
zsw-870.102	1070	870	1000	800	16,0	500 - 1200
zsw-870.103	1270	870	1200	800	17,0	500 - 1200
zsw-870.104	1270	1070	1200	1000	17,5	500 - 1200



Steel frame dollies with 2 angle-steel frames, 1200kg carrying capacity

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm			mm	kg			
	a	b	c	d	e			
sw-870.115	ER	870	670	721	800	600	45,0	1200
sw-870.116	ER	1070	870	721	1000	800	49,0	1200
sw-870.101	ER	1270	870	721	1200	800	53,0	1200
sw-870.507	ER	1270	1070	721	1200	1000	59,0	1200

Steel frame dollies with 2 angle-steel frames, 1200kg carrying capacity

sw-870.113	TR	870	670	721	800	600	40,0	500	200
sw-870.114	TR	1070	870	721	1000	800	44,0	500	200
sw-870.100	TR	1270	870	721	1200	800	48,0	500	200
sw-870.506	TR	1270	1070	721	1200	1000	54,0	500	200

Swivel castors with foot guards for your safety.

ER = Elastic-solid-rubber wheels TR = Thermoplastic rubber tyres

Additional Articles

Article no.	Dimension			Weight	
	mm			kg	
zsw-870.002	780		Pushbar	3,5	

universal for all sizes. only for combined order with steel frame dolly (welded)

Additional Articles

Article no.	Dimension			Weight	
	mm			kg	
zsw-870.003	677		Shaft and Coupling	3,9	

universal for all sizes. only for combined order with steel frame dolly (welded)

Tipping unit for steel frame dolly

Robust welded steel construction; load surface of steel sheet; Basic position: horizontal position, tipping position approx. 18° to left and right; tilting movement by "foot power" by means of 2 end-mounted foot pedals with protective cap; locking in the three basic positions is by spring catch; long sides with steel lip to prevent slipping; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant

Tipping unit for steel frame dolly

Article no.	Dimension		Loading surface		Weight	
	mm		mm	kg		
	a	b	c	d	e	
sw-810.004	1685	870	658	1210	810	115,0



Pushbar Article no. zsw-870.002



Shaft and Coupling Article no. zsw-870.003



Tipping unit Article no. sw-810.004

VARIOfit[®]



Pallet converters

Pallet converters

Pallet converters - two parts -



Pallet converters

Robust tubular construction of welded steel – painted RAL 5012 light blue; suitable for Euro and industry pallets; Can be collapsed or folded to save space when not in use; Standard dimensions are TÜV tested; All pallet converters are available in various heights and as galvanised version

The perfect form
of transport
VARIOfit®



Pallet converters Type 62, all sides closed with mesh, mesh size 100 x 100 mm

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
pa-080.020	1200	800	400	4	13,5	1500
pa-080.021	1200	800	600	4	17,5	1500
pa-100.015	1200	1000	400	4	18,0	1500
pa-100.016	1200	1000	600	4	21,0	1500



Pallet converter Type 62
Article no. pa-080.020



Pallet converter separation grid

Article no.	Dimension	Weight
	mm	kg
	b	f
zpa-080.055	750	400
zpa-080.056	750	600
zpa-100.014	950	400
zpa-100.015	950	600
zpa-080.051	750	800
zpa-080.052	750	1000
zpa-080.053	750	1200
zpa-080.054	750	1600
zpa-100.022	950	800
zpa-100.023	950	1000
zpa-100.024	950	1200
zpa-100.025	950	1600

mesh size 100 x 100 mm
only for Typ 62 and 64



Pallet converter separation grid

Article no.	Dimension	Weight
	mm	kg
	b	f
zpa-080.061	750	800 / 400
zpa-080.062	750	1000 / 500
zpa-080.063	750	1200 / 600
zpa-080.064	750	1600 / 800
zpa-100.010	950	800 / 400
zpa-100.011	950	1000 / 500
zpa-100.012	950	1200 / 600
zpa-100.013	950	1600 / 800

mesh size 100 x 100 mm
only for Typ 62 and 64



consolidated



Pallet converters Type 64, all 4 sides closed with mesh, mesh size 100 x 100 mm, one long side with fold-down upper half (1200 mm)

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
pa-080.027	1200	800	800	4	21,0	1000
pa-080.028	1200	800	1000	4	22,5	1000
pa-080.029	1200	800	1200	4	26,5	750
pa-080.030	1200	800	1600	4	38,5	750
pa-100.022	1200	1000	800	4	21,5	1000
pa-100.023	1200	1000	1000	4	25,5	1000
pa-100.024	1200	1000	1200	4	31,5	750
pa-100.025	1200	1000	1600	4	39,0	750



Short side wall half way
foldable - on request



Pallet converter Type 64
Article no. pa-080.027



Pallet converters - two parts -



Pallet converter Type 63
Article no. pa-080.023



Pallet converters Type 63, all 4 sides closed with mesh,
mesh size 100 x 100 mm, except for one 1200 mm side with V-cutout

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f		kg	kg
pa-080.023	1200	800	800	3	19,0	1000
pa-080.024	1200	800	1000	3	22,0	1000
pa-080.025	1200	800	1200	3	24,0	750
pa-080.026	1200	800	1600	3	31,0	750
pa-100.018	1200	1000	800	3	24,0	1000
pa-100.019	1200	1000	1000	3	27,0	1000
pa-100.020	1200	1000	1200	3	29,0	750
pa-100.021	1200	1000	1600	3	32,5	750

Organization in the warehouse



consolidated

Pallet converter with clamping device Type 65 K

Pallet converter for subsequent fitting to loaded pallet;
Frame parts secured by manual clamping function;
Do not move when stacked!

for subsequent fitting



Pallet converter Type 65 K
Article no. pa-080.300

Pallet converters Type 65 K

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f		kg	kg
pa-080.300	1200	800	800	3	25,0	1500
pa-080.301	1200	800	1000	3	28,0	1500
pa-080.302	1200	800	1200	3	31,0	750
pa-080.303	1200	800	1600	3	34,0	750
pa-100.304	1200	1000	800	3	28,5	1500
pa-100.305	1200	1000	1000	3	30,5	1500
pa-100.306	1200	1000	1200	3	32,5	750
pa-100.307	1200	1000	1600	3	36,5	750





Pallet converters Type 65

joined and stabilised by hooking together two horizontal frames at top; The stored goods can be accessed from all sides

Pallet converters Type 65

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
pa-080.005	1200	800	800	3	21,5	1500
pa-080.006	1200	800	1000	3	24,5	1500
pa-080.007	1200	800	1200	3	27,5	750
pa-080.008	1200	800	1600	3	30,5	750
pa-100.000	1200	1000	800	3	25,0	1500
pa-100.001	1200	1000	1000	3	27,0	1500
pa-100.002	1200	1000	1200	3	29,0	750
pa-100.003	1200	1000	1600	3	33,0	750



Pallet converter Type 65
Article no. pa-080.005



Pallet converters Type 66

both long sides (1200 mm) completely open; the two ends (800 / 1000 mm) are fitted with vertical tubular bars; incl. connecting bar for stabilising the frame

Pallet converters Type 66

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
pa-080.009	1200	800	800	4	28,0	500
pa-080.010	1200	800	1000	3	31,5	500
pa-080.011	1200	800	1200	3	33,0	300
pa-100.004	1200	1000	800	4	23,0	500
pa-100.005	1200	1000	1000	3	33,0	500
pa-100.006	1200	1000	1200	3	36,0	300



Pallet converter Type 66
Article no. pa-080.009



Pallet converters - two parts -

VARIOfit
The perfect form
of transport



Pallet converter Type 68
Article no. pa-080.012



consolidated

Pallet converters Type 68

All 4 sides with diagonal tubes running from bottom corners to meet at top centre

Pallet converters Type 68

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
pa-080.012	1200	800	800	3	33,0	2000
pa-080.013	1200	800	1000	3	36,5	2000
pa-080.014	1200	800	1200	3	43,5	2000
pa-080.015	1200	800	1600	3	45,5	2000
pa-100.007	1200	1000	800	3	34,5	2000
pa-100.008	1200	1000	1000	3	38,5	2000
pa-100.009	1200	1000	1200	3	44,0	2000
pa-100.010	1200	1000	1600	3	52,0	2000



Pallet converter Type 75
Article no. pa-080.016

Pallet converters Type 75

The two 1200-mm sides have 4 vertical tubular bars each; the two ends (800 / 1000 mm) are open

Pallet converters Typ 75

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
pa-080.016	1200	800	800	4	28,5	2000
pa-080.017	1200	800	1000	4	31,5	2000
pa-080.018	1200	800	1200	3	34,5	1000
pa-080.019	1200	800	1600	3	38,5	1000
pa-100.011	1200	1000	800	4	30,0	1000
pa-100.012	1200	1000	1000	4	33,0	1000
pa-100.013	1200	1000	1200	3	35,5	500
pa-100.014	1200	1000	1600	3	41,0	500

Pallet converters - two parts - galvanised



Pallet converter - galvanised -

Robust tubular construction of welded steel – galvanised; Suitable for Euro and industry pallets; can be collapsed or folded to save space when not in use; standard dimensions are TÜV tested; All pallet converters are available in various heights



Pallet converters Type 62, all sides closed with mesh, mesh size 100 x 100 mm

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
vpa-080.020	1200	800	400	4	13,5	1500
vpa-080.021	1200	800	600	4	17,5	1500
vpa-100.015	1200	1000	400	4	18,0	1500
vpa-100.016	1200	1000	600	4	21,0	1500



Pallet converter Type 62
Article no. pa-080.020



Pallet converters separation grid

Article no.	Dimension		Weight
	mm	mm	kg
	b	f	
zpa-080.155	750	400	3,10
zpa-080.156	750	600	3,80
zpa-100.114	950	400	3,90
zpa-100.115	950	600	4,60
zpa-080.151	750	800	4,40
zpa-080.152	750	1000	5,10
zpa-080.153	750	1200	5,75
zpa-080.154	750	1600	7,60
zpa-100.122	950	800	5,40
zpa-100.123	950	1000	5,75
zpa-100.124	950	1200	6,50
zpa-100.125	950	1600	8,80

mesh size 100 x 100 mm
only for Typ 62 and 64



Pallet converters separation grid

Article no.	Dimension		Weight
	mm	mm	kg
	b	f	
zpa-080.161	750	800 / 400	4,50
zpa-080.162	750	1000 / 500	5,20
zpa-080.163	750	1200 / 600	5,85
zpa-080.164	750	1600 / 800	7,70
zpa-100.110	950	800 / 400	5,50
zpa-100.111	950	1000 / 500	5,85
zpa-100.112	950	1200 / 600	6,60
zpa-100.113	950	1600 / 800	8,90

mesh size 100 x 100 mm
only for Typ 62 and 64



consolidated



Pallet converters Type 64, all 4 sides closed with mesh, mesh size 100 x 100 mm, one long side with fold-down upper half (1200 mm)

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm	mm		kg	kg
	a	b	f			
vpa-080.027	1200	800	800	4	21,0	1000
vpa-080.028	1200	800	1000	4	22,5	1000
vpa-080.029	1200	800	1200	4	26,5	750
vpa-080.030	1200	800	1600	4	38,5	750
vpa-100.022	1200	1000	800	4	21,5	1000
vpa-100.023	1200	1000	1000	4	25,5	1000
vpa-100.024	1200	1000	1200	4	31,5	750
vpa-100.025	1200	1000	1600	4	39,0	750



Short side wall half way
foldable - on request



Pallet converter Type 64
Article no. vpa-080.027



*similar to figure



Pallet converters - two parts - galvanised



Pallet converter Type 63
Article no. vpa-080.023



consolidated

Pallet converters Type 63, all 4 sides closed with mesh, mesh size 100 x 100 mm, except for one 1200 mm side with V-cutout.

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	a	b	f		kg	kg
vpa-080.023	1200	800	800	3	19,0	1000
vpa-080.024	1200	800	1000	3	22,0	1000
vpa-080.025	1200	800	1200	3	24,0	750
vpa-080.026	1200	800	1600	3	31,0	750
vpa-100.018	1200	1000	800	3	24,0	1000
vpa-100.019	1200	1000	1000	3	27,0	1000
vpa-100.020	1200	1000	1200	3	29,0	750
vpa-100.021	1200	1000	1600	3	32,5	750

Organization in the warehouse



consolidated

Pallet converter with clamping device Type 65 K

Pallet converter for subsequent fitting to loaded pallet;
Frame parts secured by manual clamping function;
Do not move when stacked!



*similar to figure



*similar to figure



Pallet converter Type 65 K
Article no. vpa-080.300

Pallet converters Type 65 K galvanised

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	a	b	f		kg	kg
vpa-080.300	1200	800	800	3	25,0	1500
vpa-080.301	1200	800	1000	3	28,0	1500
vpa-080.302	1200	800	1200	3	31,0	750
vpa-080.303	1200	800	1600	3	34,0	750
vpa-100.304	1200	1000	800	3	28,5	1500
vpa-100.305	1200	1000	1000	3	30,5	1500
vpa-100.306	1200	1000	1200	3	32,5	750
vpa-100.307	1200	1000	1600	3	36,5	750



Pallet converters Type 65

joined and stabilised by hooking together two horizontal frames at top; The stored goods can be accessed from all sides

Pallet converters Type 65 galvanised

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
vpa-080.005	1200	800	800	3	21,5	1500
vpa-080.006	1200	800	1000	3	24,5	1500
vpa-080.007	1200	800	1200	3	27,5	750
vpa-080.008	1200	800	1600	3	30,5	750
vpa-100.000	1200	1000	800	3	25,0	1500
vpa-100.101	1200	1000	1000	3	27,0	1500
vpa-100.002	1200	1000	1200	3	29,0	750
vpa-100.003	1200	1000	1600	3	33,0	750



Pallet converter Type 65
Article no. vpa-080.005



Pallet converters Type 66

both long sides (1200 mm) completely open; the two ends (800 / 1000 mm) are fitted with vertical tubular bars; incl. connecting bar for stabilising the frame

Pallet converters Type 66 galvanised

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
vpa-080.009	1200	800	800	4	28,0	500
vpa-080.010	1200	800	1000	3	31,5	500
vpa-080.011	1200	800	1200	3	33,0	300
vpa-100.004	1200	1000	800	4	30,0	500
vpa-100.005	1200	1000	1000	3	33,0	500
vpa-100.006	1200	1000	1200	3	36,0	300



Pallet converter Type 66
Article no.vpa-080.009

*similar to figure



Pallet converters - two parts - galvanised

VARIOfit
The perfect form
of transport



Pallet converter Type 68
Article no. vpa-080.012



consolidated

Pallet converters Type 68

All 4 sides with diagonal tubes running from bottom corners to meet at top centre

Pallet converters Type 68 galvanised

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
vpa-080.012	1200	800	800	3	33,0	2000
vpa-080.013	1200	800	1000	3	36,5	2000
vpa-080.014	1200	800	1200	3	43,5	2000
vpa-080.015	1200	800	1600	3	45,5	2000
vpa-100.007	1200	1000	800	3	34,5	2000
vpa-100.008	1200	1000	1000	3	38,5	2000
vpa-100.009	1200	1000	1200	3	44,0	2000
vpa-100.010	1200	1000	1600	3	52,0	2000



Pallet converter Type 75
Article no. vpa-080.016



Pallet converters Type 75

The two 1200-mm sides have 4 vertical tubular bars each; the two ends (800 / 1000 mm) are open

Pallet converters Type 75 galvanised

Article no.	Pallet dim.		Fill height	Stacking	Weight	Load cap.
	mm	mm				
	a	b	f			
vpa-080.016	1200	800	800	4	28,5	2000
vpa-080.017	1200	800	1000	4	31,5	2000
vpa-080.018	1200	800	1200	3	34,5	1000
vpa-080.019	1200	800	1600	3	38,5	1000
vpa-100.011	1200	1000	800	4	30,0	1000
vpa-100.012	1200	1000	1000	4	33,0	1000
vpa-100.013	1200	1000	1200	3	35,5	500
vpa-100.014	1200	1000	1600	3	41,0	500



Dolly collector



Dollies

VARIOfit[®]



Dollies



Dollies

with non-slip covering; 4 swivel castors with plastic or thermoplastic rubber tyres with precision deep-groove ball bearings; Carrying capacity up to 900 kg; All dolly products are available in packaging units of 2 dollies



Dolly
Article no. mh-938.024



Dolly
Article no. mh-950.003




Dolly
Article no. mh-934.003



Dolly
Article no. mh-949.050



Dolly
Article no. mh-935.020

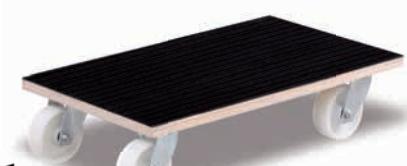

Dolly
Article no. mh-934.017



Dolly
Article no. mh-935.014

Dolly with plastic swivel castors

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-938.024	600	600	176	600	600	10,3	900	125

packaging units of 2 dollies



Dolly with thermoplastic rubber swivel castors

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-950.003	600	600	253	600	600	11,9	750	200

packaging units of 2 dollies



Dollies with plastic swivel castors

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-934.003	600	350	145	600	350	5,5	500	100
mh-938.000	600	350	175	600	350	6,5	500	125
mh-951.013	600	300	145	600	300	5,0	500	100

packaging units of 2 dollies



Dollies with thermoplastic rubber swivel castors - Premium -

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-949.050	600	350	145	600	350	5,5	350	100
mh-948.050	600	350	175	600	350	6,5	350	125
mh-949.051	600	300	145	600	300	5,0	350	100

packaging units of 2 dollies

Dollies with thermoplastic rubber swivel castors

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-935.003	600	350	145	600	350	6,0	300	100
mh-939.000	600	350	175	600	350	7,0	300	125
mh-935.020	600	300	145	600	300	5,5	300	100

packaging units of 2 dollies

Dollies with plastic swivel castors (grooved rubber mat bonded to load surface)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-934.017	600	350	145	600	350	5,5	500	100
mh-938.500	600	350	175	600	350	6,5	500	125
mh-951.500	600	300	145	600	300	5,0	500	100

packaging units of 2 dollies

Dollies with thermoplastic tyres swivel castors (grooved rubber mat bonded to load surface)

Article no.	Dimension			Loading surface		Weight	Load cap.	Wheel diam.
	mm	mm	mm	mm	kg			
a	b	c	d	e				
mh-935.014	600	350	145	600	350	6,0	300	100
mh-939.500	600	350	175	600	350	7,0	300	125
mh-935.500	600	300	145	600	300	5,5	300	100

packaging units of 2 dollies

Triple-Dogs / Dollies Europa / Dolly collector

Triple-Dogs

Multiplex plywood; 3 swivel castors with plastic or thermoplastic rubber tyres with precision deep-groove ball bearings; Carrying capacity 200 to 300 kg; All dolly products are available in packaging units of 2 dollies

Triple-Dog with plastic swivel castors

Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	a	c	kg	kg	mm
mh-540.000	540	540	145	3	300	100
packaging units of 2 dollies						



Cutomized dollies on request.

Triple-Dog with thermoplastic tyres swivel castors

Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	a	c	kg	kg	mm
mh-540.500	540	540	145	3,5	200	100
packaging units of 2 dollies						

packaging units of 2 dollies

Dollies Europa

Multiplex plywood with rubber buffer; surround as additional collision protection for walls and doors; 4 swivel castors with plastic or solid-rubber, grey non-marking, with roller bearings; or thermoplastic rubber tyres with precision deep-groove ball bearings; Carrying capacity up to 500 kg; All dolly products are available in packaging units of 2 dollies

Dolly Europa with plastic swivel castors

Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	b	c	kg	kg	mm
mh-936.003	600	350	145	5,5	500	100
packaging units of 2 dollies						

packaging units of 2 dollies

Dolly Europa with thermoplastic tyres swivel castors - Premium -



Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	b	c	kg	kg	mm
mh-949.300	600	350	145	6,0	300	100
packaging units of 2 dollies						

packaging units of 2 dollies

Dolly Europa with thermoplastic tyres swivel castors

Article no.	Dimension			Weight	Load cap.	Wheel diam.
	a	b	c	kg	kg	mm
mh-937.003	600	350	145	6,5	300	100
packaging units of 2 dollies						

packaging units of 2 dollies


Dolly collector

Welded steel construction; For approx. 40 dollies measuring 600 x 300 mm or 600 x 350 mm; Powder-coated RAL 5010 gentian blue; permanent surface protection; impact- and scratch-resistant; with four 125 mm plastic swivel castors

Dolly collector on request.


Dolly collector for 600mm x 300mm und 600mm x 350mm

Article no.	Dimension			Loading surface	Weight	Load cap.	Wheel diam.
	a	b	c	Dolly	kg	kg	mm
mh-942.500	700	720	2000	40x	22,0	250	125

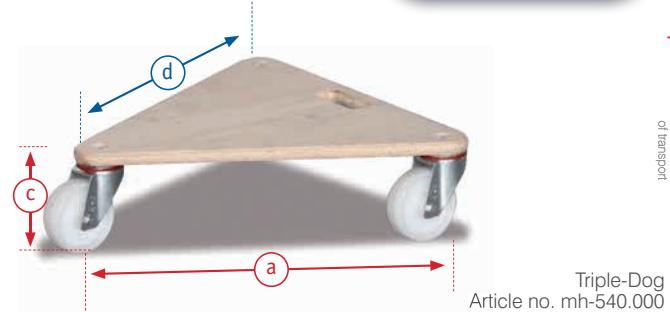

Dolly collector Article no. mh-942.500

VARIOfit®

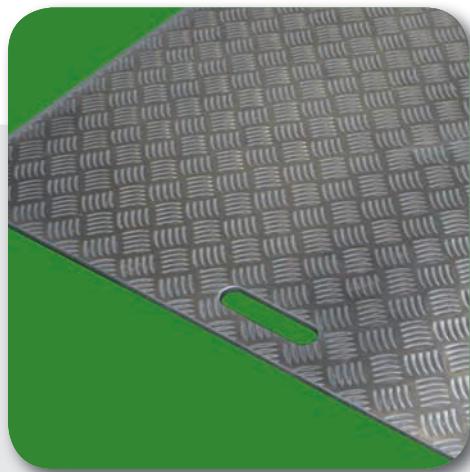

Bridge plate

Ramp




Bridge plate / Ramp



Bridge plate

Sheet aluminium for loading and unloading vehicles

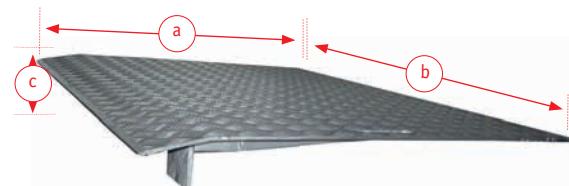

Bridge plate
Article no. sg-100.008

Bridge plate

Article no.	Dimension			Weight kg	Load cap. kg
	a mm	b mm	c mm		
sg-100.008	1000	1250	120	35,0	1200

Ramp

Ramp with movable lip for driving lift trucks into sea containers; The entire area of the ramp is resting on the ground when the lift truck drives in; it rises from 0 to 200 mm; height under the lip 190 mm; Steel construction with safety-tread steel plate 6/8 mm for the ramp; with flat-steel reinforcement at rear; lip 10/12 mm at front, angled at 10°; With retractable lifting stirrup for transporting the ramp by lift truck; all 4 corners bevelled; chain with hook on both sides to prevent shifting; Colour: Industrial paint, black



Ramp with movable lip

Article no.	Dimension			Lip Depth mm	Weight kg	Load cap. kg
	a mm	b mm	c mm			
sg-200.520	2000	1800	200	300	150,0	7500

Ramp
Article no. sg-200.520



Index



A

- add-on row for starter unit **17**
- Add-on frame for pallet dolly **105**
- pallet dolly **27, 31, 33, 38 - 40**
- additional tray **37, 38**
- aluminium **15, 18, 30, 74, 77 - 80, 82**
- aluminium truck **74, 77 - 79, 80**
- anti-slip **16, 18, 21, 22, 29, 41, 55, 60, 68, 69, 84**
- antistatic **9, 26, 27**
- appliance trucks **83, 84**

B

- ball socket **102, 103**
- bicycle trailers **97**
- board-sided box trolley **24, 25**
- book trolley **44**
- box trolley **23, 24**
- bridge plate **119**

C

- c+c trolley **16**
- c+c trolley security **17**
- cabinet with drawers **46 - 51**
- carrier-spar trolley **60**
- clamping device **108**
- cleaning trolley **94**
- chair truck **80**
- central locking system **46 - 51**
- clipboard **9**
- coin lock **17**
- corrugated bracket **58**
- coupling **97, 100 - 103**
- crate dolly **68**
- cupboards **46 - 51**
- cushion rubber tyre **74**
- cylinder trolley **87**

D

- dead man's brake **7, 34, 35, 85**
- distance piece **73**
- document trolley **42 - 44**
- dolly **116**
- dolly "Europa" **117**
- dolly collector **117**
- double-end pushbar trolley **14, 15**
- double-end trolley **19 - 22**
- drain cock **10, 53, 92, 93, 95**
- drawbar eye **97, 100, 101**
- drawer **28, 46 - 51**
- drawer divider set **10, 51**
- drip tray **52, 53, 92, 93**

- drive-in plate **119**
- drum dispenser **91**
- drum dolly **90**
- drum trolley **93**
- drum truck **89 - 90**

E

- EasySTOP **7, 10, 12, 14, 15, 18 - 21, 23 - 41, 44, 46 - 53, 56, 58, 63, 66, 67, 104, 105**
- EasySTOP NO surcharge **7, 15, 18, 36, 41, 44, 46, 47, 52, 63**

- elastic solid-rubber wheels **9, 21, 22, 29, 57, 69, 102, 105**
- electrically conductive (ESD) **8, 9, 26, 27**

- Environmentally **53, 91 - 95**
- euro container trolley **61, 62**
- euro size containers **10, 61 - 63, 66**
- euro system dolly **67**
- extension tube **73**
- extras **9 - 11**

F

- feet **73**
- folding toe **79**
- folding trolley **15**
- forked bracket **58**
- four-axle turntable steering **100**
- four-sided trolley **19 - 22, 31, 33**

G

- galvanised **9, 10, 29, 36, 40, 41, 46, 51, 58, 71 - 73, 92, 93, 111 - 114**
- galvanised steel load surfaces **9, 29**

- gas pressure spring **10**
- glass **41**
- grating **53, 92, 93**
- hand trolley **97 - 98**
- hand truck **97**
- hang-on wire basket **10**
- heavy-duty trolley **21, 22, 26, 29, 49, 94 - 102**
- hinged door **36, 46 - 51**

I

- industrial trailer **100, 101**

L

- lightweight folding truck **87**
- lifting rings **103 - 105**
- load-bearing spars **11, 84**
- locating cups **102, 103**
- lock **23, 28, 36, 43, 46 - 51**
- long-goods dolly **69**
- long-goods trolley **69**

M

- material box **10, 58**
- material crate **10, 58**
- material stand **64**



mesh	20, 23 - 25, 41, 43, 58	side-frame trolley	16, 24, 25
mesh-sided box trolley	23, 24	single-end trolley	18 - 22
metal-sided trolley	23	skids	11, 74 - 79
N		small order picking trolley	63
newspaper truck	87	stackable	72, 73, 103, 107 - 110
non-slip pedal	71	stacking corners	103 - 105
O		Stacking frame with drip tray	95
oil-tight	52, 53, 91, 92, 93	stair-climber truck	81, 82
order-picking trolley	39, 59	staple for padlock	23
outlet cock	10, 92, 93	star wheel	81, 82, 84
P		steel-cylinder stand	86
pallet converter	107 - 114	steel-cylinder truck	85, 86
pallet dolly	104, 105	steps	59
paper transport dolly	42	store-room trolley	18
parcel trolley	33	supporting wheel	71
parcel truck	87	system dolly	67
pegboard tool panel	10, 46	system trolley with tubular supports	56
pipe carrier	58	T	
plastic clip	73	t-handle lock	36, 51
plastic load surface	9	table trolley	26, 28 - 30, 52, 53
platform trolley	14	table transporter	65
pneumatic wheels	9, 11, 75 - 84, 86, 87, 89, 90, 94, 97 - 101	telescopic extensoin	71
polyamide wheel	8, 9, 90, 91, 95, 116, 117	thorn bracket	58
polyurethane wheels	8, 9, 69, 95	three-sided trolley	19 - 22, 31, 33
protective strip	9	tilting	39, 40, 44, 58, 61 - 64, 105
puncture-proof	11, 81	tipping unit	105
push-and-pull bar	73	tool box	86
push-bar trolley	14, 18, 21, 30	trailer	95
push-handle dolly	66	tray	37, 38
Q		triple-Dog	117
quick-lift jack	102, 103	trolley bay starter unit	17
R		tubular support	56
revolving buffers	9	tubular-steel truck	75, 76, 79
roller shutter door	36	turntable steering	98 - 101
roll stand	96	two-wheeled platform	102, 103
roll truck	96	tyre rack	72
S		tyre trolley	72
safety chain	17, 85, 86	tyre truck	71
safety handle	11, 74 - 86, 89 - 101	W	
screen-printed panel	16, 18, 21, 22, 29, 43, 51, 69, 97 - 102	wall	19 - 22, 31- 33, 97 - 101, 103
self-tipper	95	waste collection stand	94
serving trolley	41	water-resistant	16, 18, 21, 22, 29, 44, 51, 69, 97 - 102
shaft	97, 100, 101, 104	workpiece trolley	58
sheet-material stand	56	workshop trolley	46 - 51
sheet-material trolley	56, 57		
sheet-material truck	55		
shelf trolley	12, 27, 31 - 41		





www.variofit.eu

Cordes GmbH & Co. KG
Weißenfelder Straße 1
D - 21698 Harsefeld
tel.: +49 (0) 4164 816-0
fax: +49 (0) 4164 5427
email: info@cordes.eu

Transport Systems

Your **VARIOfit**® dealer

SC NEVA BUSINESS TECHNOLOGY SRL
www.carucioareprofesionale.ro
office@carucioareprofesionale.ro
Tel: 0756237877

